

1 IMPORTANT NOTE

Fixture comes partially assembled.

⚠ Ensure electrical circuit is disconnected before installation.

⚡ Luminaires must be installed in accordance with National electrical code and local regulation.

2 INSTALLATION STEPS

STEP 1

Unfasten the (1 or 4) fascia screws and remove fascia assembly. Set aside on a soft surface to protect finish.

STEP 2

Disengage the (4) latches and remove the diffuser.

STEP 3

Mark locations of the wall anchors by aligning backbox power entry hole over junction box. Fasten backbox to wall using anchors and mounting screws; before tightening screws, seal with caulking around and under screw heads.

STEP 4

Make appropriate connections to power supply wires.

STEP 5


Re-attach diffuser ensuring that the panel tabs are at the top (FIG 2)

STEP 6

Re-attach fascia assembly.

STAINLESS STEEL MAINTENANCE:

to maintain the finish of 316 stainless steel it is recommended to wash the luminaire with water from time to time to stop salt and corrosive elements building up. If tea staining appears, a commercially available stainless steel cleaner is recommended to remove discoloration.

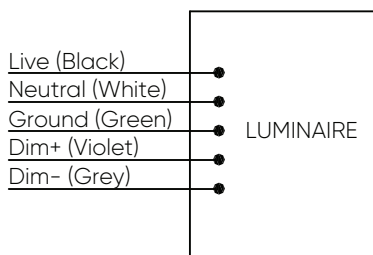

IMPORTANT:

For wet locations a 1/4" bead of Waterproof caulking compound (such as Silicone, acrylic latex, or butyl) must be Placed around the rear inside edge of the Backbox enclosure before securing to the Wall. Failure to do so could result in water Entering the fixture or junction box .

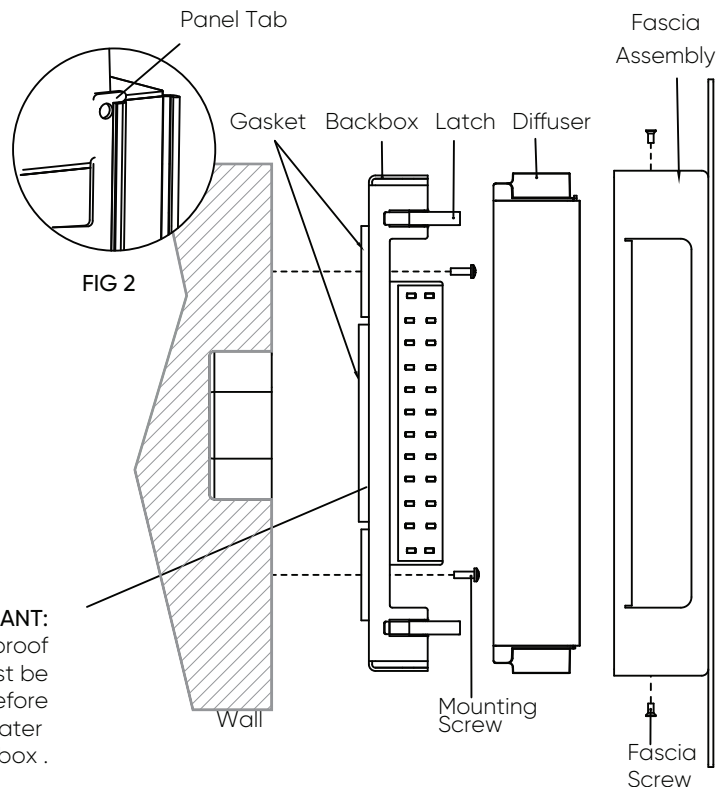


FIG 1