

1 DRIVER REPLACEMENT INSTRUCTION



Place the fixture in the flat surface




Remove the diffuser




Using angle long nose flyer and angle pointed hook tool, remove the wires connected to the small terminal block of the LED. NOTE: USE A FINGER CLOTS WHEN HANDLING THE LEDs



Place the pointed portion of the angle pointed tool to the small hole of the terminal block and carefully remove the wire by angle longnose flyer

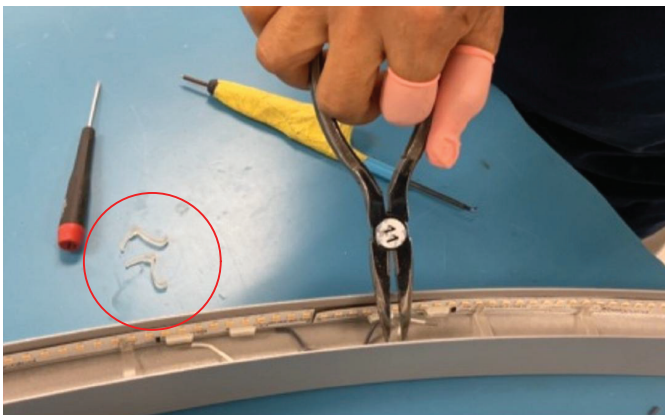

Remove the the clips holding the LEDs

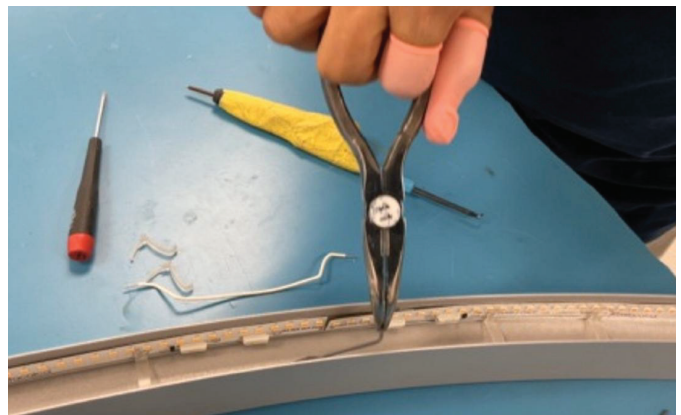

Remove the wires from the LEDs



Remove the defective LEDs




Place the new LEDs in the frame



Insert the clips to secure the LEDs in place



Properly connect the wires to the LEDs

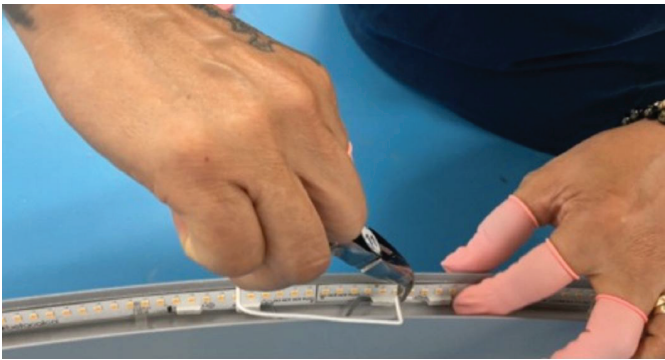


Properly connect the wires to the LEDs



Insert the clips to secure the end portion of the LEDs



Insert the diffuser in place

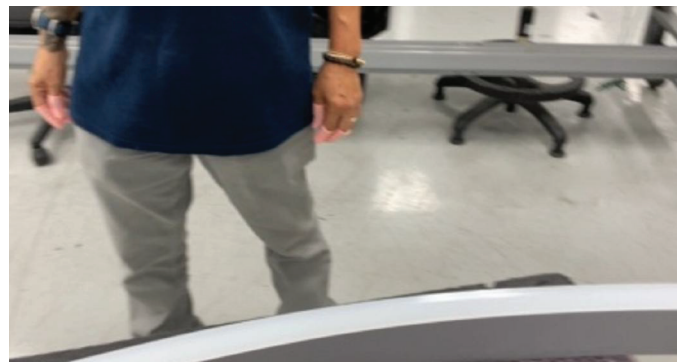

Finish product