

TIAL™ - CEILING SURFACE



Project Name:	Fixture Type:
Fixture Code:	Quantities:

A. LUMINAIRE

- 270100 A Type, 1571 lms, 9" x 9"
- 270102 B Type, 2665 lms, 9" x 9"
- 270104 C Type, 3592 lms, 9" x 9"
- 270106 D Type, 2131 lms, 11" x 9"
- 270108 E Type, 3028 lms, 11" x 9"

B. CCT

- 30 3000K (min 80 CRI)
- 35 3500K (min 80 CRI)
- 40 4000K (min 80 CRI)

C. OPTIONS

- EM Integral Emergency

D. OPTIONAL LOW VOLTAGE

- EV Low Voltage

To be used with DE only.


E. OPTIONAL DIMMING

- DE PoE


DE must be used with EV only.

TIAL™ - CEILING SURFACE


DIMENSIONAL DIAGRAMS

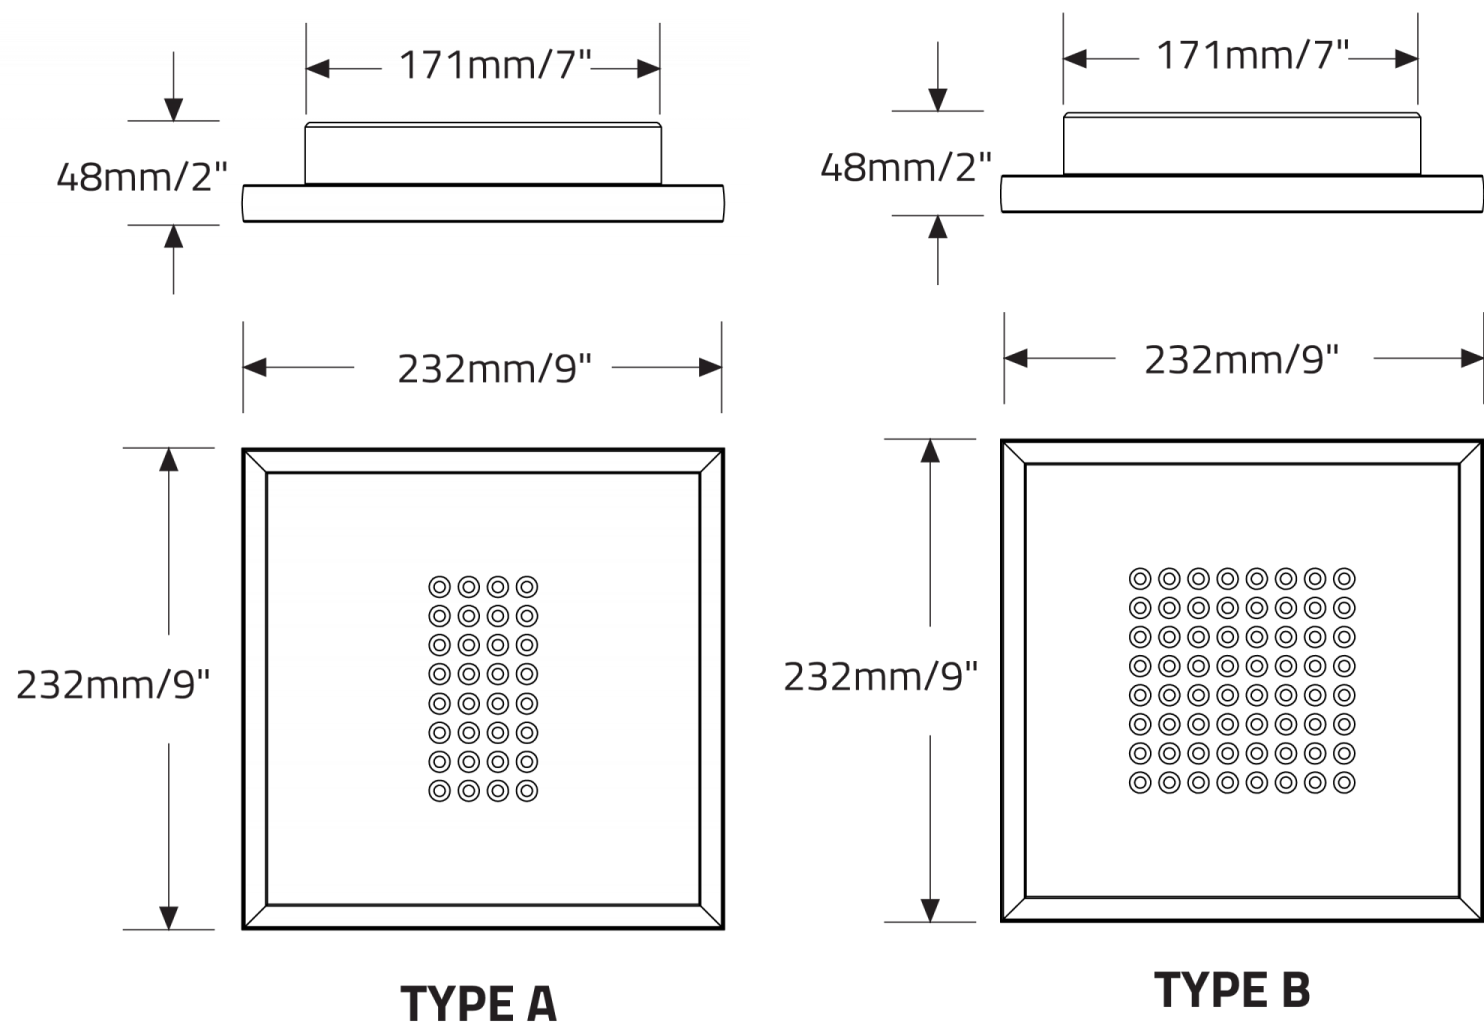

TIAL™ - CEILING SURFACE

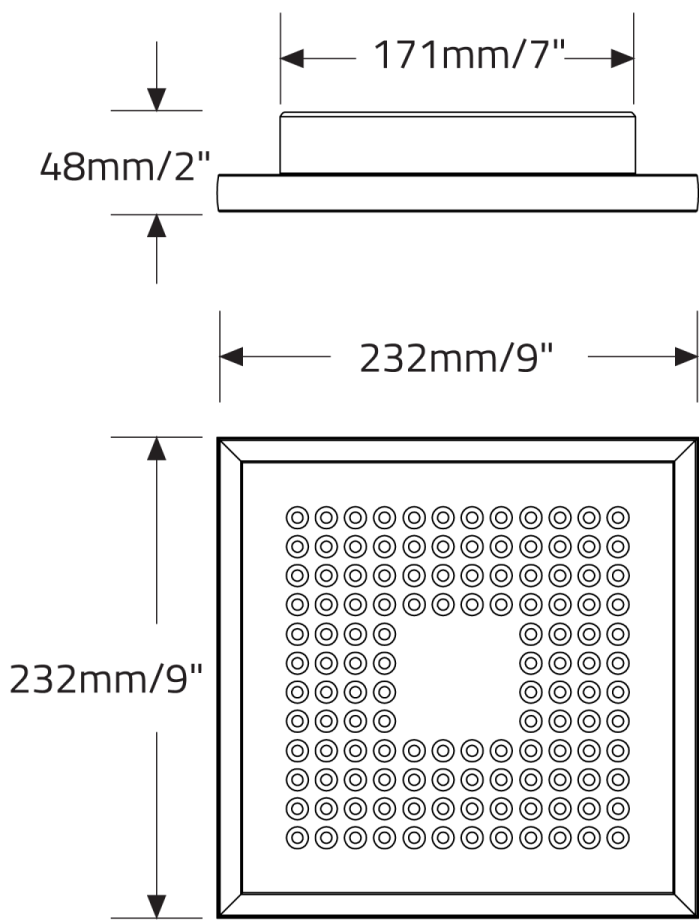


TYPE C

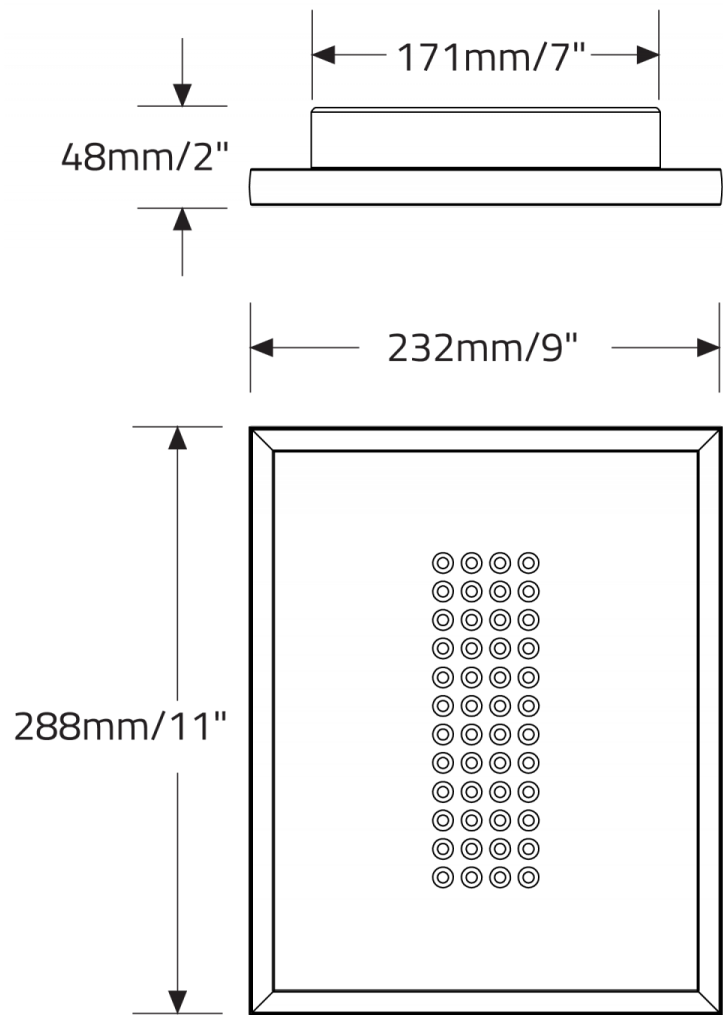

TYPE D

TIAL™ - CEILING SURFACE

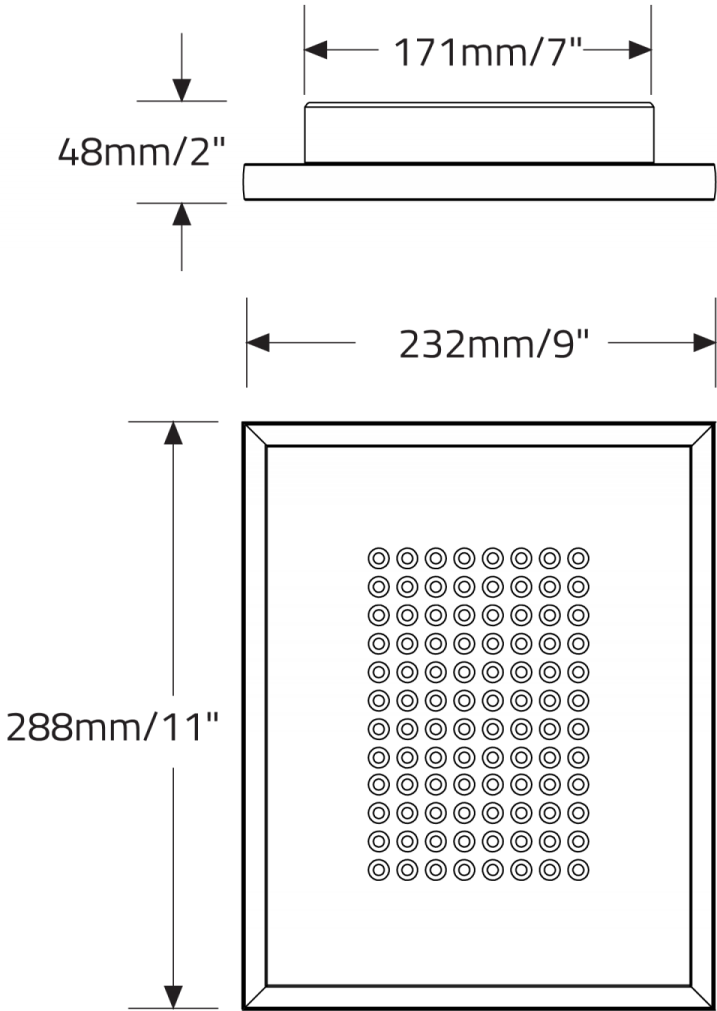

TYPE E