

TRAY™ - CEILING SURFACE



Project Name:	Fixture Type:
Fixture Code:	Quantities:

A. LUMINAIRE

ABN1 12" x 25", 848 lms	ABN2 12" x 45", 2157 lms	ABN3 12" x 94", 5325 lms	ABN4 20" x 30", 4810 lms
ABN5 20" SQ, 2389 lms	ABN6 30" SQ, 9557 lms		

B. CCT

J2 3000K (min 80 CRI)	J3 3500K (min 80 CRI)	J4 4000K (min 80 CRI)	
-----------------------	-----------------------	-----------------------	--

C. DIMMING

D1 0-10V Dimming (1.0%)	D2 0-10V Dimming (0.1%)	D3 347V, 0-10V Dimming (1.0%)	D4 DALI Dimming (0.1%)
D5 DALI Dimming (1.0%)	D6 DSI (EU only)	D7 switchDim (EU only)	DA45 PoE

D6 & D7 dimming not available in North America.
DA45 must be used with EV only.

D. FINISH - FRONT FRAME

G1 White	G02 Black Metallic - Textured	G20 Silver Metallic - Textured	G25 Gold Metallic - Textured
G44 Midnight Blue Metallic - Textured	G45 Copper Metallic	G46 Charcoal Metallic - Textured	G47 Bronze Metallic - Textured
G52 Champagne Metallic	G53 Red Metallic - Textured		

E. FINISH - BACK FRAME

H1 White	H02 Black Metallic - Textured	H20 Silver Metallic - Textured	H25 Gold Metallic - Textured
H44 Midnight Blue Metallic - Textured	H45 Copper Metallic	H46 Charcoal Metallic - Textured	H47 Bronze Metallic - Textured
H52 Champagne Metallic	H53 Red Metallic - Textured		

F. LUMEN OUTPUT

L0 100% of standard output	L1 Lumen & wattage reduction to approximately 75% of standard output	L2 Lumen & wattage reduction to approximately 50% of standard output	
----------------------------	--	--	--

ABN1 not available with L1 or L2

G. EMERGENCY

E0 Emergency system not required	E2 Emergency system - Remote		
----------------------------------	------------------------------	--	--

H. OPTIONAL LOW VOLTAGE


EV Low Voltage			
----------------	--	--	--

To be used with DA45 only.


TRAY™ - CEILING SURFACE

DIMENSIONAL DIAGRAMS


ABN1

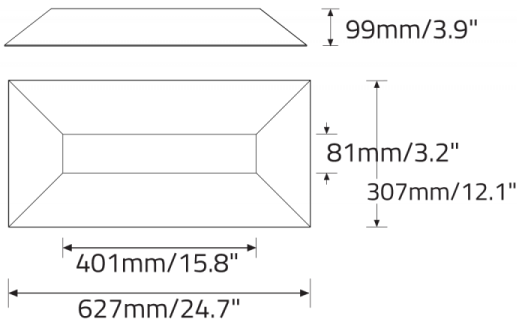


ABN2

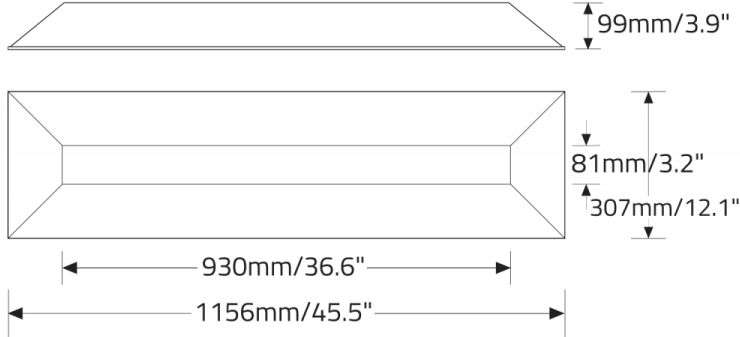


ABN3

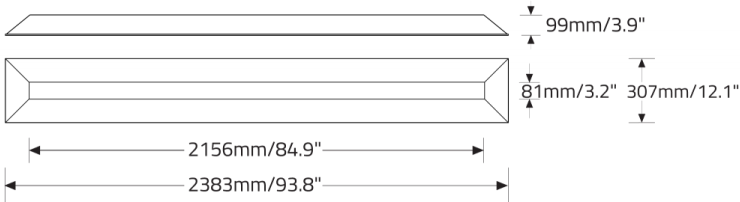

ABN4

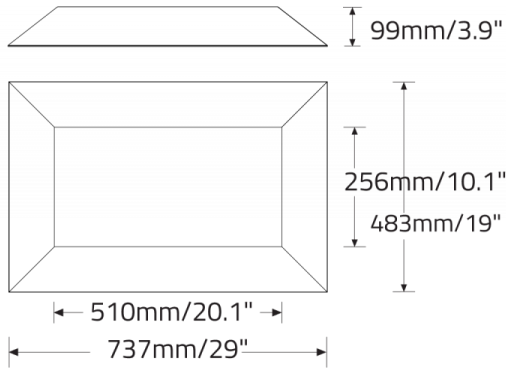

ABN5

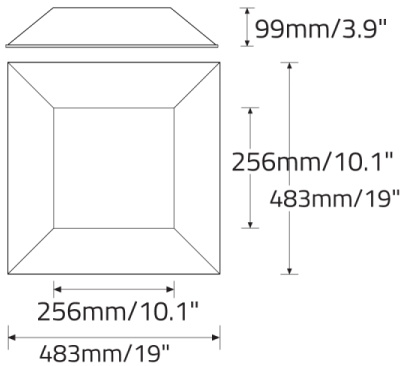

ABN6

