

BLADE II™ - WALL SURFACE EXTERIOR

Project Name:	Fixture Type:
Fixture Code:	Quantities:



BLADE II™ - WALL SURFACE EXTERIOR

GENERAL SPECIFICATION

Body and trim

Die-cast aluminium.

Finish

Silver powder coated, RAL9006.

Front fascia

Injection molded plastic, UV stabilised, painted RAL9006. Front fascia can be custom painted to special order (Consult factory).

Gasketing

Heat resistant silicone.

Drivers

HPF, electronic for 120-277V (EU-240V).


Minimum Starting Temperature

-30°C.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

MOUNTING & OPTICS

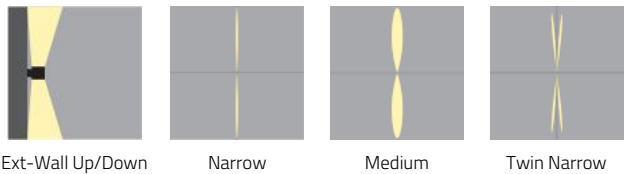

Ext-Wall Up/Down

Narrow

Medium

Twin Narrow

BLADE II™ - WALL SURFACE EXTERIOR

HOW TO ORDER

A. LUMINAIRE

662004 662004	662014 662014	662024 662024	662034 662034
662044 662044			

B. CCT

30 3000K (min 80 CRI)	40 4000K (min 80 CRI)	B Blue
------------------------------	------------------------------	---------------

C. DIMMING

DB Dimming 0-10V (10%)

TECHNICAL DATA

LUMINAIRE

Code	662004	662014	662024	662034	662044
2 x 3W	Narrow Beam	Medium/Narrow Beam	Medium Beam	Twin/Narrow Beam	Twin Beam
Beam	10°	40°/10°	40°	2x5°/10°	2x5°
Delivered lms	2 x 236	2 x 236	2 x 236	2 x 236	2 x 236

APPROVALS



BLADE II™ - WALL SURFACE EXTERIOR

DIMENSIONAL DIAGRAMS

