


FIN™ - WALL RECESSED EXTERIOR

Project Name:	Fixture Type:
Fixture Code:	Quantities:

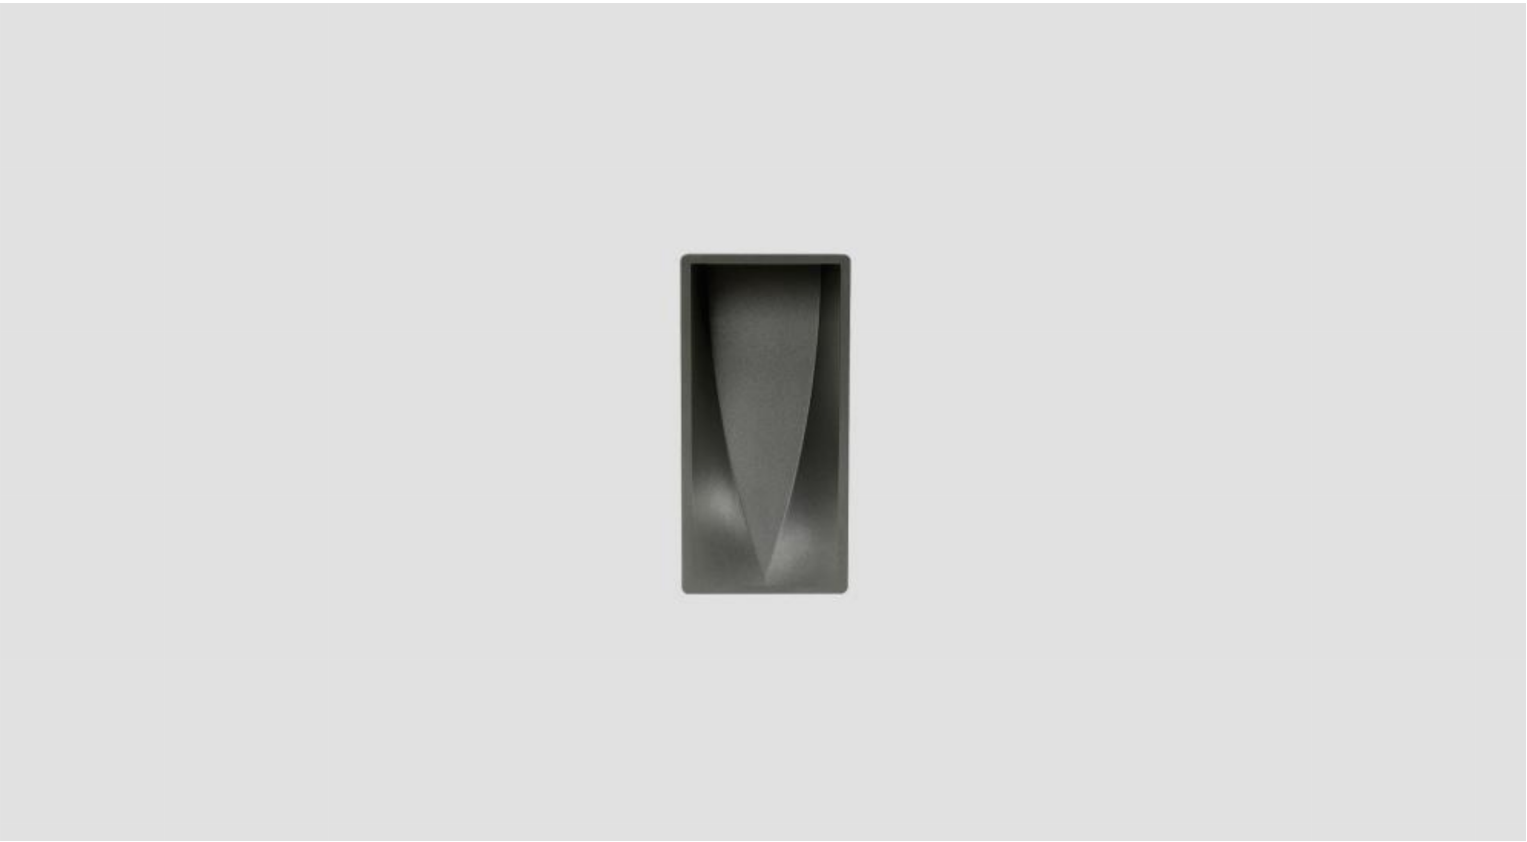

FIN™ - WALL RECESSED EXTERIOR

GENERAL SPECIFICATION

Housing Die-cast and extruded aluminum.	External Screws Stainless steel.
Lens Etched glass.	Gaskets One piece silicone.
Finish Silver powder coated RAL9006 or black powder coated.	Drivers HPF electronic 120-277V (EU-240V).
Cable entry M20 cable gland.	Recessed housing Die formed stainless steel.
Delivered Lumens Delivered lumens & LPW based on 3000K (min 80 CRI).	

MOUNTING & OPTICS



Ext-Wall Recessed
Uplight



Ext-Wall Recessed
Downlight



Assymetrical

FIN™ - WALL RECESSED EXTERIOR

HOW TO ORDER

A. LUMINAIRE

8306501 16W LED, 1215 lms

B. CCT

30 3000K (min 80 CRI)

40 4000K (min 80 CRI)

C. FINISH

BL Black

AG Anthracite Gray

GR Light Gray (RAL 9006)

D. SPEICFY ROUGH-IN HOUSING (REQUIRED)

8306590 Rough-In Housing

E. OPTIONS

DB Dimming (0-10V, 10%, 120V only)

FIN™ - WALL RECESSED EXTERIOR

TECHNICAL DATA

LUMINAIRE

Code	8306501
Distribution	16W LED
Delivered lms	1215
LPW	76

APPROVALS



FIN™ - WALL RECESSED EXTERIOR

DIMENSIONAL DIAGRAMS

