


SENTI™ - WALL SURFACE EXTERIOR

Project Name:	Fixture Type:
Fixture Code:	Quantities:

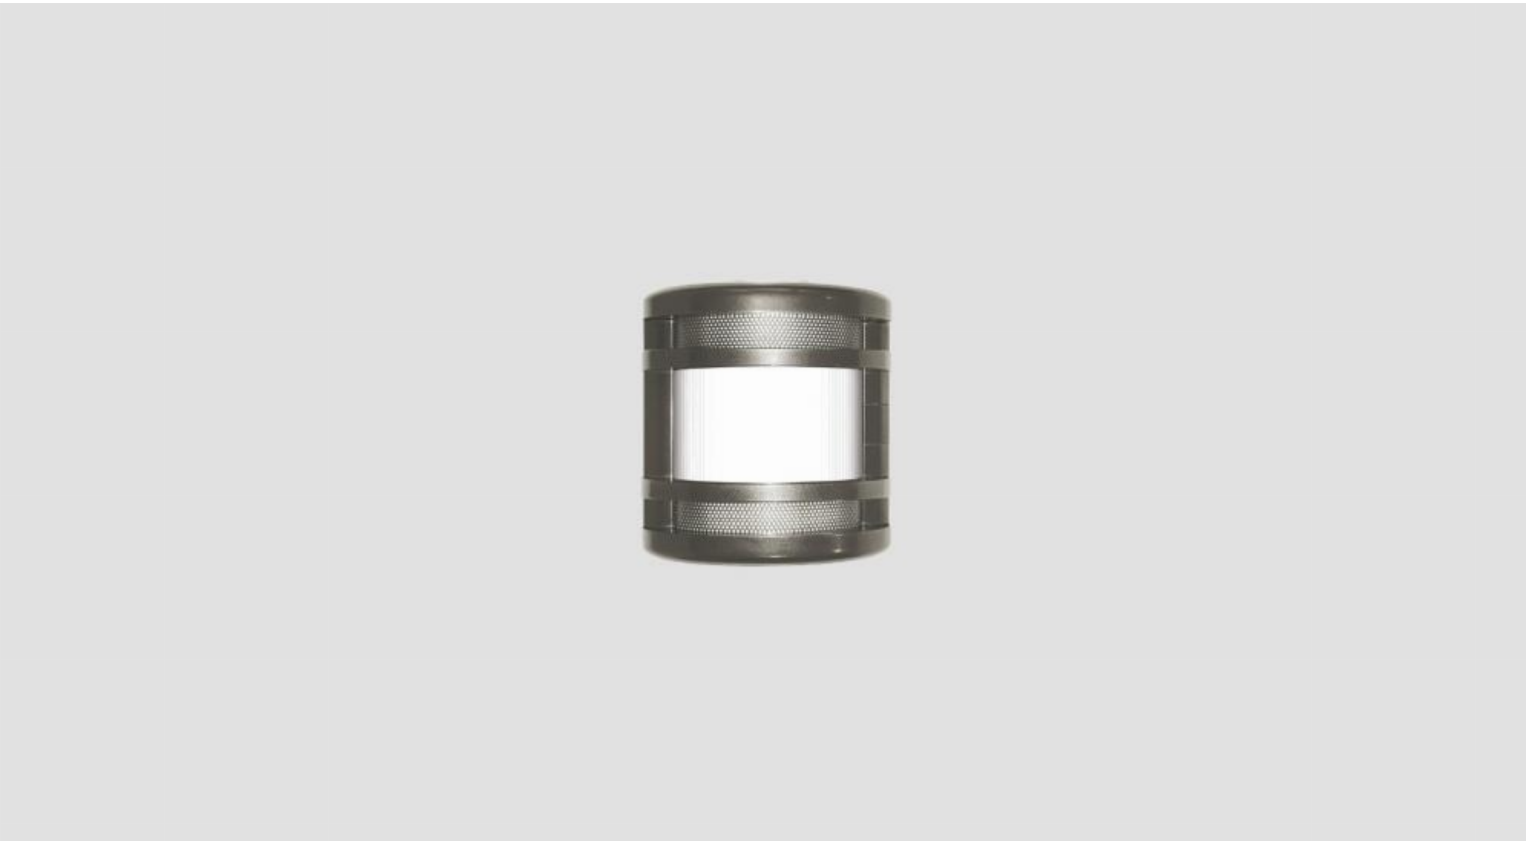

SENTI™ - WALL SURFACE EXTERIOR

GENERAL SPECIFICATION

Housing

Die-cast and extruded (low copper) aluminium. Front housing hinges open for access and secures via a bolt hidden behind a spring loaded flap. Central perforated mesh band, optional (PM).

Gaskets

One piece silicone.

LED arrangement

Single LED to illuminate front diffuser. Single LED for narrow beam. Three LEDs for wide beam.

Minimum Starting Temperature

-25°C (-13°F).

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Finish

Exterior grade, metallic powder coated paint.

Diffuser

UV stabilised polycarbonate.


Drivers

HPF, electronic, 120-277V (EU-240V).

Mechanical

Mounts directly over a standard electrical junction box (by others - North America only). Mounting hardware (by others).

MOUNTING & OPTICS



Ext-Wall

SENTI™ - WALL SURFACE EXTERIOR

HOW TO ORDER

A. LUMINAIRE

320201 320201	320211 320211	320221 320221	320231 320231
320241 320241			

B. CCT

30 3000K (min 80 CRI)	40 4000K (min 80 CRI)
------------------------------	------------------------------

C. FASCIA

ER Elliptical Rings	TB Twin Bars
----------------------------	---------------------

D. FINISH

MS Silver Metallic	MB Metallic Bronze	F39 Other painted finish (RAL number required)	F40 Other Non-RAL painted finish (sample chip required)
---------------------------	---------------------------	---	--

F39 & F40 have a one time set-up charge regardless of quantity.

E. OPTIONS

PM Perforated Band (applies to middle section only)

SENTI™ - WALL SURFACE EXTERIOR

TECHNICAL DATA

LUMINAIRE

Code	320201	320211	320221	320231	320241
Power (LED)	8W	12W	17W	5W	10W
Beam	Narrow/Narrow	Narrow/Wide	Wide/Wide	Single Narrow	Single Wide

APPROVALS



SENTI™ - WALL SURFACE EXTERIOR

DIMENSIONAL DIAGRAMS

