

CRISTAL LRG™ - INGROUND EXTERIOR

Project Name:	Fixture Type:
Fixture Code:	Quantities:

CRISTAL LRG™ - INGROUND EXTERIOR

GENERAL SPECIFICATION

Housing Die-cast aluminum. Walk over 1000Kg/2200lbs.	External Screws Stainless steel.
Lens 6mm/0.25" sandblasted glass with clear windows for LEDs.	Gaskets One piece silicone.
Drivers HPF, electronic for 120-277V (EU-240V). 0-10V dimming 120-277V.	Minimum Starting Temperature -30°C.
Conduit entry PG11 gland for 11mm/0.625" DIA cable.	Recessed housing Molded polypropylene, gray, with stainless mounting trim. Specify as a separate line item.
Delivered Lumens Delivered lumens and LPW based on 3000K (min 80 CRI).	

MOUNTING & OPTICS



Ext-Inground

CRISTAL LRG™ - INGROUND EXTERIOR

HOW TO ORDER

A. LUMINAIRE

810128 810128 **810129** 810129 **810127** 810127

B. CCT

30 3000K (min 80 CRI) **40** 4000K (min 80 CRI)

C. RECESSED HOUSING (REQUIRED)

810902 Recessed Housing for Wall Installation **810903** Recessed Housing for Inground Installation

TECHNICAL DATA

LUMINAIRE






Code	810128	810129	810127
Power	16W	16W	16W
Type	Glass Only	Glass Only	Glass Only
Distibution	Wall	Inground 10°	Inground 36°
Delivered lms	892	1049	1049

APPROVALS




CRISTAL LRG™ - INGROUND EXTERIOR

DIMENSIONAL DIAGRAMS

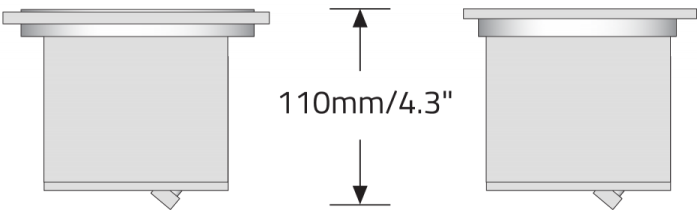


SS Bezel

Glass only



Wall



Inground