

ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

Project Name:	Fixture Type:
Fixture Code:	Quantities:



ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

GENERAL SPECIFICATION

Housing
Die-cast and extruded aluminum.

Lens
Clear glass.

Reflector
High purity aluminum, silver anodized.

Drivers
HPF, electronic for 120-277V (EU-240V). Dimming 0-10V.

Weight
Maximum 4Kg/8.8lb.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

External Screws
Stainless steel.


Gaskets
One piece silicone.

Finish
Silver powder coated light gray or black powder coated as standard.

Minimum Starting Temperature
-30°C for LEDs.

Mechanical
Mounts directly over an electrical junction box (by others - Noth America only).
Mounting hardware (by others).

MOUNTING & OPTICS

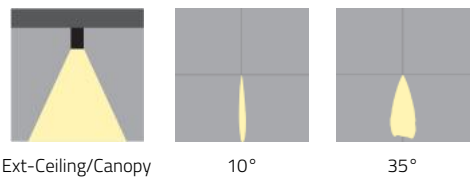

ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

HOW TO ORDER

A. LUMINAIRE

267133 267133 **267143** 267143

B. CCT

30 3000K (min 80 CRI) **40** 4000K (min 80 CRI)

C. FINISH

BL Black **GR** Light Gray

D. OPTIONS

DB Dimming (0-10V, 10%)

TECHNICAL DATA

LUMINAIRE


Code	267133	267143
Power (LED)	14W	14W
Beam	10°	35°
Delivered lms	1049	1049

APPROVALS





ONE4TWO CL™ - CEILING & CANOPY EXTERIOR

DIMENSIONAL DIAGRAMS



150mm/6"

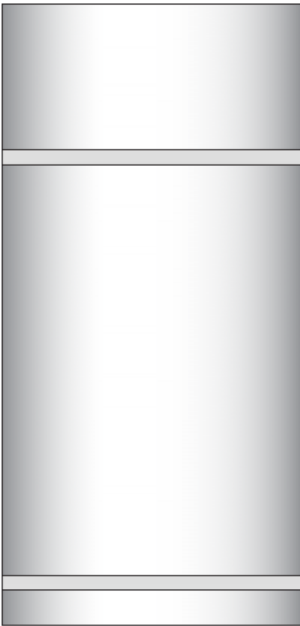

291mm/11.5"