

FIN™ - BOLLARDS

Project Name:	Fixture Type:
Fixture Code:	Quantities:



FIN™ - BOLLARDS

GENERAL SPECIFICATION

Housing

Die-cast and extruded aluminium.

Lens

Etched glass.

Finish

Silver powder coated RAL9006 or black powder coated.

Cable entry

M20 cable gland.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

External Screws

Stainless steel.

Gaskets

One piece silicone.

Drivers

HPF, electronic for 120-277V (EU-240V).

Mounting

Anchorage rods required for concrete.

MOUNTING & OPTICS



Ext-Bollards Downlight



Ext-Bollards Uplight



Assymetrical

FIN™ - BOLLARDS

HOW TO ORDER

A. LUMINAIRE

8307601 16W Down, 1215 lms **8307603** 16W Up, 1215 lms **8307611** 16W Down, 1215 lms **8307613** 16W Up/Down, 1215 x 2 lms

B. CCT

30 3000K (min 80 CRI) **40** 4000K (min 80 CRI)

C. FINISH

BL Black **GR** Light Gray RAL 9006

D. OPTIONS

8307699 Anchorage base for poured concrete **DB** Dimming (0-10V, 10%)

TECHNICAL DATA

LUMINAIRE


Code	8307601	8307603	8307611	8307613
Power (LED)	16W Down	16W Up	16W Down	16W Up/Down
Delivered lms	1215	1215	1215	1215 x 2
LPW	76	76	76	76
Type	A	A	B	C
Weight	13.2lb	13.2lb	26.4lb	26.4lb

APPROVALS



FIN™ - BOLLARDS

DIMENSIONAL DIAGRAMS

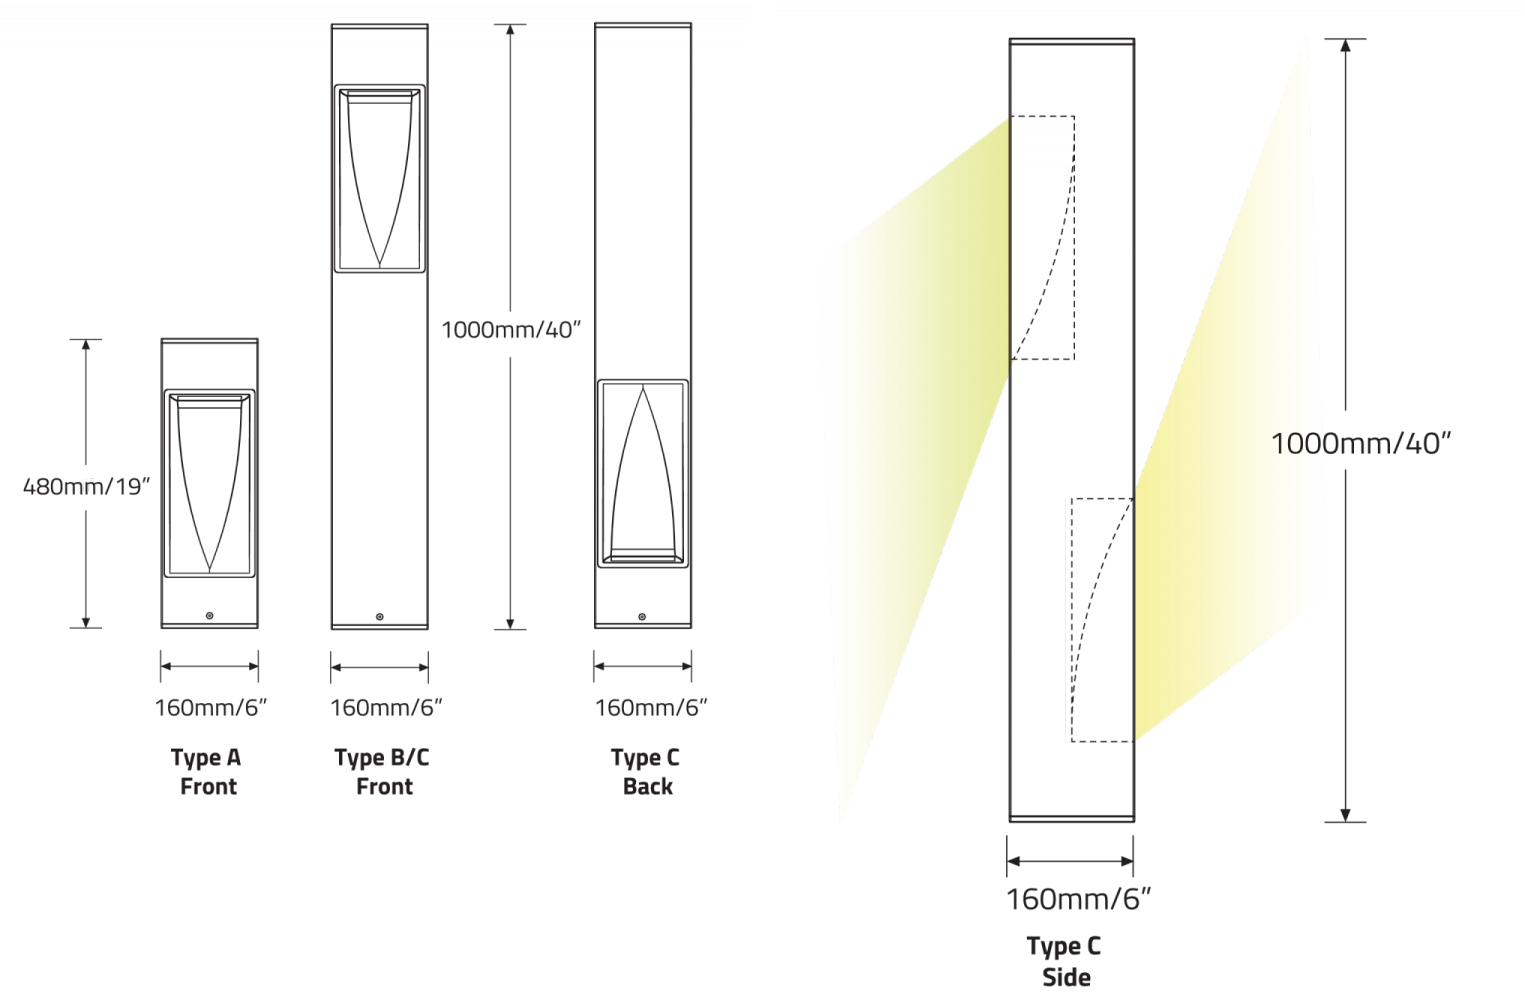

FIN™ - BOLLARDS

