


MICRO SQ DE™ - INSIDE/OUTSIDE

Project Name:	Fixture Type:
Fixture Code:	Quantities:

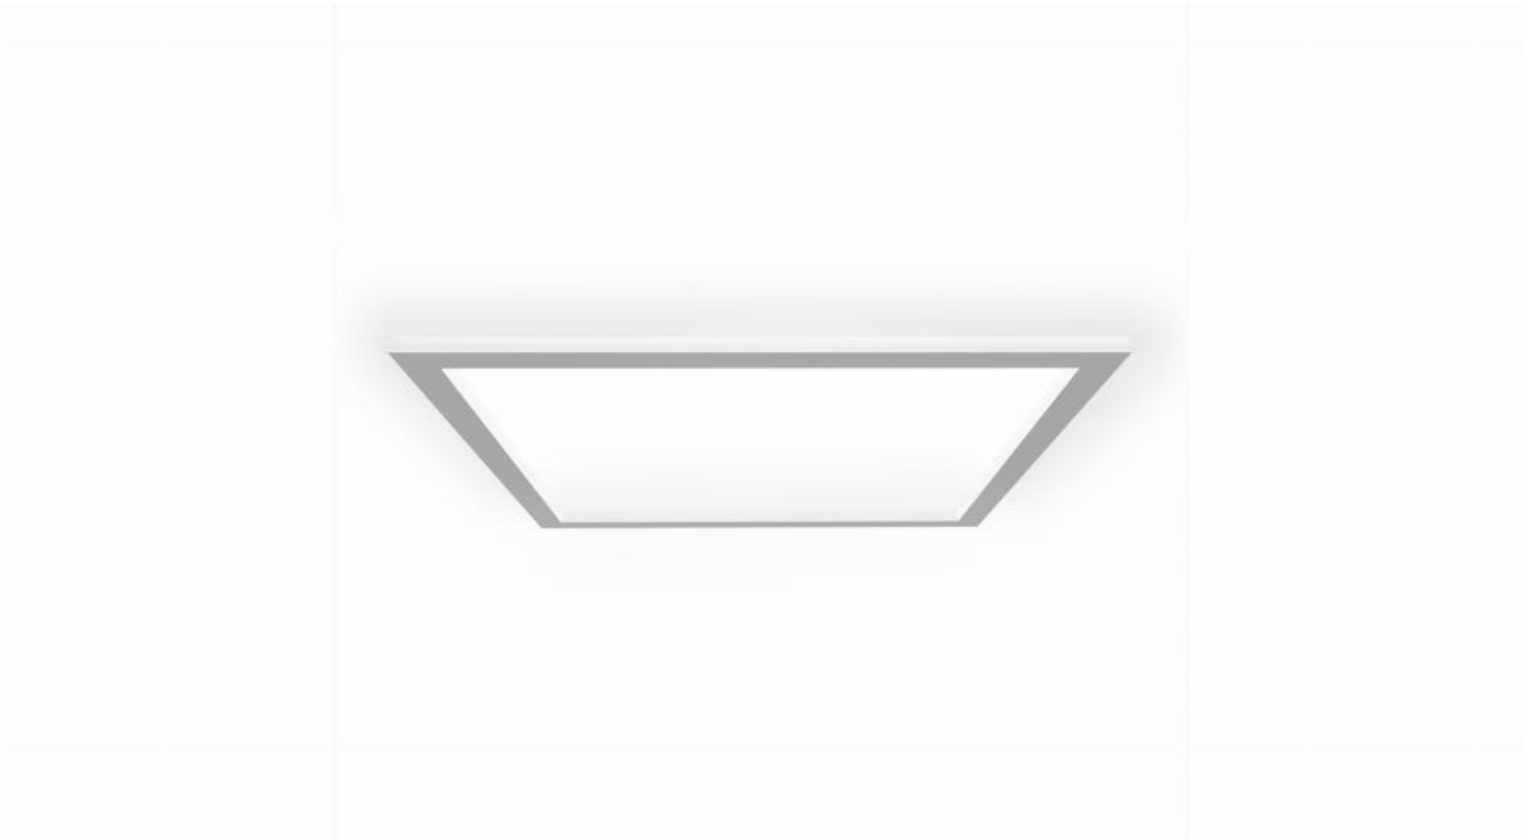


MICRO SQ DE™ - INSIDE/OUTSIDE

GENERAL SPECIFICATION

Body Aluminium.	Finish Powder coated.
Diffusers Frosted Polycarbonate.	Drivers Remote, HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming standard. Wire size 18 AWG - max distance (from fixture to drivers)40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.
L70 @25°C > 50,000 hrs.	Delivered Lumens Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.

MOUNTING & OPTICS



Ceiling Inside/Outside Wall Inside/Outside

MICRO SQ DE™ - INSIDE/OUTSIDE

HOW TO ORDER

A. LUMINAIRE

982305 982305	982310 982310	982320 982320	982330 982330
982340 982340			

B. CCT/COLOUR (OUTSIDE)

T30 3000K (min 80 CRI)	T35 3500K (min 80 CRI)	T40 4000K (min 80 CRI)	TRD Red
TGN Green	TBL Blue		

C. CCT/COLOR (INSIDE)

S30 3000K (min 80 CRI)	S35 3500K (min 80 CRI)	S40 4000K (min 80 CRI)	SRD Red
SGN Green	SBL Blue		

D. FINISH

WH White	BL Black	MS Silver Metallic	Z1 Wood Grain - Light Cherry
Z2 Wood Grain - Dark Walnut			

TECHNICAL DATA

LUMINAIRE

Code	982305	982310	982320	982330	982340
Diameter (A)	24"	35"	48"	60"	73"
Power (LED)	53W	80W	110W	134W	165W
Delivered lms	4157	6256	8587	10606	13105
LPW	78	78	78	79	79

APPROVALS



MICRO SQ DE™ - INSIDE/OUTSIDE

DIMENSIONAL DIAGRAMS

