


# BANGLE™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:

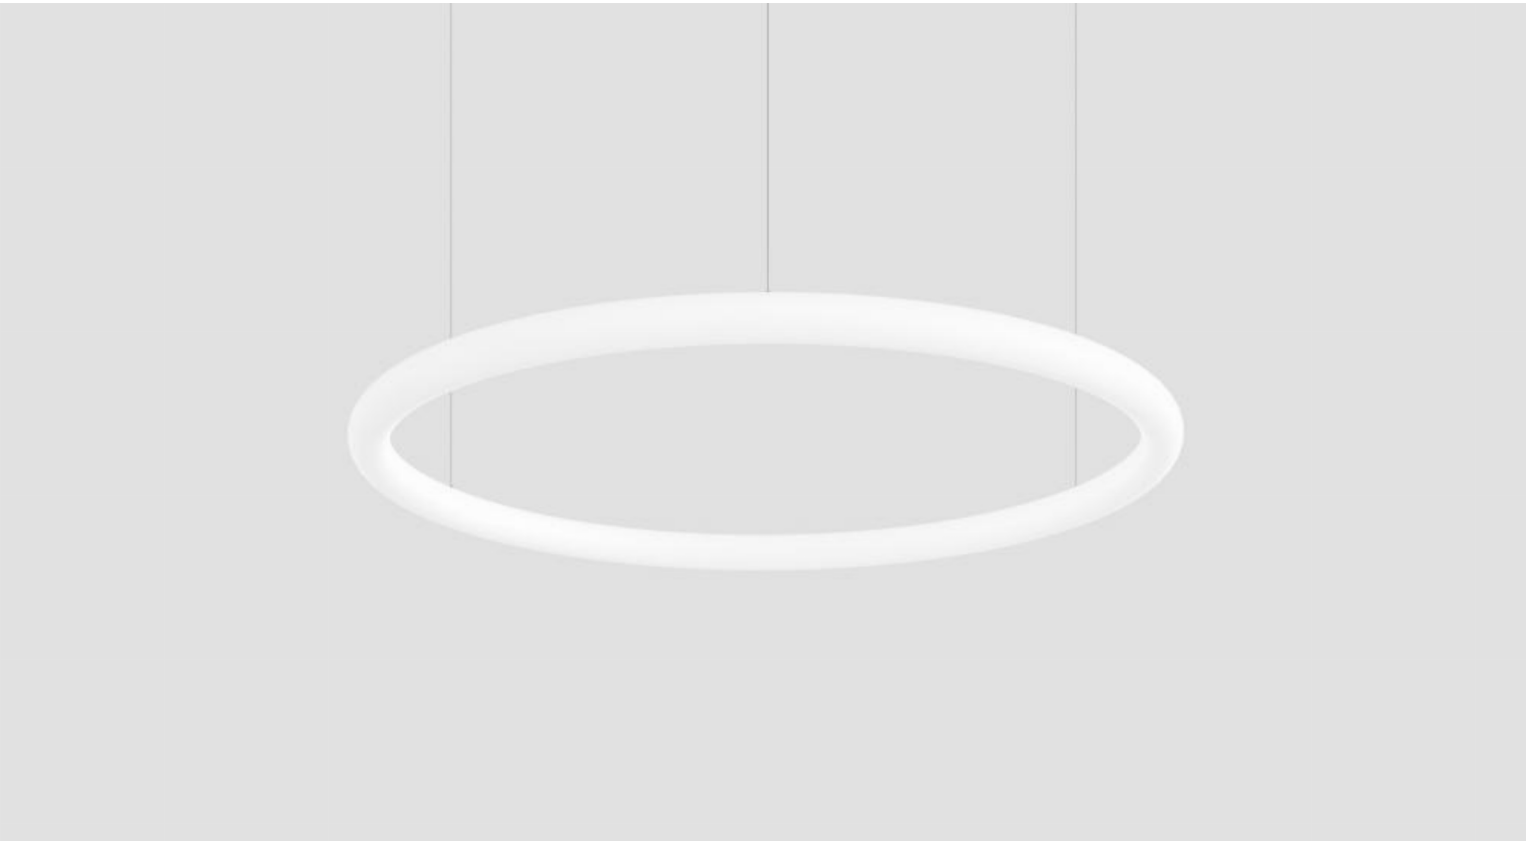

# BANGLE™ - SUSPENDED

Bangle™ is a tubular luminous shape that emits light spatially across all planes. It features a highly efficient diffuser which delivers 78 LPW whilst providing uniform illumination. With its distinct combination of aesthetics and high performance it can be used as the sole light source in any environment. Given its versatility it can be used in a whole host of contemporary or traditional environments such as lobbies, stores, offices, schools and places of worship. With power over aircraft cables as standard, Bangle provides a clean and minimalist architectural installation.


## GENERAL SPECIFICATION

<b>Body</b> Aluminum and steel.	<b>Canopy Finish</b> White Powder coated.
<b>Power cable/Suspension</b> Power over aircraft cables.	<b>Diffuser</b> Acrylic.
<b>Drivers</b> HPF electronic drivers for 120-277V (EU-240V).	<b>Mechanical</b> Luminaires mount directly over J box (by others - North America only).
<b>L70 @25°C</b> > 50,000 hrs.	<b>Delivered lumens</b> Delivered lumens & LPW based on 4000K CRI 90+.
<b>Approvals</b> Damp Location (Indoor use only).	

## MOUNTING & OPTICS



Suspended Direct/Indirect



Direct-indirect

# BANGLE™ - SUSPENDED

## HOW TO ORDER

### A. LUMINAIRE

<b>BANP1P02</b> 24", 2700 lms	<b>BANP1P03</b> 36", 4300 lms	<b>BANP1P04</b> 48", 6200 lms	<b>BANP1P05</b> 60", 7400 lms
<b>BANP1P06</b> 72", 8800 lms			

### B. CRI

**CR90** CRI 90+

### C. CCT

**CTA35** 3500K

### D. VOLTAGE

<b>V1</b> 120/277V	<b>V2</b> 240V <sup>1</sup>
--------------------	-----------------------------

347V is not available.  
<sup>1</sup> Not available in North America.

### E. DIMMING

<b>DA00</b> Not required	<b>DA10</b> 0-10V Dimming 10%
--------------------------	-------------------------------

# BANGLE™ - SUSPENDED

## TECHNICAL DATA

### LUMINAIRE

Code	BANP1P02	BANP1P03	BANP1P04	BANP1P05	BANP1P06
Diameter A	24"	36"	48"	60"	72"
Wattage	35W	57W	83W	100W	120W
Delivered lms	2700	4300	6200	7400	8800
LPW	78	75	74	74	74
Suspension Points	3	3	3	6	6

## APPROVALS



# BANGLE™ - SUSPENDED

## DIMENSIONAL DIAGRAMS

