

XACARA S™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:




XACARA S™ - SUSPENDED

GENERAL SPECIFICATION

Body	Finish
Die cast aluminum.	Powder coated.
Suspension	Power cable
Single stainless steel aircraft cable or steel tube.	Clear with silver wires.
Reflectors	Drivers
Highly reflective, specular finish, vacuum plated.	HPF electronic, 120/277V (EU-240V).
L70 @25°C (77°F)	Delivered Lumens
> 60,000 hrs.	Delivered lumens & LPW based on 3000K (min 80 CRI).
Approvals	Note
Damp Location (Indoor use only).	<i>Photometric testing performed using LM79 procedures.</i>

MOUNTING & OPTICS

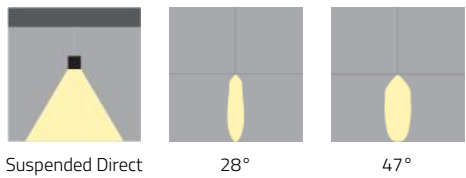

XACARA S™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

511100 38W

B. CCT/CRI (BRIDGELUX)

B430A 3000K, 80 CRI, 3045 lms	B430B 3000K, 90 CRI, 2471 lms	B435A 3500K, 80 CRI, 3133 lms	B435B 3500K, 90 CRI, 2674 lms
B440A 4000K, 80 CRI, 3185 lms	B440B 4000K, 90 CRI, 2686 lms		

C. REFLECTOR

ME Medium 28°	WD Extra wide 47°
----------------------	--------------------------

D. FINISH

BL Black	MS Silver Metallic	WH White
-----------------	---------------------------	-----------------

E. SUSPENSION

CS Cable Suspension	TS3 Tube 18"	TS4 Tube 24"	TS5 Tube 30"
TS6 Tube 36"	TS7 Tube 42"	TS8 Tube 48"	

F. DIMMING

D1 0-10V Dimming (1%)	D2 0-10V Dimming (0.1%)	DL DALI Dimming (1%)	DA DALI Dimming (0.1%)
L1 Lutron L3DA3W Hi-Lume 1%	L3 Lutron L3DAE Hi-Lume 1% EcoSystem		

XACARA S™ - SUSPENDED

TECHNICAL DATA

LUMINAIRE

Code	511100
Power (LED)	38W
LPW	83

CCT/CRI

Code	B430A	B430B	B435A	B435B	B440A	B440B
CCT	3000K	3000K	3500K	3500K	4000K	4000K
CRI	80	90	80	90	80	90
Delivered lms	3045	2471	3133	2674	3185	2686
LPW	80	65	82	70	83	70

APPROVALS



XACARA S™ - SUSPENDED

DIMENSIONAL DIAGRAMS

