


AXALIS TL™ - WALL SURFACE

Project Name:	Fixture Type:
Fixture Code:	Quantities:

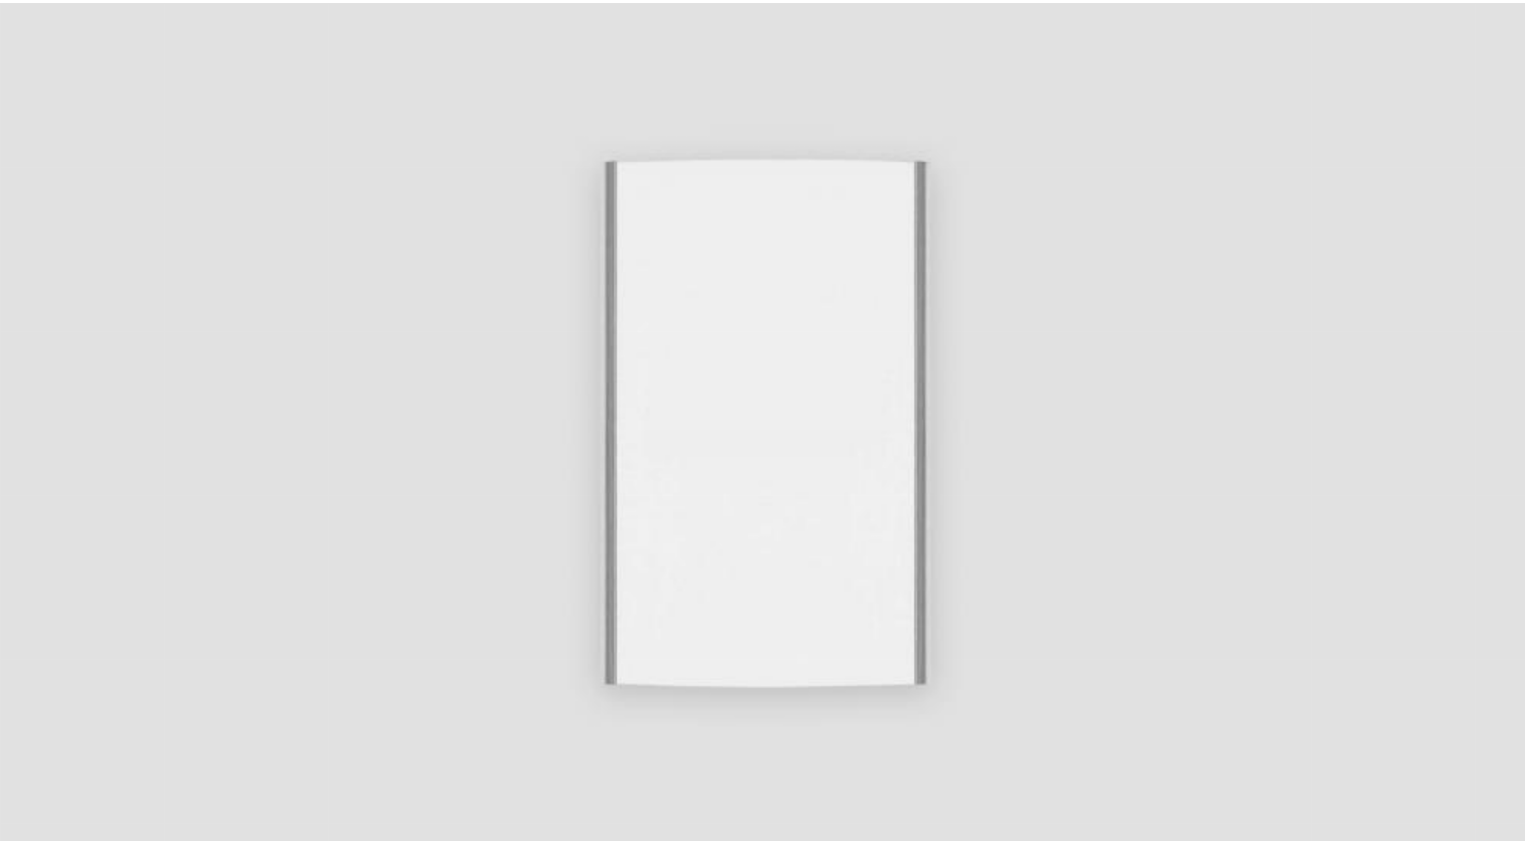

AXALIS TL™ - WALL SURFACE

GENERAL SPECIFICATION

Body and trim

Steel and extruded aluminum. Trim claws, die cast alloy.

Diffuser

Opal acrylic.

Drivers

HPF, electronic for 120-277V (EU-240V), 0-10V dimming (10%) standard.

Finish

Back plate, powder coated gloss white. Side trim, brushed aluminum. Trim claws, as listed.


Dust covers

Opal Polycarbonate.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

MOUNTING & OPTICS



AXALIS TL™ - WALL SURFACE

HOW TO ORDER

A. LUMINAIRE

701110 701110	701120 701120	701130 701130
----------------------	----------------------	----------------------

B. CCT

30 3000K (min 80 CRI)	35 3500K (min 80 CRI)	40 4000K (min 80 CRI)
------------------------------	------------------------------	------------------------------

C. OPTIONS

TM Trim Claws, Silver Metallic	TB Trim Claws, Black Chrome	TC Trim Claws, Polished Chrome	TP Trim Claws, Polished Brass
TS Trim Claws, Satin Brass			

TECHNICAL DATA

LUMINAIRE

Code	701110	701120	701130
Power (LED)	16W	24W	32W
Delivered lms	1244	1877	2462
LPW	80	79	80
Height (A)	15"	18"	23"

APPROVALS



AXALIS TL™ - WALL SURFACE

DIMENSIONAL DIAGRAMS

