

INSIDE/OUTSIDE



GENERAL SPECIFICATION

Body: Aluminum.

Finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Drivers: HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

Remote Mounting Of Drivers: Wire size 18 AWG - max distance (from fixture to drivers) 40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.


Mechanical: Luminaires attached directly to the J box (by others - North America only).

Diffusers: Frosted Polycarbonate.


L70 @25deg C: > 50,000 hrs.

Delivered Lumens: Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.


MOUNTING & OPTICS




Suspended
Inside/Outside




98 2005




98 2010



98 2020



98 2030



98 2040

HOW TO ORDER

A SPECIFY LUMINAIRE

Code	Size	Power (LED)	Delivered lms	LPW
98 2005	24" (610mm)	53W	4157	78
98 2010	36" (914mm)	80W	6256	78
98 2020	48" (1219mm)	110W	8587	78
98 2030	60" (1524mm)	134W	10606	79
98 2040	73" (1854mm)	165W	13105	79

B SPECIFY CCT/COLOR (OUTSIDE)

T30	3000K (min 80 CRI)
T35	3500K (min 80 CRI)
T40	4000K (min 80 CRI)
TRD	Red
TGN	Green
TBL	Blue

C SPECIFY CCT/COLOR (INSIDE)

S30	3000K (min 80 CRI)
S35	3500K (min 80 CRI)
S40	4000K (min 80 CRI)
SRD	Red
SGN	Green
SBL	Blue

D SPECIFY SUSPENSION

S1	Vertical, Remote Driver
S3	Vertical, Integral Driver (available up to 1219mm/48" sq only)
S5	Integral Driver (available up to 1219mm/48" sq only)

E SPECIFY FINISH


BL	Black
MS	Silver Metallic
WH	White
Z1	Wood Grain - Light Cherry
Z2	Wood Grain - Dark Walnut

EXAMPLE CODE


982005/T35/S35/S1/WH

DIMENSIONAL DIAGRAMS


SI VERTICAL - REMOTE DRIVER

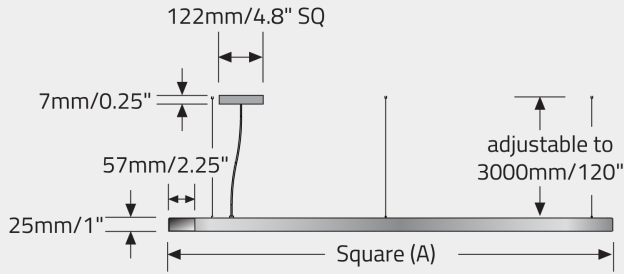

S3 VERTICAL - INTEGRAL DRIVER

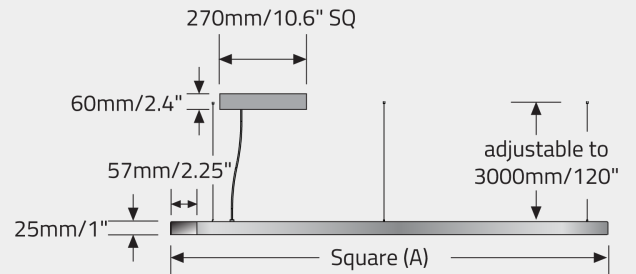

S5 - INTEGRAL DRIVER

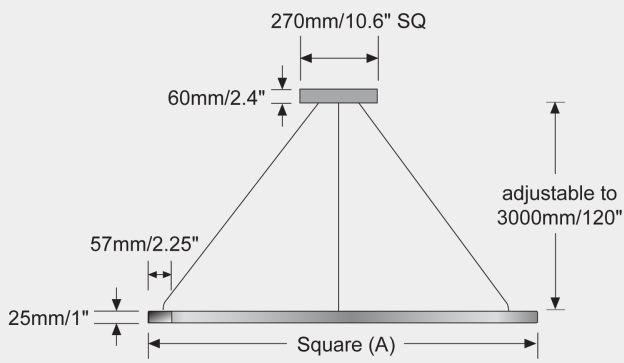

APPROVALS



DAMP
LOCATION



IP20