



GENERAL SPECIFICATION

Body and trim: Steel and aluminum.

Finish: Back plate, powder coated gloss white. Trim, painted or plated as listed.

Diffuser: Three ply satin opal glass.

Drivers: HPF electronic, 120/277V (EU-240V). 0-10V, 1% dimming standard.

Luminaire orientation: Ceiling or wall mounted.

Mechanical: Mounts directly to a junction box (by others - North America only).


Delivered Lumens: Delivered lumens & LPW based on 3000K (min 80 CRI).

Approvals: Damp Location (Indoor use only).

MOUNTING & OPTICS



Ceiling Direct/Indirect



63 8818

HOW TO ORDER

A SPECIFY LUMINAIRE

Code	Power (LED)	Delivered lms	LPW	Weight
63 8818	21W	1240	59	6.3Kg/14lb

B SPECIFY CCT

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)

C SPECIFY FINISH

WH	White
MB	Metallic Bronze
MS	Silver Metallic
PC	Polished Chrome
SC	Satin Chrome
SN	Satin Nickel
OT	Other painted finish (RAL number required)
F40	Other Non-RAL painted finish (sample chip required)


Additional Information

OT & BL1 have a one time set-up charge regardless of quantity.

EXAMPLE CODE

638818/35/MS

DIMENSIONAL DIAGRAMS

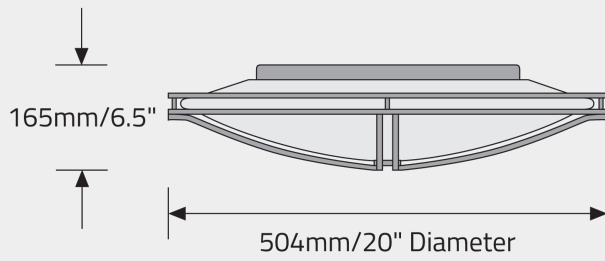

APPROVALS



DAMP
LOCATION



IP20