



GENERAL SPECIFICATION

Body and trim: Steel and aluminum.

Finish: Back plate, powder coated gloss white. Trim, powder coated or plated as listed.

Diffusers: Opal or faux alabaster acrylic.

Drivers: HPF electronic, 120-277V (EU-240V). 0-10V, 1% dimming


Luminaire orientation: Ceiling mounted.

Mechanical: Mounts directly to a junction box (by others - North America only).


Delivered Lumens: Delivered lumens & LPW based on 4000K (min 80 CRI).

Approvals: Damp Location (Indoor use only).


MOUNTING & OPTICS




Ceiling



60 6001



60 6011



60 6014

HOW TO ORDER

A SPECIFY LUMINAIRE

Code	Power (LED)	Delivered lms	LPW	Diameter (A)	Weight
60 6001	28W	1715	63	18" (457mm)	8.1lb (3.7kg)
60 6011	28W	1978	71	24" (610mm)	9.9lb (4.5kg)
60 6014	36W (36W)	2616 (2616)	72	24" (610mm)	9.9lb (4.5kg)

B SPECIFY CCT

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)

C SPECIFY DIFFUSER

OP	Opal Acrylic
FB	Beige Faux Alabaster
FW	White Faux Alabaster

D SPECIFY FINISH

MB	Metallic Bronze
MS	Silver Metallic
AB	Antique Brass
PB	Polished Brass
SB	Satin Brass
SC	Satin Chrome
SN	Satin Nickel
OT	Other painted finish (RAL number required)
F40	Other Non-RAL painted finish (sample chip required)


Additional Information

OT & BL1 have a one time set-up charge regardless of quantity.

EXAMPLE CODE

606001/35/OP/PB

DIMENSIONAL DIAGRAMS

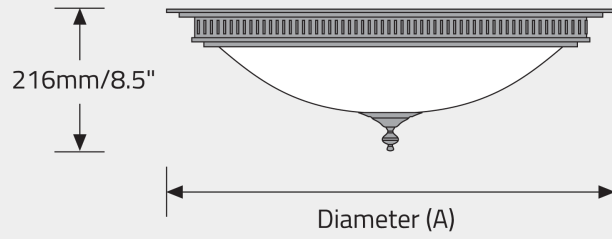

APPROVALS



DAMP
LOCATION



IP20