

GENERAL SPECIFICATION

Cover: Stainless steel.

Main body: Steel and cast aluminium. Body retained by stainless steel screws.

Finish: Various as listed.

Diffuser: Opal acrylic.


Drivers: HPF, electronic, 120/277V (EU-240V), 0-10V, 10% dimming standard.

Minimum Starting Temperature: -25°C.


Remote Emergency: Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Delivered Lumens: Delivered lumens & LPW based on 3000K (min 80 CRI).


MOUNTING & OPTICS




Ext-Wall Front/Back




31 2163




31 2211



31 2213



31 2215



31 2217

HOW TO ORDER

A SPECIFY LUMINAIRE

Code	Power (LED)	Delivered lms	LPW	Height (A)	Width (B)
31 2163	16W	504	32	17" (432mm)	11" (279mm)
31 2211	16W	1074	70	26" (660mm)	12" (305mm)
31 2213	28W	1872	69	26" (660mm)	12" (305mm)
31 2215	28W	1782	65	50" (1270mm)	12" (305mm)
31 2217	56W	3508	64	50" (1270mm)	12" (305mm)

B SPECIFY CCT

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)

C SPECIFY FINISH

BL	Black
MB	Metallic Bronze
MS	Silver Metallic
SS	Stainless Steel

Additional Information

OT & BL1 have a one time set-up charge regardless of quantity.

D SPECIFY OPTIONS

RE	Remote Emergency System (max distance 25ft, 120/277V)
----	---


Additional Information

Dimming is not available when using RE (Remote Emergency)

EXAMPLE CODE

312163/35/MS

DIMENSIONAL DIAGRAMS

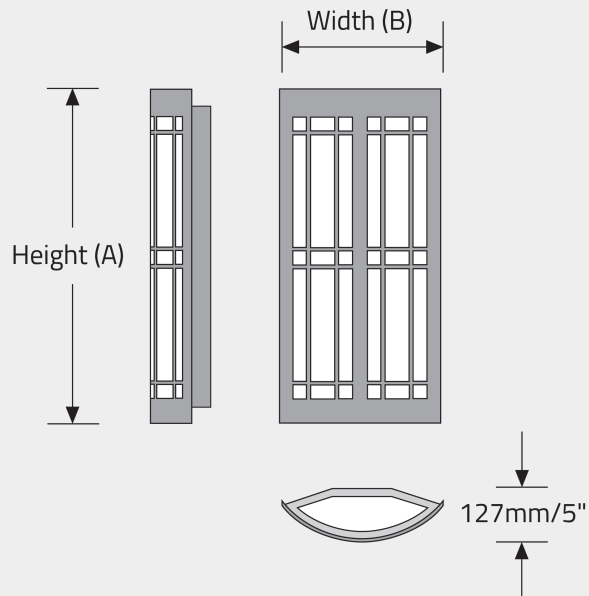

APPROVALS



IP65

