



## GENERAL SPECIFICATION

**Housing:** Die-cast aluminum.

**External Screws:** Stainless steel.

**Lens:** 6mm/0.25" tempered glass.

**Gaskets:** One piece silicone.

**Finish:** Silver powder coated RAL9006 or black powder coated.

**Drivers:** HPF, electronic for 120-277V (EU-240V).

**Minimum Starting Temperature:** -30°C for LEDs.


**Conduit entry:** PG11 gland for 11mm/0.625" DIA cable.

**Delivered Lumens:** Delivered lumens and LPW based on 3000K (min 80 CRI).


## MOUNTING & OPTICS



Ext-Ceiling/Canopy



81 0348- 14W-40 DEG



81 0347-14W-8 DEG

## HOW TO ORDER

### A SPECIFY L

| Code           | Power (LED) | Beam | Delivered lms |
|----------------|-------------|------|---------------|
| <b>81 0347</b> | 14W         | 8°   | 1049          |
| <b>81 0348</b> | 14W         | 40°  | 1049          |

### B SPECIFY CCT

|           |                    |
|-----------|--------------------|
| <b>30</b> | 3000K (min 80 CRI) |
| <b>40</b> | 4000K (min 80 CRI) |

### C SPECIFY FINISH

|           |               |
|-----------|---------------|
| <b>BL</b> | Black         |
| <b>GR</b> | Gray RAL 9006 |


### D SPECIFY DIMMING

|           |                      |
|-----------|----------------------|
| <b>DB</b> | Dimming (0-10V, 10%) |
|-----------|----------------------|

### EXAMPLE CODE

810347/30/BL

## DIMENSIONAL DIAGRAMS

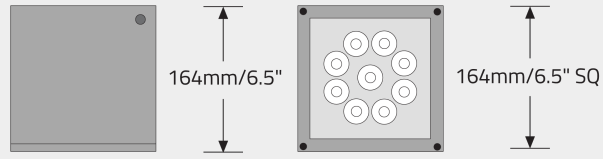

## APPROVALS

