



GENERAL SPECIFICATION

Body: Aluminum.

Finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Drivers: HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

Remote Mounting Of Drivers: Wire size 18 AWG - max distance (from fixture to drivers) 40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.

Mechanical: Luminaires mount directly over J box (by others - North America only).

Diffusers: Frosted Polycarbonate.


L70 @25deg C: > 50,000 hrs.

Delivered Lumens: Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.


MOUNTING & OPTICS




Suspended Direct




Suspended
Direct/Indirect




98 3105




98 3110




98 3120




98 3130




98 3140




98 3005




98 3010




98 3020



98 3030



98 3040



98 3040

HOW TO ORDER

A SPECIFY LUMINAIRE

Code	Size (A)	Light Direction	Power (LED)	Delivered lms	LPW
98 3005	24" (610mm)	Direct	26W	3131	120
98 3010	35" (889mm)	Direct	39W	4689	120
98 3020	46" (1168mm)	Direct	51W	6225	122
98 3030	62" (1575mm)	Direct	70W	8574	122
98 3040	73" (1854mm)	Direct	83W	10102	122
98 3105	24" (610mm)	Direct/Indirect	52W	6467	124
98 3110	35" (889mm)	Direct/Indirect	77W	9685	126
98 3120	46" (1168mm)	Direct/Indirect	102W	12858	126
98 3130	62" (1575mm)	Direct/Indirect	141W	17709	126
98 3140	73" (1854mm)	Direct/Indirect	166W	20866	126

B SPECIFY CCT/COLOR (DIRECT)

D30	3000K (min 80 CRI)
D35	3500K (min 80 CRI)
D40	4000K (min 80 CRI)
DRD	Red
DGN	Green
DBL	Blue

C SPECIFY CCT/COLOR (INDIRECT)

N30	3000K (min 80 CRI)
N35	3500K (min 80 CRI)
N40	4000K (min 80 CRI)
NRD	Red
NGN	Green
NBL	Blue

D SPECIFY SUSPENSION

S1	Vertical, Remote Driver
S3	Vertical, Integral Driver
S5	Integral Driver

E SPECIFY FINISH


BL	Black
MS	Silver Metallic
WH	White
Z1	Wood Grain - Light Cherry
Z2	Wood Grain - Dark Walnut

EXAMPLE CODE


983105/D35/N35/S1/WH

DIMENSIONAL DIAGRAMS

SI VERTICAL - REMOTE DRIVER

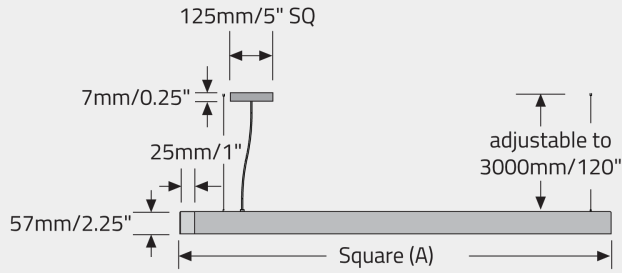


S3 VERTICAL - INTEGRAL DRIVER

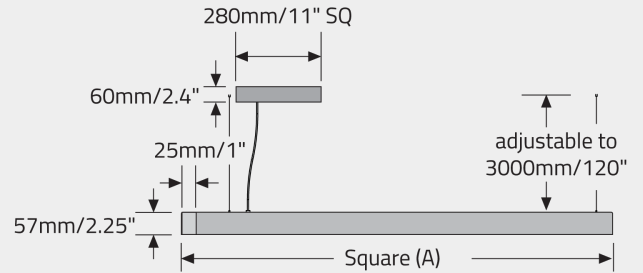

Direct/Indirect: Available upto 1168mm/46" sq only.

S5 - INTEGRAL DRIVER

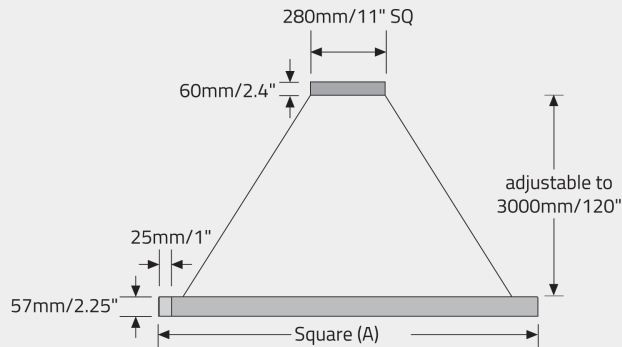

Direct/Indirect: Available upto 1168mm/46" sq only.

APPROVALS



DAMP
LOCATION



IP20