



Project Name:

Fixture Type:

Fixture Code:

Quantities:

A. LIMINAIRE**271000** A Type, Direct, 2665 lms**271002** B Type, Direct, 3031 lms**271004** C Type, Direct, 3592 lms**271010** A Type, Direct/Indirect, 5954 lms**271020** B Type, Direct/Indirect, 6298 lms**271040** C Type, Direct/Indirect, 6854 lms

Recommended minimum suspension length for direct/indirect version: 12" for White LEDs, 24" for Colored LEDs

B. CCT (DIRECT)**D30** 3000K (min 80 CRI)**D35** 3500K (min 80 CRI)**D40** 4000K (min 80 CRI)**C. CCT/COLOR (INDIRECT)****N30** 3000K (min 80 CRI)**N35** 3500K (min 80 CRI)**N40** 4000K (min 80 CRI)**NRD** Red**NGN** Green**NBL** Blue**D. OPTIONS****EM** Integral Emergency**E. OPTIONAL LOW VOLTAGE****EV** Low Voltage



To be used with DE only.

F. OPTIONAL DIMMING**DE** PoE



DE must be used with EV only.

DIMENSIONAL DIAGRAMS



Type A pattern

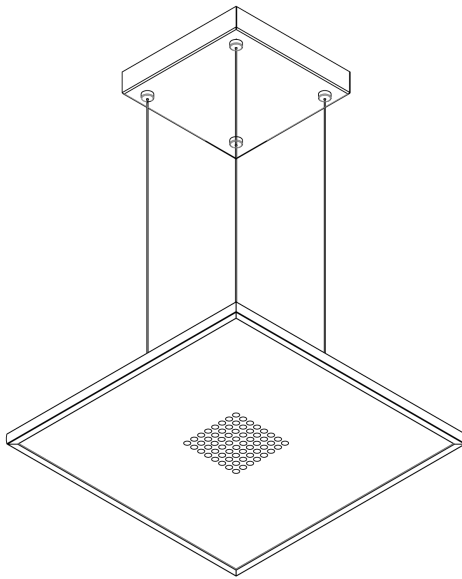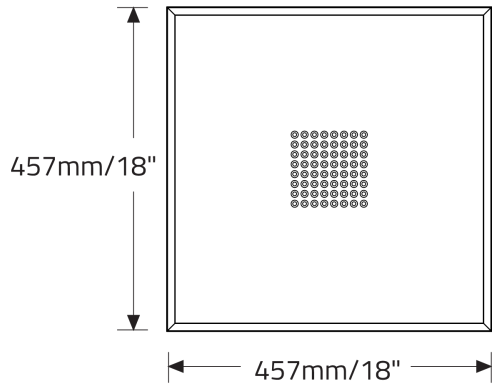

Type B pattern

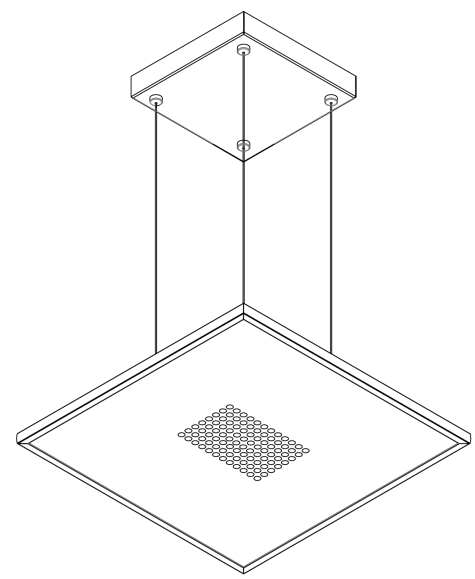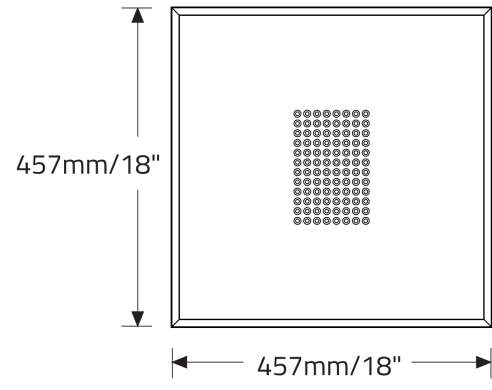


Type C pattern

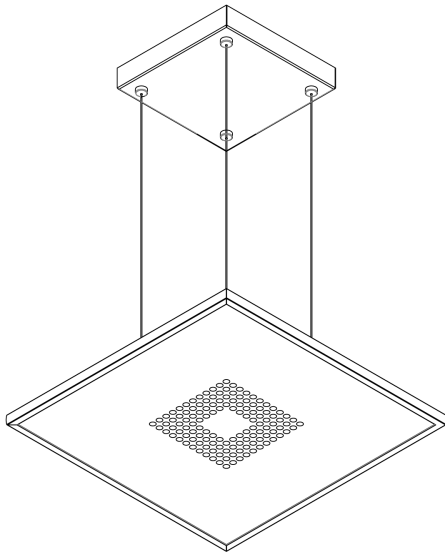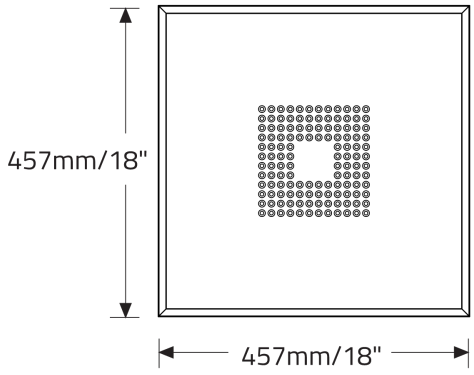


ISO VIEW


Direct only - Type A

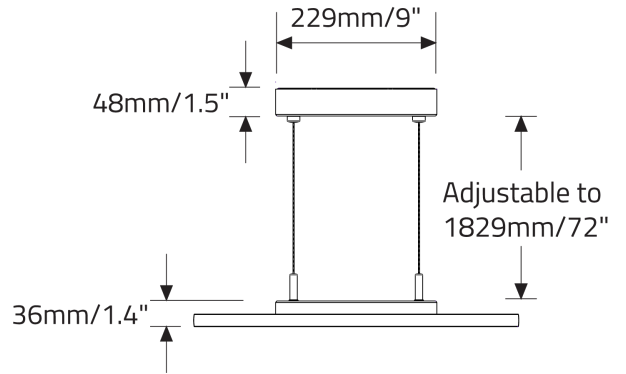



Direct only - Type B

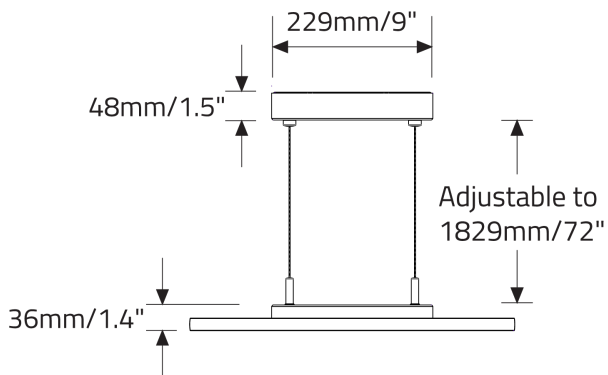

Direct only - Type C


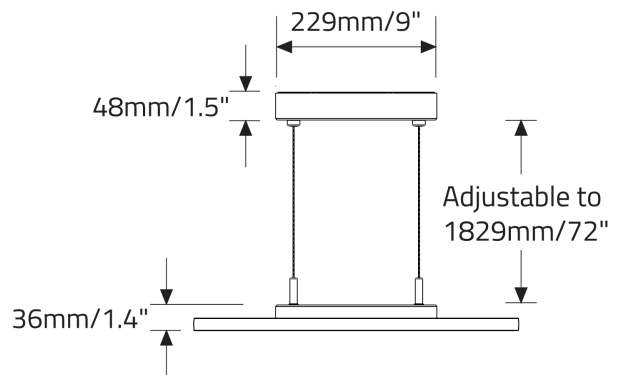


Direct/Indirect - Type A

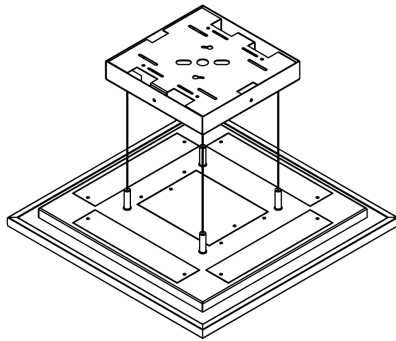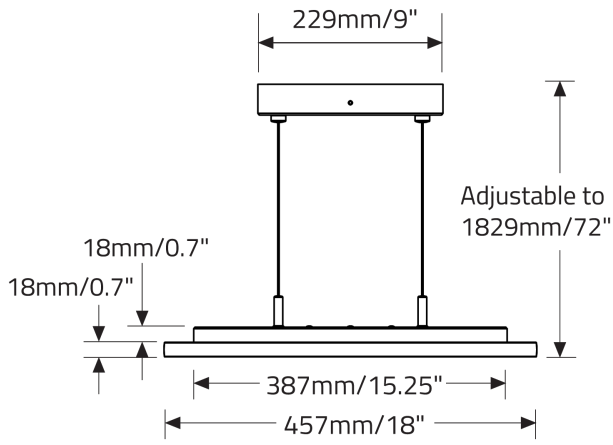



Uplight - ISO VIEW

Direct/Indirect - Type B

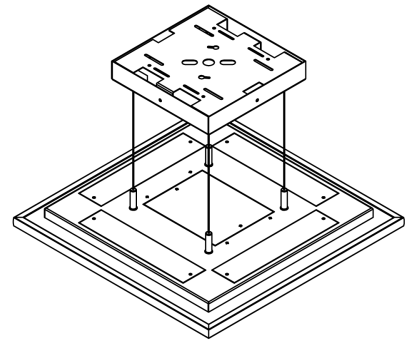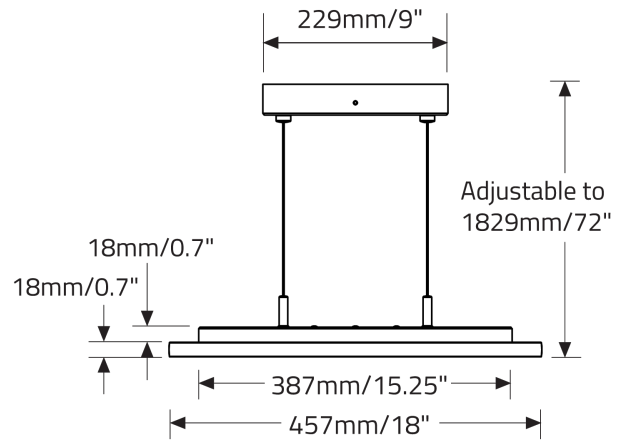

Uplight - ISO VIEW

Direct/Indirect - Type C

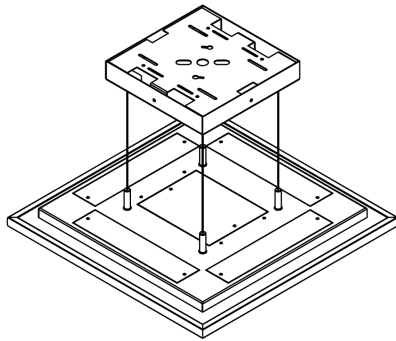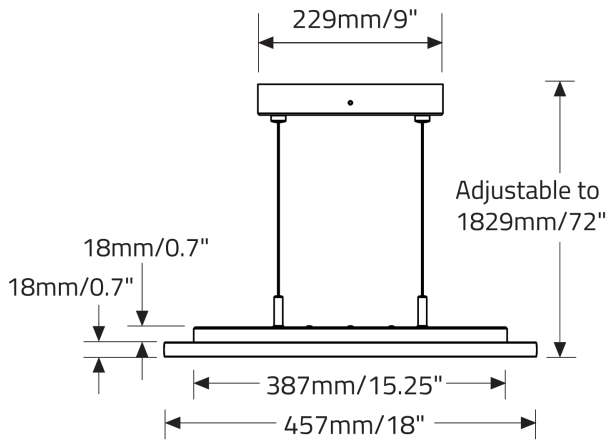

Uplight - ISO VIEW