

XACARA CL™ - CEILING SURFACE

Project Name:	Fixture Type:
Fixture Code:	Quantities:




XACARA CL™ - CEILING SURFACE

GENERAL SPECIFICATION

Body Die cast aluminum.	Finish Powder coated.
Reflectors Aluminum, specular finish with multiple facets.	Mounting Mounts directly to a junction box (by others).
Protective lens Clear glass.	Driver HPF electronic, 120/277V (EU-240V) with 0-10V dimming (1%).
L70 @25°C (77°F) > 50,000 hrs.	Delivered Lumens Delivered lumens & LPW based on 3000K (min 80 CRI).
Approvals Damp Location (Indoor use only).	Note <i>Photometric testing performed using LM79 procedures.</i>

MOUNTING & OPTICS

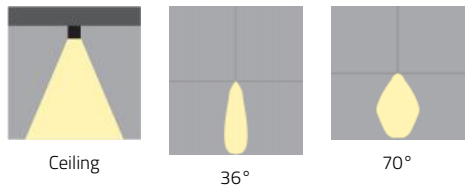

XACARA CL™ - CEILING SURFACE

HOW TO ORDER

A. LUMINAIRE

501020 1 x 15W, 1143 lms **501022** 1 x 26W, 2085 lms

B. CCT/CRI

30A 3000K (min 80 CRI) **30B** 3000K (min 90 CRI) **35A** 3500K (min 80 CRI) **35B** 3500K (min 90 CRI)
40A 4000K (min 80 CRI) **40B** 4000K (min 90 CRI)

C. REFLECTOR

ME Medium 36° **XW** Extra wide 70°

D. FINISH

BL Black **MS** Silver Metallic **WH** White

E. OPTIONS

D2 0-10V Dimming (0.1%) **DL** DALI dimming 1% **DA** DALI dimming 0.1% **L1** Lutron L3DA3W Hi lume 1%
L3 Lutron L3DAE Hi lume 1% EcoSystem

XACARA CL™ - CEILING SURFACE

TECHNICAL DATA

LUMINAIRE

Code	501020	501022
Power (LED)	1 x 15W	1 x 26W
Delivered lms	1143	2085
LPW	76	80

APPROVALS



XACARA CL™ - CEILING SURFACE

DIMENSIONAL DIAGRAMS

