

# XACARA CL-R™ - GENERAL ILLUMINATION

Project Name:	Fixture Type:
Fixture Code:	Quantities:



## XACARA CL-R™ - GENERAL ILLUMINATION



# XACARA CL-R™ - GENERAL ILLUMINATION

The raw design delivers primal functionality in light performance and to interior aesthetics. The driver is installed in the junction box which maintains the shallow visible depth of 2.3", making **XACARA** a practical substitute for recessed downlights. Available in beam angles 36° and 70° for general illumination.

## GENERAL SPECIFICATION

### Housing

Die cast aluminium.

### Protective lens

Clear glass.

### Drivers

HPF electronic for 120-277V (EU-240V). 0-10V dimming (10%).

### L70 @25°C (77°F)

> 60,000 hrs.

### Approvals

Damp Location (Indoor use only).

### Reflectors

Medium and wide beam. Highly reflective, specular finish, vacuum plated.

### Finish

Powder coated, as specified.

### Mounting

Luminaire mounts to a Jbox (not included, installed by others). Driver mounts to the inside of the Jbox (by others). Mounting hardware included.


### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

### Note

*Photometric testing performed using LM79 procedures.*

## MOUNTING & OPTICS

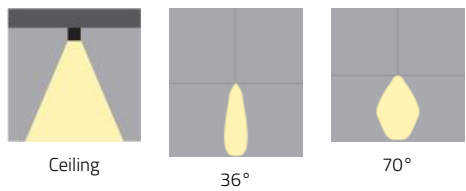

# XACARA CL-R™ - GENERAL ILLUMINATION

## HOW TO ORDER

### A. LUMINAIRE

**501012** 26W, 2085 lms

### B. CCT/CRI

<b>30A</b> 3000K (min 80 CRI)	<b>30B</b> 3000K (min 90 CRI)	<b>35A</b> 3500K (min 80 CRI)	<b>35B</b> 3500K (min 90 CRI)
<b>40A</b> 4000K (min 80 CRI)	<b>40B</b> 4000K (min 90 CRI)		

### C. REFLECTORS

**ME** Medium 36°

### D. FINISH

<b>WH</b> White	<b>BL</b> Black Metallic Textured	<b>MS</b> Silver Metallic Textured
-----------------	-----------------------------------	------------------------------------

## TECHNICAL DATA

### LUMINAIRE

Code	<b>501012</b>
Power (LED)	26W
Delivered lms	2085
LPW	80

### FINISH



## APPROVALS



XACARA CL-R™ - GENERAL ILLUMINATION

DIMENSIONAL DIAGRAMS

