



WRAP SL™ - MODERN CLASSICS EXTERIOR

| | |
|---------------|---------------|
| Project Name: | Fixture Type: |
| Fixture Code: | Quantities: |

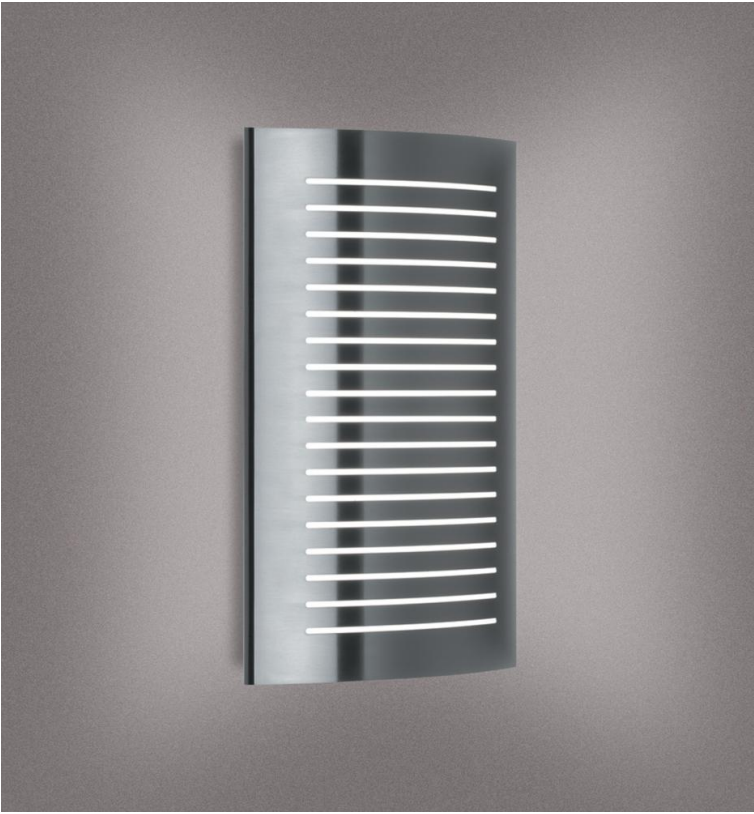

WRAP SL™ - MODERN CLASSICS EXTERIOR

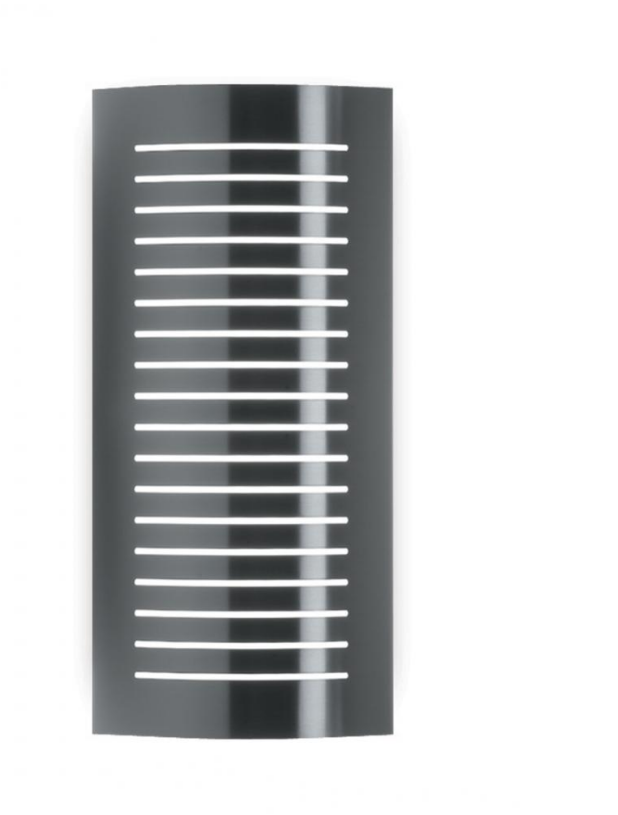

WRAP SL™ - MODERN CLASSICS EXTERIOR

A facade light with a curved stainless steel grill adds an accent ideal for modern architecture. The grill subdues the light from the front angle and functions as a decorative accent, while light emits from all lateral sides of the luminaire, providing general illumination for the immediate area. Alternative finishes include Black, Bronze Metallic, and Silver Metallic.

GENERAL SPECIFICATION

Cover

Stainless steel.

Finish

Various as listed.

Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Main body

Steel and cast aluminium. Body retained by stainless steel screws.

Diffuser

Opal acrylic.


Drivers

HPF, electronic, 120/277V (EU-240V), 0-10V, equal to or less than 10% dimming standard.

Minimum Starting Temperature

-25°C.

MOUNTING & OPTICS



Ext-Wall Front/Back

General Diffuse

WRAP SL™ - MODERN CLASSICS EXTERIOR

HOW TO ORDER

A. LUMINAIRE

| | | | |
|---|--|---|---|
| 312153 17" Height, 16W, 243 lms | 312221 26" Height, 16W, 731 lms | 312223 26" Height, 28W, 1274 lms | 312225 50" Height, 28W, 1064 lms |
| 312227 50" Height, 56W, 2110 lms | | | |

B. CCT

| | | |
|------------------------------|------------------------------|------------------------------|
| 30 3000K (min 80 CRI) | 35 3500K (min 80 CRI) | 40 4000K (min 80 CRI) |
|------------------------------|------------------------------|------------------------------|

C. FINISH

| | | | |
|-----------------------------------|------------------------------------|------------------------------------|---------------------------|
| BL Black Metallic Textured | MS Silver Metallic Textured | BM Bronze Metallic Textured | SS Stainless Steel |
|-----------------------------------|------------------------------------|------------------------------------|---------------------------|

D. OPTIONS

RE Remote Emergency System (max distance 25ft, 120/277V)


Dimming is not available when using RE (Remote Emergency)

TECHNICAL DATA

LUMINAIRE

| Code | 312153 | 312221 | 312223 | 312225 | 312227 |
|---------------|--------|--------|--------|--------|--------|
| Power (LED) | 16W | 16W | 28W | 28W | 56W |
| Delivered lms | 243 | 731 | 1274 | 1064 | 2110 |
| LPW | 16 | 48 | 47 | 39 | 39 |
| Height (A) | 17" | 26" | 26" | 50" | 50" |
| Width (B) | 11" | 12" | 12" | 12" | 12" |

FINISH

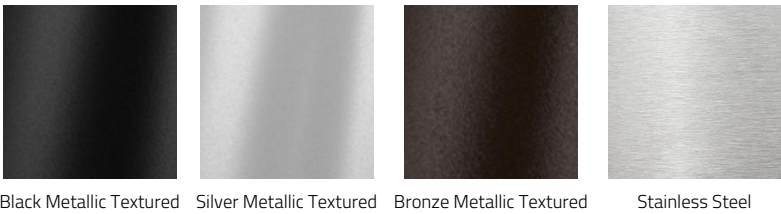

APPROVALS



WRAP SL™ - MODERN CLASSICS EXTERIOR

DIMENSIONAL DIAGRAMS

