

INSIDE/OUTSIDE



GENERAL SPECIFICATION

Body: Aluminum.

Finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Drivers: HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

Remote Mounting Of Drivers: Wire size 18 AWG - max distance (from fixture to drivers) 40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.


Mechanical: Luminaires attached directly to the J box (by others - North America only).

Diffusers: Frosted Polycarbonate.


L70 @25deg C: > 50,000 hrs.

Delivered Lumens: Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.


MOUNTING & OPTICS




Suspended
Inside/Outside




98 2005




98 2010



98 2020



98 2030



98 2040

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Size:	Power (LED):	Delivered lms:	LPW:
98 2005	610mm/24"	53W	4157	78
98 2010	914mm/36"	80W	6256	78
98 2020	1219mm/48"	110W	8587	78
98 2030	1524mm/60"	134W	10606	79
98 2040	1854mm/73"	165W	13105	79

B SPECIFY CCT/COLOR (OUTSIDE)

T30	3000K (min 80 CR)
T35	3500K (min 80 CR)
T40	4000K (min 80 CR)
TRD	Red
TGN	Green
TBL	Blue

C SPECIFY CCT/COLOR (INSIDE)

S30	3000K (min 80 CR)
S35	3500K (min 80 CR)
S40	4000K (min 80 CR)
SRD	Red
SGN	Green
SBL	Blue

D SPECIFY SUSPENSION

S1	Vertical, Remote Driver
S3	Vertical, Integral Driver (available up to 1219mm/48" sq only)
S5	Integral Driver (available up to 1219mm/48" sq only)

E SPECIFY FINISH


BL	Black
MS	Metallic Silver
WH	White
Z1	Wood Grain - Light Cherry
Z2	Wood Grain - Dark Walnut

EXAMPLE SPECIFICATION CODE


982005/T35/S35/S1/WH

DIMENSIONAL DIAGRAMS


S1 VERTICAL - REMOTE DRIVER

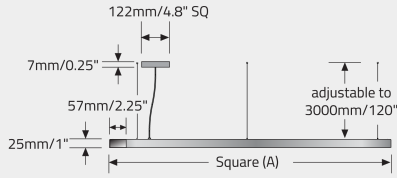

S3 VERTICAL - INTEGRAL DRIVER

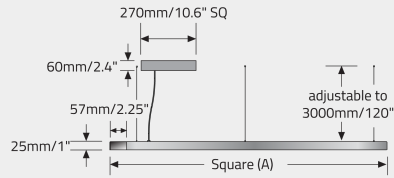

S5 - INTEGRAL DRIVER

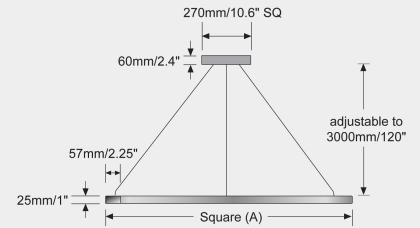

APPROVALS



DAMP
LOCATION



IP20