




BOOK™

SHORT SPECIFICATION SHEET

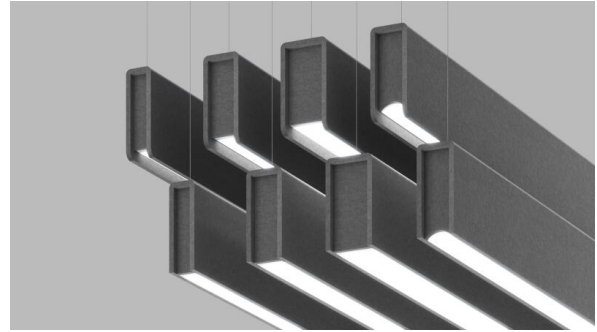

Fixture Type

Fixture Code

Quantities

1 HOW TO ORDER

1. LUMINAIRE TYPE

BKFP Pendant

2. ILLUMINATED OR NON-ILLUMINATED

LTD1 Illuminated

LTD2 Non-Illuminated

3. STYLE

STT1 Flush (FL)

STT2 Regressed (RG)

STT3 Curved Flush (FL) ¹

STT4 Curved Regressed (RG) ¹

¹ Available in the 2.5" illuminated version only.

4. DIRECTION

DT0 Not required

DT1 Direct

DT2 Direct/Indirect

DT3 Indirect

One power cord for every 50 linear ft.

5. APERTURE

PW01 1.5"

PW02 2.5"

PW03 3.5"

6. RUN TYPE

TR01 Straight

¹ Consult factory if L shape, U shape, or Quad is required with Wall mount.

* There is one power cable for a max overall length is 50ft, beyond that extra power cables are required. Consult factory.

7. LENGTH - A

The minimum length to order is 2ft and orders are to be in 2ft increments.

Examples:

4ft = SFA0400

10ft = SFA1000

50ft = SFA5000

SFA_ _ _ _

The minimum length to order is 2ft and orders are to be in 2ft increments.

Examples:

4ft = SFA0400

10ft = SFA1000

50ft = SFA5000

8. MAX LENGTH PER SECTION

SL02 2ft ¹

SL04 4ft

SL06 6ft

SL08 8ft

SL10 10ft

SL12 12ft

¹ The dimming curves on the 2ft section length (SL02) will differ from the other sizes.

* You can select your preferred maximum length per section to account for specific parameters and constraints, such as transportation methods and building limitations. However, we may default to a more optimized combination. For example, if a 40ft run is required and your selected maximum length is 12ft, we would supply four 10ft segments to achieve a balanced placement of suspension cables.

Download the Linear Length Configurations document to see our standard combinations. For special requirements, contact sales@betacalco.com.

9. LM/FT (DIRECT)

LPF000 Not required

LPF020 200 lm/ft

LPF040 400 lm/ft

LPF060 600 lm/ft

LPF080 800 lm/ft

LPF100 1000 lm/ft

LPF120 1200 lm/ft

LPF140 1400 lm/ft

10. LM/FT (INDIRECT)

LPG000 Not required

LPG020 200 lm/ft

LPG040 400 lm/ft

LPG060 600 lm/ft

LPG080 800 lm/ft

LPG100 1000 lm/ft

LPG120 1200 lm/ft

11. CRI

CR00 Not required **CR80** CR 80+ **CR90** CRI 90+

12. CCT DIRECT

CTA00 Not required **CTA27** 2700K **CTA30** 3000K **CTA35** 3500K
CTA40 4000K

¹ Longer lead times may apply; consult the factory.

* Tunable White and RGBW available; consult the factory.

13. CCT INDIRECT

CTB00 Not required **CTB27** 2700K **CTB30** 3000K **CTB35** 3500K
CTB40 4000K

* Tunable White and RGBW available, consult factory.

14. DIRECT DIFFUSER

DD0 Not required **DD2** Batwing ⁴ **DD3** Diffused ⁵ **DD4** Comfort ⁶
DS3 Diffused - Seamless ^{2 5}

² The seamless lens is supplied with a max length of 100ft. Longer fixtures will have at least one seam.

⁴ Only available with Curved Flushed style.

⁵ Only available with Flushed and Regressed styles.

⁶ Only available with Curved Flushed and Curved Regressed styles.

15. UPLIGHT DIFFUSER

UD0 Not required **UD1** Batwing **UD2** Diffused ¹ **UD3** Asymmetric ^{1 2}

¹ Available up to 1000 lm/ft.

² The asymmetric distribution will be directed away from the wall.

16. VOLTAGE

V0 Not required	V1 120/277V	V2 240V ¹	V3 347V ²
V4 Low Voltage ³			

¹ Not available in North America.

² Only available with 0-10V Dimming 1.0% (DA01).

³ Only available with PoE (DA45).

17. DIMMING

DA00 Not required	DA01 0-10V Dimming 1.0%	DA02 0-10V Dimming 0.1% ¹	DA20 DALI Dimming 0.1% ¹
DA21 DALI Dimming 1.0% ¹	DA30 DSL/switchDim ²	DA45 PoE ³	

¹ Not available with 347V (V3).

² Not available in North America.

³ Only available with Low Voltage (V4).

18. CEILING TYPE

G1 Grid ceiling ¹	H1 Hard ceiling ²
-------------------------------------	-------------------------------------

The cost for the canopies, power cables, connections mechanisms and endcaps for the fixture has been added to these items.

¹ Combo kit provided includes installation to T-bar and through tile mount.

² Designed for drywall ceilings.

19. SUSPENSION

HLA03 3ft cable suspension	HLA06 6ft cable suspension	HLA09 9ft cable suspension
-----------------------------------	-----------------------------------	-----------------------------------

* Note: Special order available on lengths over 13ft and may be subject to longer lead times, consult factory.

20. ACOUSTIC PANEL COLOR

AP02 Citrus	AP04 White	AP08 Red Coffee	AP11 Light Gray
AP13 Apple Green	AP22 Blue	AP26 Sesame Gray	AP27 Black
AP47 Navy Peony	AP60 Pure Red	AP73 Cloudburst	AP89 Douglas Fir
APW01 Oak			

For accompanying non-illuminating acoustic panels, see our Acoustic Circles, Quads, Triangles, and Ellipse spec pages.

Contact factory for additional colors.

21. CANOPY FINISH

CF00 Not required	CF01 White - Textured	CF02 Black Metallic - Textured	CF20 Silver Metallic - Textured
CF25 Gold Metallic - Textured	CF44 Midnight Blue Metallic - Textured	CF45 Copper Metallic	CF46 Charcoal Metallic - Textured
CF47 Bronze Metallic - Textured	CF52 Champagne Metallic	CF53 Red Metallic - Textured	

22. EMERGENCY

E0 Not required	E1 Emergency system - Integral ¹	E3 Emergency generated circuit - Remote ¹
------------------------	--	---

¹ Specify quantity of emergency sections or emergency generator circuits required based off total length of run. ¹ Available upon request, consult factory for details. Not available with 347V.

Note: a drawing will be required at time of ordering to determine the required location of the emergency sections or generator circuits.

23. CIRCUITS

CS0 Not required	CS1 Single circuit	CS2 Dual circuit
-------------------------	---------------------------	-------------------------

24. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.