ARKO II™ - WALL

Project Name:

Fixture Type:

Fixture Code:


Quantities:





© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ARKO II™ - WALL



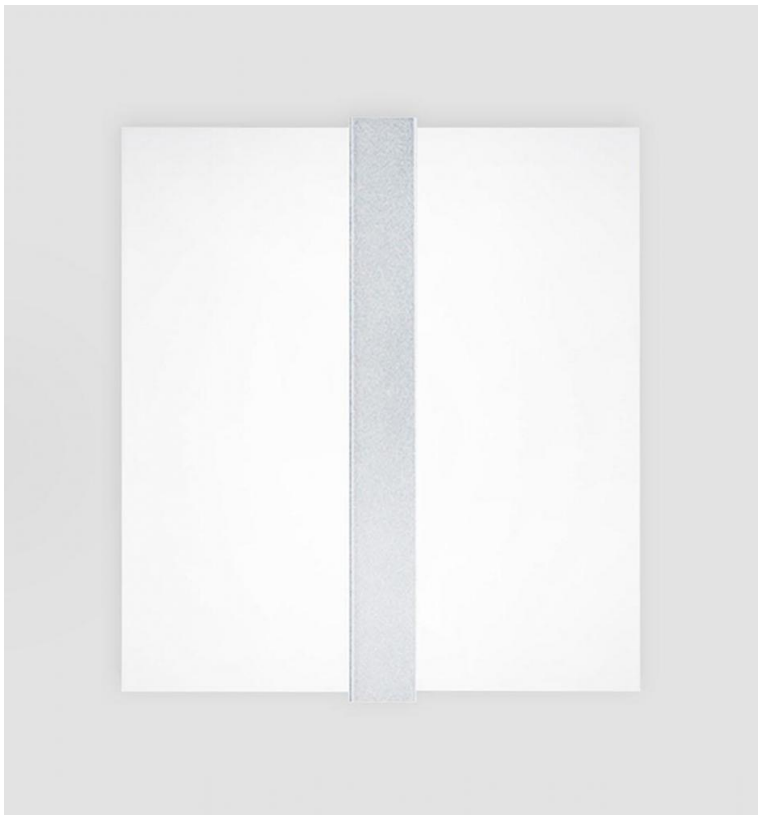

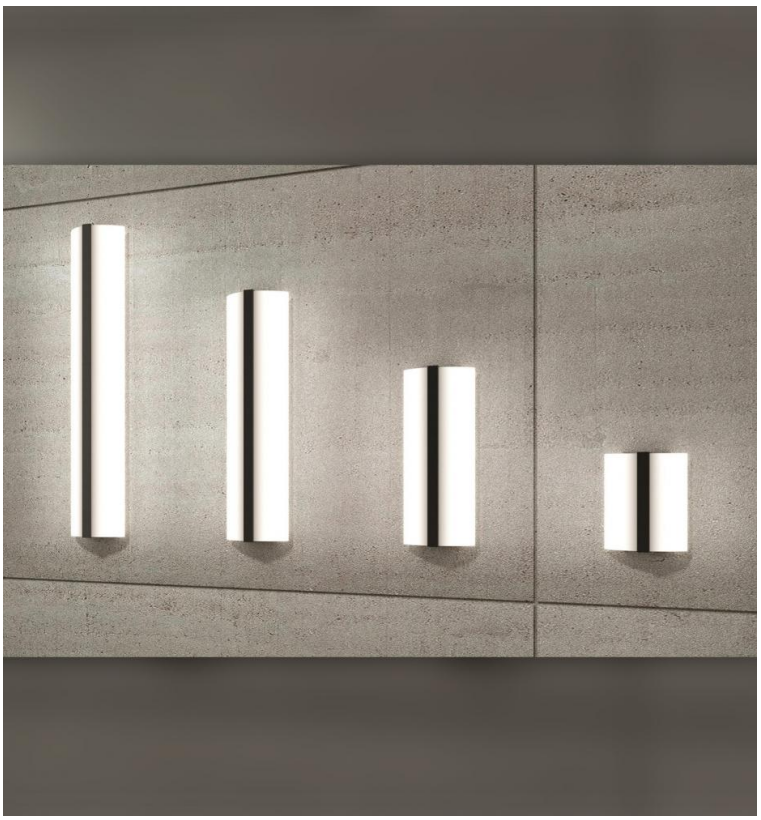

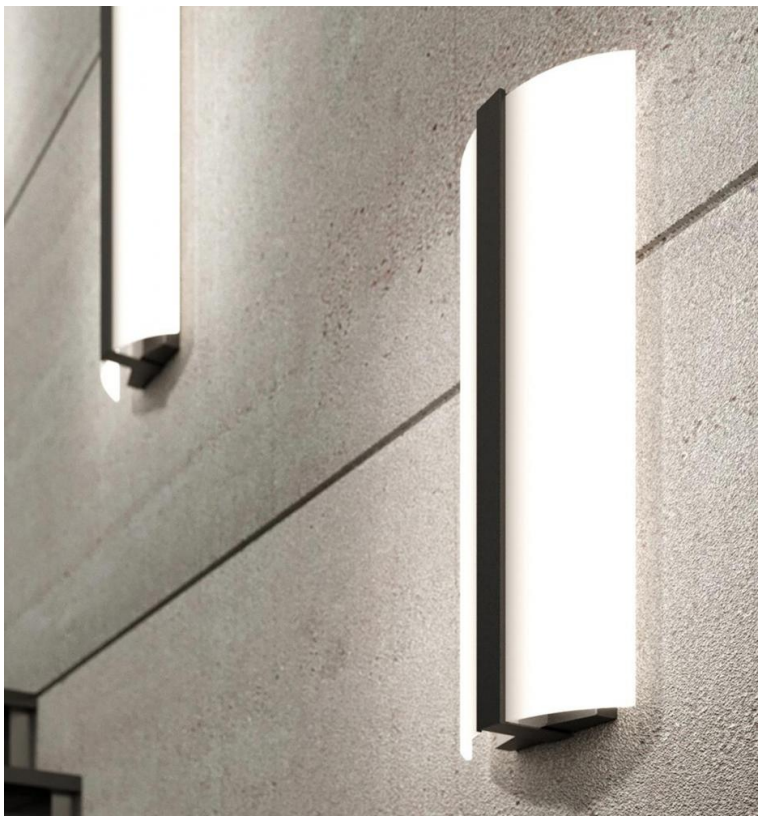

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ARKO II™ - WALL

With a curved acrylic diffuser running up to 48" in height, **ARKO II** is designed to provide general illumination while accenting tall walls. Once illuminated, the central vertical bar is silhouetted, giving the illusion of a slender minimalist frame, ideal for complementing modern architecture.

GENERAL SPECIFICATION

Body and trim
Aluminium and steel.

Diffuser
Extruded, high impact opal acrylic.

Drivers
HPF, electronic for 120-277V (EU-240V). LED 0-10V dimming standard (1%). The driver is integral to the fixture.

Sensors
Consult factory regarding sensor compatibility.

Approvals
Damp rated.


Finish
Powder coated.

Luminaire orientation
Wall mounted.

Delivered Lumens
Delivered lumens & LPW based on 4000K (min 80 CRI).

Reported L70 @25°C (77°F)
> 50,000 hrs.

OPTICS & FEATURES


Wall



Declare

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ARKO II™ - WALL

HOW TO ORDER

A. LUMINAIRE

301010 12", 500 lms
301013 12", 1000 lms
301020 24", 1000 lms
301023 24", 2000 lms
301030 36", 2000 lms
301040 48", 2400 lms

B. CCT

30 3000K (min 80 CRI)
35 3500K (min 80 CRI)
40 4000K (min 80 CRI)

C. FINISH

WH White
BL Black Metallic Textured
MS Silver Metallic Textured
MB Bronze Metallic Textured

TECHNICAL DATA

LUMINAIRE

Code	301010	301013	301020	301023	301030	301040
Power (LED)	10W	20W	20W	40W	40W	48W
Delivered lms	500	1000	1000	2000	2000	2400
LPW	50	50	50	50	50	50
Height (A)	12"	12"	24"	24"	36"	48"

FINISH

White


Black Metallic Textured


Silver Metallic Textured


Bronze Metallic Textured


APPROVALS

ADA

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ARKO II™ - WALL

DIMENSIONAL DIAGRAMS

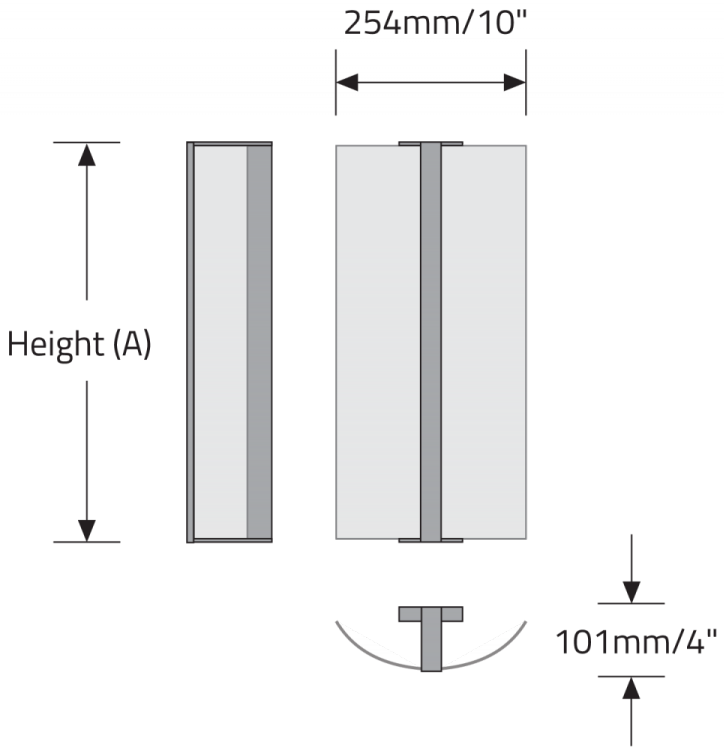

© 2026 Beta-Calco Inc. Specifications are subject to change without notice