

Project Name: Fixture Type:

Fixture Code: Quantities:

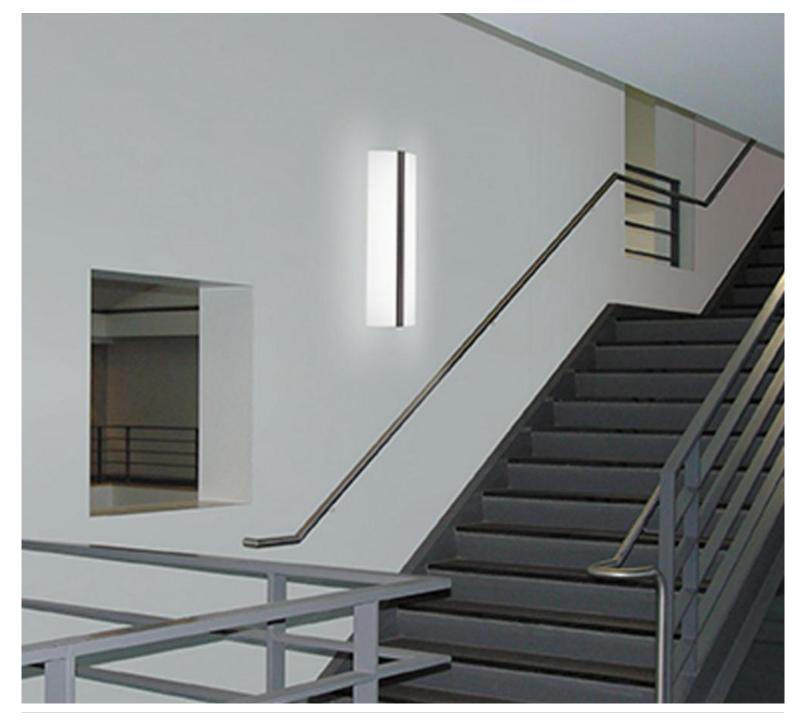

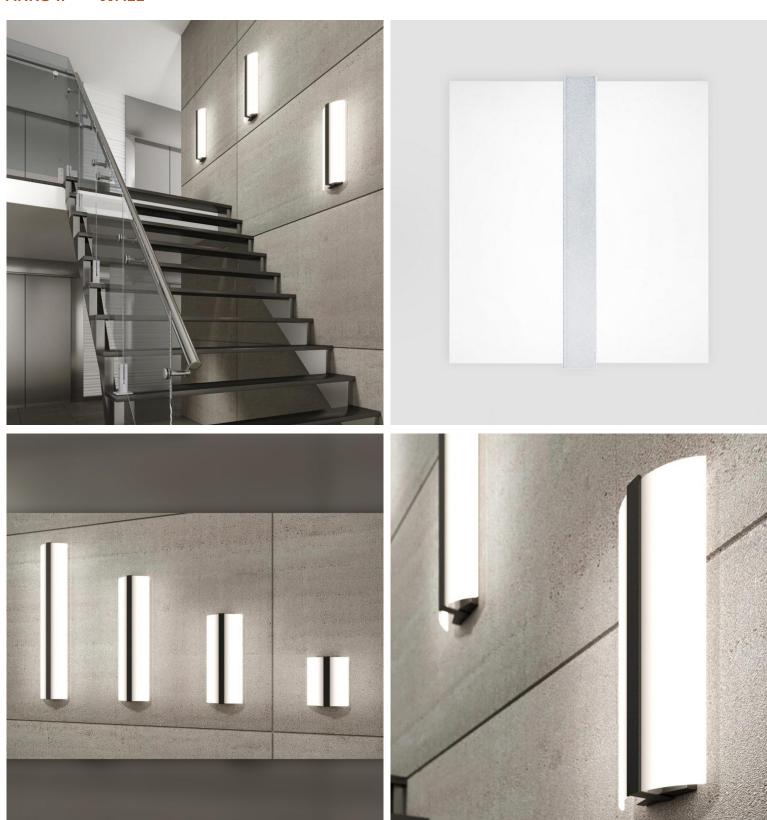

With a curved acrylic diffuser running up to 48" in height, **ARKO II** is designed to provide general illumination while accenting tall walls. Once illuminated, the central vertical bar is silhouetted, giving the illusion of a slender minimalist frame, ideal for complementing modern architecture.

GENERAL SPECIFICATION

Body and trim

Aluminium and steel.

Diffuser

Extruded, high impact opal acrylic.

Drivers

HPF, electronic for 120-277V (EU-240V). LED 0-10V dimming standard (1%). The driver is integral to the fixture.

Sensors

Consult factory regarding sensor compatibility.

Approvals

Damp rated.

OPTICS & FEATURES



Wall



Declare

Finish

Powder coated.

Luminaire orientation

Wall mounted.

Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

Reported L70 @25°C (77°F)

> 50,000 hrs.

HOW TO ORDER

A. LUMINAIRE

 12", 500 lms 12", 1000 lms 24", 1000 lms 24", 2000 lms

301030 36", 2000 lms **301040** 48", 2400 lms

B. CCT

30 3000K (min 80 CRI) 35 3500K (min 80 CRI) 40 4000K (min 80 CRI)

C. FINISH

WH White **BL** Black Metallic Textured MS Silver Metallic Textured **MB** Bronze Metallic Textured

TECHNICAL DATA

LUMINAIRE

Code	301010	301013	301020	301023	301030	301040
Power (LED)	10W	20W	20W	40W	40W	48W
Delivered Ims	500	1000	1000	2000	2000	2400
LPW	50	50	50	50	50	50
Height (A)	12"	12"	24"	24"	36"	48"

FINISH









White

Black Metallic Textured Silver Metallic Textured Bronze Metallic Textured

APPROVALS













DIMENSIONAL DIAGRAMS

