AXALIS™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

AXALIS™ - SUSPENDED

GENERAL SPECIFICATION

Body and trim
Steel and aluminum.

Power cable
Silver braided.

Diffusers
Opal acrylic with an etched finish.

Mechanical
Mounts directly over a junction box (by others - North America only).

L70 @25°C (77°F)
> 50,000 hrs.

Suspension
One stainless steel aircraft cable.

Finish
Silver anodized.

Drivers
Luminaires supplied with HPF electronic drivers, 120/277V (EU-240V). 0-10V dimming standard (10%).

Integral Emergency system
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.


Delivered Lumens
Delivered lumens and LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES


Suspended 2 sides


Suspended 3 sides


General Diffuse


Spot Only

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

AXALIS™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

436052 18", 3659 lms
436054 18", 4561 lms
436056 27", 5321 lms
436058 27", 7300 lms
436071 49", 8635 lms

B. CCT

30 3000K (min 80 CRI)
35 3500K (min 80 CRI)
40 4000K (min 80 CRI)

C. DOWNLIGHT

X1 Xacara downlight 28W LED 3000K (2587lm delivered)
X2 Xacara downlight 28W LED 3500K (2665lm delivered)
X3 Xacara downlight 28W LED 4000K (2690lm delivered)

D. EMERGENCY

EM Integral Emergency

TECHNICAL DATA

LUMINAIRE


Code	436052	436054	436056	436058	436071
Power (LED)	48W	60W	72W	96W	115W
Delivered lms	3659	4561	5321	7300	8635
LPW	78	78	76	76	75
Height (A)	18"	18"	27"	27"	49"
Height (B)	1"	1"	1"	1"	1.8"

APPROVALS

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

AXALIS™ - SUSPENDED

DIMENSIONAL DIAGRAMS

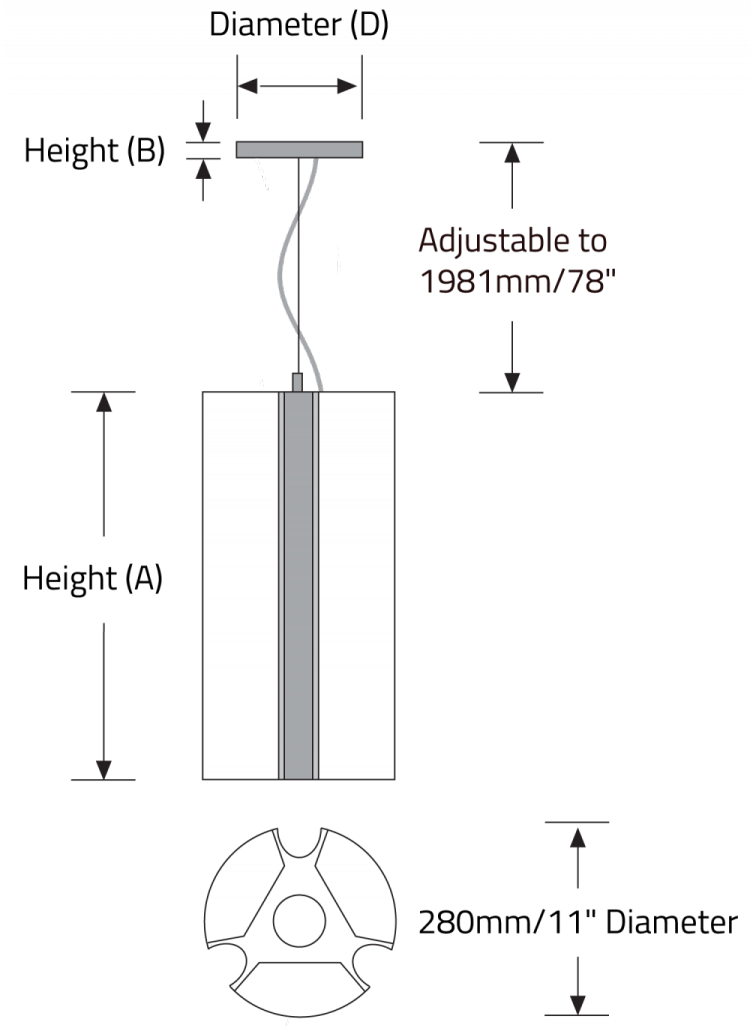

© 2026 Beta-Calco Inc. Specifications are subject to change without notice