

# AXALIS™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:



# AXALIS™ - SUSPENDED

## GENERAL SPECIFICATION

### Body and trim

Steel and aluminum.

### Power cable

Silver braided.

### Diffusers

Opal acrylic with an etched finish.

### Mechanical

Mounts directly over a junction box (by others - North America only).

### L70 @25°C (77°F)

> 50,000 hrs.

### Suspension

One stainless steel aircraft cable.

### Finish

Silver anodized.

### Drivers

Luminaires supplied with HPF electronic drivers, 120/277V (EU-240V). 0-10V dimming standard (10%).


### Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

### Delivered Lumens

Delivered lumens and LPW based on 3000K (min 80 CRI).

## OPTICS & FEATURES

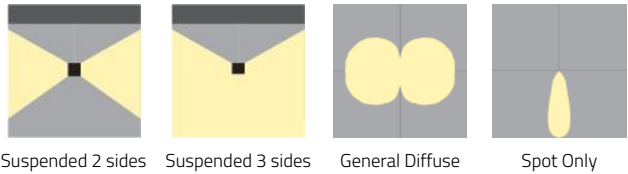

Suspended 2 sides

Suspended 3 sides

General Diffuse

Spot Only

# AXALIS™ - SUSPENDED

## HOW TO ORDER

### A. LUMINAIRE

<b>436052</b> 18", 3659 lms	<b>436054</b> 18", 4561 lms	<b>436056</b> 27", 5321 lms	<b>436058</b> 27", 7300 lms
<b>436071</b> 49", 8635 lms			

### B. CCT

<b>30</b> 3000K (min 80 CRI)	<b>35</b> 3500K (min 80 CRI)	<b>40</b> 4000K (min 80 CRI)
------------------------------	------------------------------	------------------------------

### C. DOWNLIGHT

<b>X1</b> Xacara downlight 28W LED 3000K (2587lm delivered)	<b>X2</b> Xacara downlight 28W LED 3500K (2665lm delivered)	<b>X3</b> Xacara downlight 28W LED 4000K (2690lm delivered)
--	--	--

### D. EMERGENCY

**EM** Integral Emergency

## TECHNICAL DATA

### LUMINAIRE

Code	436052	436054	436056	436058	436071
Power (LED)	48W	60W	72W	96W	115W
Delivered lms	3659	4561	5321	7300	8635
LPW	78	78	76	76	75
Height (A)	18"	18"	27"	27"	49"
Height (B)	1"	1"	1"	1"	1.8"

## APPROVALS



AXALIS™ - SUSPENDED

DIMENSIONAL DIAGRAMS

