
Project Name: Fixture Type:


Fixture Code: Quantities:







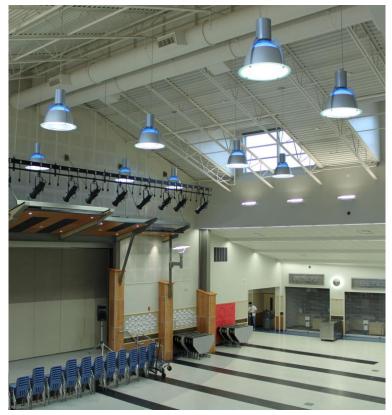

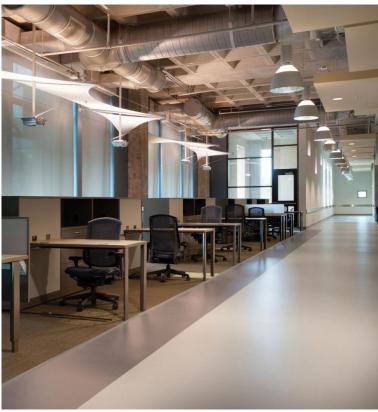

The industrial-style dome is a workhorse equipped with a reflector that maximizes the pendant's efficacy, delivering high light outputs suitable for the high ceilings of warehouses and superstores. Finished in Silver Metallic with optional opal or blue diffuser accent.

GENERAL SPECIFICATION

Body and Trim

Steel and aluminum.

Suspension

Twin aircraft cables.

Drivers

HPF electronic, 120/277V (EU-240V). 0-10V, 1% dimming standard. The driver is integral to the fixture housing.

Reflector

High purity aluminum, specular finish with vertical facets.

Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Decorative Disc

6mm/0.25" glass with a polished edge and a sandblasted finish.


Sensors

Consult factory regarding sensor compatibility.

Approvals

Damp location, (Indoor use only).

OPTICS & FEATURES









Declare

Direct-indirect

Finish

Powder coated Silver Metallic.

Power Cable

Silver braided.

Mechanical

Luminaires mount to a junction box (by others - North America only).

Indirect Lens

UV stabilized acrylic.

Delivered Lumens

Delivered lumens and LPW based on 3000K (min 80 CRI) and FR.

Decorative Ring

6mm/0.25" green tint, acrylic (faux glass) with a polished edge and a sandblasted finish.

Reported L70 @25°C (77°F)

> 50,000 hrs.

HOW TO ORDER

A. LUMINAIRE

201270 12.9", 2174 lms **201801** 16", 4216 lms 202250 22", 8208 lms 202254 22", 11107 lms

B. CCT

30 3000K (min 80 CRI) 35 3500K (min 80 CRI) 40 4000K (min 80 CRI)

C. REFLECTOR

FR Full Reflector **HG** Half Reflector/Opal Diffuser

D. DECORATIVE OPTIONS

DE Decorative Disc (suspended by four **DS** Decorative Disc (suspended by four cradle bars)

spacers)

RG Decorative Ring (suspended by four cradle bars)

RR Decorative Ring (suspended by four

spacers)

LED diodes are visible when no shielding option is selected.

E. OPTIONS

BL Blue Lens **RE** Remote Emergency (max distance

15 ft, 120/277V, not available with

347V)

3 347V (22" diameter only, not available

with Remote Emergency)

TECHNICAL DATA

LUMINAIRE

Code	201270	201801	202250	202254
Power (LED)	27W	54W	65W	91W
Delivered Ims	2174	4216	8208	11107
LPW	79	78	125	122
Height (H)	17.5"	22"	27"	27"
Diameter (D)	12.9"	16"	22"	22"
Weight	20lb	20lb	22lb	24lb

APPROVALS












DIMENSIONAL DIAGRAMS

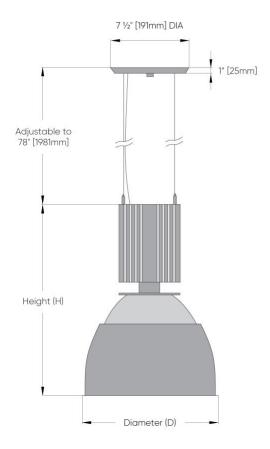

Code	Height (H)	Diameter (D)	
201270	17 ½" [444mm]	12 ⁷ / ₈ " [328mm]	
201801	22" [559mm]	16" [406mm]	
202250	27" [686mm]	22" [559mm]	
202254	27" [686mm]	22" [559mm]	