

# BELARO REFLECTOR™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



**BELARO REFLECTOR™ - SUSPENDED**



# BELARO REFLECTOR™ - SUSPENDED

The industrial-style dome is a workhorse equipped with a reflector that maximizes the pendant's efficacy, delivering high light outputs suitable for the high ceilings of warehouses and superstores. Finished in Silver Metallic with optional opal or blue diffuser accent.

## GENERAL SPECIFICATION

### Body and trim

Steel and aluminum.

### Suspension

Twin aircraft cables.

### Drivers

HPF electronic, 120/277V (EU-240V). 0-10V, 1% dimming standard. The driver is integral to the fixture housing.

### Reflector

High purity aluminum, specular finish with vertical facets.

### Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

### Delivered Lumens

Delivered lumens and LPW based on 3000K (min 80 CRI) and FR.

### Reported L70 @25°C (77°F)

> 50,000 hrs.

### Finish

Powder coated Silver Metallic.

### Power cable

Silver braided.

### Mechanical

Luminaires mount to a junction box (by others - North America only).

### Upper diffuser

UV stabilized acrylic.

### Decorative disc

6mm/0.25" glass with a polished edge and a sandblasted finish.

### Decorative ring

6mm/0.25" green tint, acrylic (faux glass) with a polished edge and a sandblasted finish.

### Sensors

Consult factory regarding sensor compatibility.


### Approvals

Damp location, (Indoor use only).

## MOUNTING & OPTICS



Suspended Direct




Suspended Direct/Indirect



Direct



Direct-indirect



Declare



# BELARO REFLECTOR™ - SUSPENDED

## HOW TO ORDER

### A. LUMINAIRE

**201270** 12.9", 2174 lms

**201801** 16", 4216 lms

**202250** 22", 8208 lms

**202254** 22", 11107 lms

### B. CCT

**30** 3000K (min 80 CRI)

**35** 3500K (min 80 CRI)

**40** 4000K (min 80 CRI)

### C. REFLECTOR

**FR** Full Reflector

**HG** Half Reflector/Opal Diffuser

### D. DECORATIVE OPTIONS

**DE** Decorative Disc (suspended by four cradle bars)

**DS** Decorative Disc (suspended by four spacers)

**RG** Decorative Ring (suspended by four cradle bars)

**RR** Decorative Ring (suspended by four spacers)

---

LED diodes are visible when no shielding option is selected.

### E. OPTIONS

**BL** Blue Diffuser

**RE** Remote Emergency (max distance 15 ft, 120/277V, not available with 347V)

**3** 347V (22" diameter only, not available with Remote Emergency)



# BELARO REFLECTOR™ - SUSPENDED

## TECHNICAL DATA

### LUMINAIRE

Code	201270	201801	202250	202254
Power (LED)	27W	54W	65W	91W
Delivered lms	2174	4216	8208	11107
LPW	79	78	125	122
Height (H)	17.5"	22"	27"	27"
Diameter (D)	12.9"	16"	22"	22"
Weight	20lb	20lb	22lb	24lb

---

## APPROVALS




IP20



# BELARO REFLECTOR™ - SUSPENDED

## DIMENSIONAL DIAGRAMS

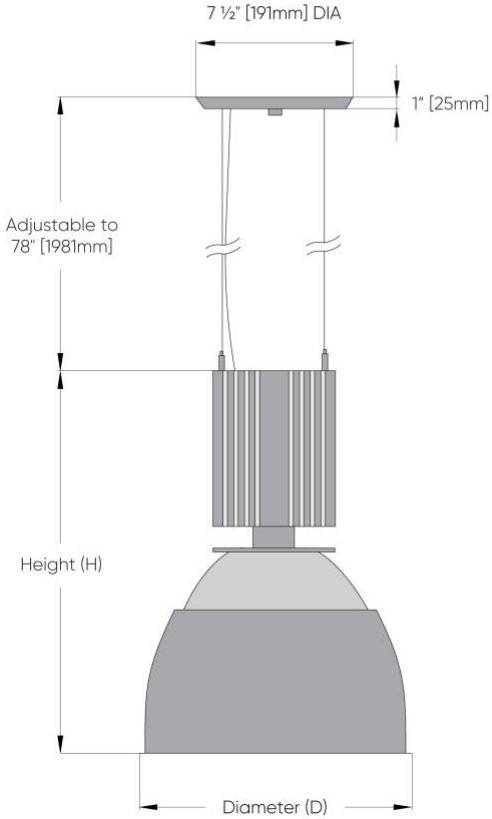

Code	Height (H)	Diameter (D)
201270	17 1/2" [444mm]	12 7/8" [328mm]
201801	22" [559mm]	16" [406mm]
202250	27" [686mm]	22" [559mm]
202254	27" [686mm]	22" [559mm]