
BELARO REFRACTOR™ - SUSPENDED

	Project Name:			Fixture Type:
	Fixture Code:			Quantities:
A. LUMINAIRE				
201250 12.5", 17	703 lms	201821 16", 6187 lms	202270 22", 7607 lms	202274 22", 10867 lms
B. CCT				
30 3000K (min 80) CRI)	35 3500K (min 80 CRI)	40 4000K (min 80 CRI)	
C. DECORATIVE	OPTIONS			
DE Decorative Dis cradle bars)	sc (suspended by four	DS Decorative Disc (suspended by four spacers)	RG Decorative Ring (suspended by four cradle bars)	RR Decorative Ring (suspended by four spacers)
D. OPTIONS				
WR White Refrac	tor	RE Remote Emergency (max distance 15ft, 120/277V, not available with 347V)	3 347V (22" diameter only, not available with Remote Emergency)	

BELARO REFRACTOR™ - SUSPENDED

DIMENSIONAL DIAGRAMS

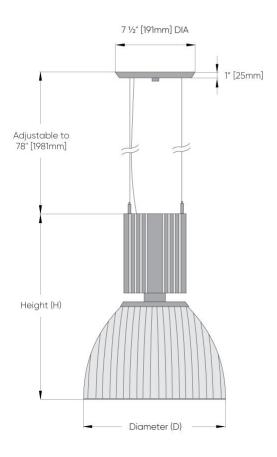

Code	Height (H)	Diameter (D)
201250	20 ½" [521mm]	12 ½" [318mm]
201821	22" [559mm]	16" [406mm]
202270	27" [686mm]	22" [559mm]
202274	27" [686mm]	22" [559mm]