BLADE II™ - WALL SURFACE EXTERIOR

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

BLADE II™ - WALL SURFACE EXTERIOR

GENERAL SPECIFICATION

Body and trim
Die-cast aluminium.

Finish
Silver powder coated, RAL9006.

Front fascia
Injection molded plastic, UV stabilised, painted RAL9006. Front fascia can be custom painted to special order (Consult factory).

Gasketing
Heat resistant silicone.

Drivers
HPF, electronic for 120-277V (EU-240V).

Minimum Starting Temperature
-30°C.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES



Ext-Wall Up/Down | Narrow | Medium | Twin Narrow

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

BLADE II™ - WALL SURFACE EXTERIOR

HOW TO ORDER

A. LUMINAIRE

662004 662004 **662014** 662014 **662024** 662024 **662034** 662034
662044 662044

B. CCT

30 3000K (min 80 CRI) **40** 4000K (min 80 CRI) **B** Blue

C. DIMMING

DB Dimming 0-10V (10%)

TECHNICAL DATA

LUMINAIRE


Code	**662004**	**662014**	**662024**	**662034**	**662044**
2 x 3W	Narrow Beam	Medium/Narrow Beam	Medium Beam	Twin/Narrow Beam	Twin Beam
Beam	10°	40°/10°	40°	2x5°/10°	2x5°
Delivered lms	2 x 236	2 x 236	2 x 236	2 x 236	2 x 236

APPROVALS

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

BLADE II™ - WALL SURFACE EXTERIOR

DIMENSIONAL DIAGRAMS

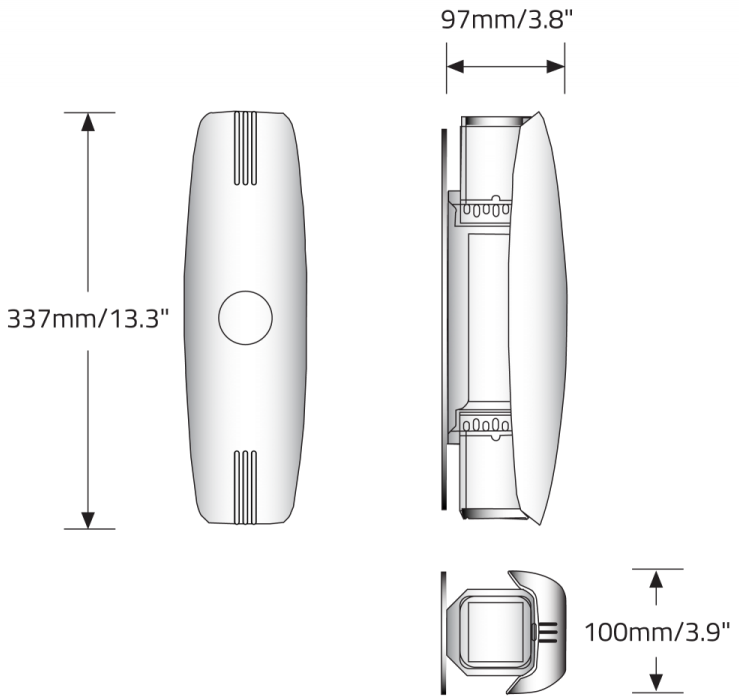

© 2026 Beta-Calco Inc. Specifications are subject to change without notice