

# BLADE IV™ - WALL SURFACE EXTERIOR

Project Name:

Fixture Type:

Fixture Code:

Quantities:



# BLADE IV™ - WALL SURFACE EXTERIOR

## GENERAL SPECIFICATION

### Body and trim

Die-cast aluminium.

### Finish

Silver powder coated, RAL9006.

### Front fascia

Injection molded plastic, UV stabilised, painted RAL9006. Front fascia can be custom painted to special order(Consult factory).

### Gasketing

Heat resistant silicone.

### Drivers

HPF, electronic for 120-277V (EU-240V).


### Minimum Starting Temperature

-30°C.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

## MOUNTING & OPTICS

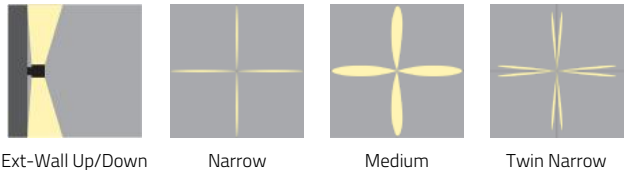

Ext-Wall Up/Down

Narrow

Medium

Twin Narrow

# BLADE IV™ - WALL SURFACE EXTERIOR

## HOW TO ORDER

### A. LUMINAIRE

**664004** 664004

**664014** 664014

**664024** 664024

**664034** 664034

### B. CCT

**30** 3000K (min 80 CRI)

**40** 4000K (min 80 CRI)

**B** Blue

### C. DIMMING

**DB** Dimming 0-10V, 10%

## TECHNICAL DATA

### LUMINAIRE

Code	<b>664004</b>	<b>664014</b>	<b>664024</b>	<b>664034</b>
<b>4 x 3W</b>	Narrow Beam	Twin Beam	Medium Beam	Narrow/Medium Beam
<b>Beam</b>	10°	2x5°	40°	10°/40°
<b>Delivered lms</b>	4 x 236	4 x 236	4 x 236	4 x 236

## APPROVALS

ADA



CE



IP65



# BLADE IV™ - WALL SURFACE EXTERIOR

## DIMENSIONAL DIAGRAMS

