BLOCK™

FULL SPECIFICATION SHEET

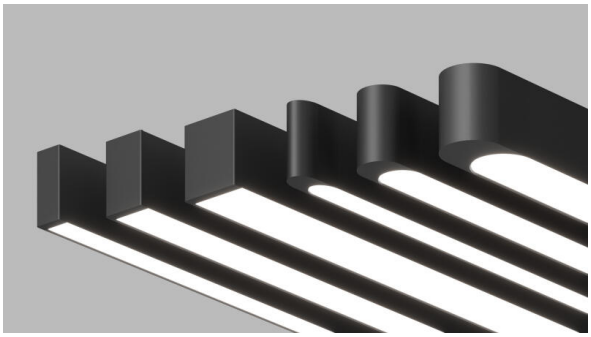

FIXTURE TYPE	FIXTURE CODE	QUANTITIES

1 DESCRIPTION

BLOCK stands as an unwavering workhorse among linear systems, delivering versatile performance to meet the specific aesthetic and functional needs of any project. Available in three aperture sizes (1.5", 2.5", and 3.5"), **BLOCK** allows designers to tailor lighting to suit any space. The choice of end caps in either sleek flat or elegant curved enhances the luminaire aesthetics, while the seamless rollout diffuser ensures uniform, shadow-free illumination. With precision light distributions – Diffused, Widespread, Batwing, and Asymmetric– and eight lumen packages ranging from 200 LM/FT to 1600 LM/FT, **BLOCK** offers powerful, energy-efficient lighting with luminous efficacy up to 152 LPW. By integrating BIOS technology, the series supports circadian regulation, enhancing the overall environment to promote health and well-being. Embodying precision, **BLOCK** fulfills its specification promises with finesse, making it an unequivocal choice for those seeking adaptability across a spectrum of performance criteria and budget considerations.

2 OPTICS & FEATURES

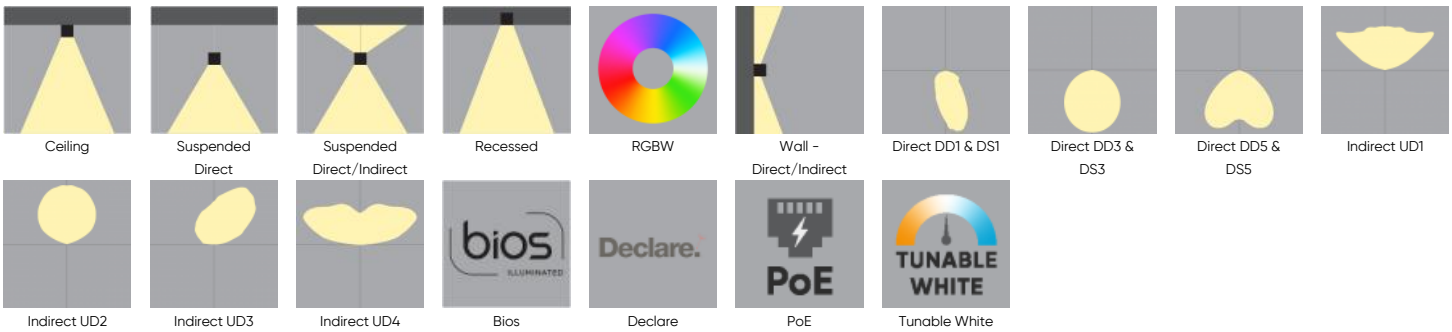

Ceiling | Suspended Direct | Suspended Direct/Indirect | Recessed | RGBW | Wall - Direct/Indirect | Direct DD1 & DS1 | Direct DD3 & DS3 | Direct DD5 & DS5 | Indirect UD1

Indirect UD2 | Indirect UD3 | Indirect UD4 | Bios | Declare | PoE | Tunable White

3 APPROVALS

Intertek | CE | DAMP LOCATION | F

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

IP20

4 GENERAL SPECIFICATION

BODY
Aluminum.

SUSPENSION
Steel cables.

DRIVERS
HPF electronic drivers for 120-277V, 347 (EU-240V). The driver is integral to the fixture housing.

BIOS
For circadian lighting, consult factory.

TUNABLE WHITE
Tunable White range from 2700K to 6500K is available. Consult factory.

DELIVERED LUMENS
Delivered lumens & LPW based on 4000K CRI 80+

FIXTURE LENGTHS
Available in 1" increments. Contact the factory for details.

ESTIMATED L70 @25°C (77°F)
> 165,000 hrs @ 2000 lumens/ft (6000 lumens/m)

INTEGRAL EMERGENCY SYSTEM(E1)
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.Refer to the Emergency option notes below for wattage, configuration and regional details.

FINISH
Powder coated.

POWER CABLE
Silver braided.

POE
Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

JUNCTIONS
X and T junctions available, consult factory.

RGBW
RGBW available, consult factory.

MECHANICAL
Luminaires mount directly over J box (by others).

REPORTED L70 @25°C (77°F)
> 60,000 hrs @ 2000 lumens/ft (6000 lumens/m)

LENS
Opal acrylic lens in 2 versions: roll-out or snap-in. The snap-in version is provided with standalone luminaires, while the roll-out lens is designed for continuous systems. When an order includes both standalone and continuous units, the roll-out lens will be provided for all.

LUMINAIRE LEVEL LIGHTING CONTROLS
Designed for integration with luminaire-level lighting controls from Cooper, Lutron, and Wattstopper. Standard options are listed on this specification sheet. Additional control solutions are available upon factory request.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

APPROVALS
Damp Rated.

DESIGN
US Design Patent Pending.

SEISMIC BRACING
Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

SUSTAINABILITY
Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS

LUMINAIRE

Pendant

Ceiling


Wall

Recessed

APERTURE


1.5"


2.5"


3.5"

RUN TYPE

Straight



L shape [1]



U shape [1]



Quad [1]

[1] Consult factory if L shape, U shape, or Quad is required with Wall mount. X and T junctions available, consult factory.

* There is one power cable for a max overall length is 50ft, beyond that extra power cables are required. Consult factory.

END CAP PROFILE

Not required

Flat

Curved

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ASYMMETRIC DIRECTION

Not required



Inward [1]



Outward [1]

[1] Only required when the run type is not straight (TR01). If an asymmetric distribution is required with the straight run type (TR01), the asymmetric distribution will be directed away from the wall.

FIXTURE FINISH

White - Textured

Black Metallic - Textured

Silver Metallic - Textured

Gold Metallic - Textured

Wood grain - Light Cherry [1]

Wood grain - Dark Walnut [1]

Wood grain - White Oak [1]


Midnight Blue Metallic - Textured

Copper Metallic

Charcoal Metallic - Textured

Bronze Metallic - Textured

Champagne Metallic

Red Metallic - Textured

[1] Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

CANOPY FINISH

Not required

White - Textured

Black Metallic - Textured

Silver Metallic - Textured

Gold Metallic - Textured


Midnight Blue Metallic - Textured

Copper Metallic

Charcoal Metallic - Textured

Bronze Metallic - Textured

Champagne Metallic

Red Metallic - Textured

6 HOW TO ORDER

LUMINAIRE TYPE

BLKP Pendant
BLKC Ceiling
BLKW Wall
BLKR Recessed

DIRECTION

DT1 Direct
DT2 Direct/Indirect
DT3 Indirect

One power cord for every 50 linear ft.

APERTURE

PW01 1.5"
PW02 2.5"
PW03 3.5"

RUN TYPE

TR01 Straight
TR02 L shape [1]
TR03 U shape [1]
TR04 Quad [1]

[1] Consult factory if L shape, U shape, or Quad is required with Wall mount. X and T junctions available, consult factory.
* There is one power cable for a max overall length is 50ft, beyond that extra power cables are required. Consult factory.

LENGTH - A

The minimum length to order is 2ft and orders are to be in 2ft increments. The maximum is 90ft.
Examples:
4ft = SFA0400, 10ft = SFA1000, 50ft = SFA5000

SFA_ _ _ _

LENGTH - B

The minimum length to order is 2ft and orders are to be in 2ft increments. The maximum is 90ft.
Examples:
4ft = SFB0400, 10ft = SFB1000, 50ft = SFB5000

SFB_ _ _ _

LENGTH - C

The minimum length to order is 2ft and orders are to be in 2ft increments. The maximum is 90ft.
Examples:
4ft = SFC0400, 10ft = SFC1000, 50ft = SFC5000

SFC_ _ _ _

MAX LENGTH PER SECTION

SL02 2ft [1]
SL04 4ft
SL06 6ft
SL08 8ft
SL10 10ft
SL12 12ft

[1] The dimming curves on the 2ft section length (SL02) will differ from the other sizes.
You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

END CAP PROFILE

EP00 Not required
EP01 Flat
EP02 Curved

LM/FT (DIRECT)

LPF000 Not required
LPF020 200 lm/ft
LPF040 400 lm/ft
LPF060 600 lm/ft
LPF080 800 lm/ft
LPF100 1000 lm/ft
LPF120 1200 lm/ft
LPF140 1400 lm/ft

[1] Not available with 1.5" aperture.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

LM/FT (INDIRECT)

LPG000 Not required
LPG020 200 lm/ft
LPG040 400 lm/ft
LPG060 600 lm/ft
LPG080 800 lm/ft
LPG100 1000 lm/ft
LPG120 1200 lm/ft
LPG140 1400 lm/ft [1]
LPG165 1650 lm/ft [1]

[1] Not available with Assymetric Indirect Lens (UD3).

CRI

CR80 CRI 80+
CR90 CRI 90+

CCT DIRECT

CTA00 Not required
CTA27 2700K
CTA30 3000K
CTA35 3500K
CTA40 4000K
CTA50 RGBW [1]
CTA60 Tunable White

[1] RGBW is supplied with an extra power cable and is available with DMX dimming only.
Not available with V3. Consult factory.
* If RGBW or Tunable White is required, it needs to be selected for both direct and indirect. For other combinations, consult factory.

CCT INDIRECT

CTB00 Not required
CTB27 2700K
CTB30 3000K
CTB35 3500K
CTB40 4000K
CTB50 RGBW [1]
CTB60 Tunable White

[1] RGBW is supplied with an extra power cable and is available with DMX dimming only.
Not available with V3. Consult factory.
* If RGBW or Tunable White is required, it needs to be selected for both direct and indirect. For other combinations, consult factory.

DIRECT LENS

DD0 Not required
DD1 Asymmetric [1]
DD3 Diffused
DD5 Widespread
DS1 Asymmetric - Seamless [1] [2]
DS3 Diffused - Seamless [1]
DS5 Widespread - Seamless [2]

[1] Available with straight run type (TR01) and lengths above 10ft only. Seamless diffusers available up to 32ft. Longer fixtures will have at least one seam.
* Fixed Length available upon request.

INDIRECT LENS

UD0 Not required
UD1 Batwing [3]
UD2 Diffused
UD3 Asymmetric [1]
UD4 Extra Wide Batwing [2] [3]

[1] Available up to 1200 lm/ft. For straight run type (TR01), when standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.
[2] Available up to 1400 lm/ft.
[3] Available with only pendant suspension.

ASYMMETRIC DIRECTION

ASD0 Not required
ASD1 Inward [1]
ASD2 Outward [1]

[1] Only required when the run type is not straight (TR01). If an asymmetric distribution is required with the straight run type (TR01), the asymmetric distribution will be directed away from the wall.

BLACKOUT PLATE

UB00 Not required
UB_ _ Blackout plate [1]

[1] Available on a per foot basis. May be required to prevent lighting up of duct work in loft type applications.

VOLTAGE

V1 120/277V
V2 240V [1]
V3 347V [2]
V4 Low Voltage [3]

[1] Not available in North America. [2] Only available with DA01 dimming. [3] Only available with DA45 dimming.

DIMMING

DA01 0-10V Dimming 1.0%
DA02 0-10V Dimming 0.1% [1]
DA20 DALI Dimming 0.1% [1]
DA21 DALI Dimming 1.0% [1]
DA23 DALI DT8 Dimming 0.1% - Tunable White [1] [2]
DA40 DMX Dimming [3]
DA45 PoE [4]
DA03 0-10V Dimming, Dim-To-Off (Controls) [1] [5]
DA04 DALI Dimming 1.0% (Controls) [1] [5]

[1] Not available with V3.
[2] Only available with Tunable White.
[3] Only available with RGBW. Consult factory.
[4] Only available with V4. Not available with RGBW.
[5] Select this option if sensors or controllers are required.

CEILING TYPE

G0 Not required
G1 Grid ceiling [1]
H1 Hard ceiling [2]

The cost for the canopies, power cables, connections mechanisms and endcaps for the fixture has been added to these items.
[1] Combo kit provided includes installation to T-bar and through tile mount. [2] Designed for drywall ceilings.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

CEILING TRIM

RT0 Not required

RT1 Tegular T-bar [1] [2]

RT2 Lay-In T-Bar [1]

RT3 Trimless [1] [4]

RT4 Trim [1] [4]

[1] For Recessed luminaires only.
[2] Fixture designed to fit into a 9/16" or 15/16" standard tegular grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.
[3] Fixture designed to fit into a 9/16" or 15/16" standard grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.
[4] Fixture designed for drywall ceilings. All fixture metalwork can be either white or black.

SUSPENSION

HLA00 Not required

HLA03 3ft cable suspension

HLA06 6ft cable suspension

HLA09 9ft cable suspension

* Note: Special order available on lengths over 13ft and may be subject to longer lead times, consult factory.

FIXTURE FINISH

FA01 White - Textured

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA25 Gold Metallic - Textured

FA27 Wood grain - Light Cherry [1]

FA28 Wood grain - Dark Walnut [1]

FA30 Wood grain - White Oak [1]

FA44 Midnight Blue Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

[1] Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

CANOPY FINISH

CF00 Not required

CF01 White - Textured

CF02 Black Metallic - Textured

CF20 Silver Metallic - Textured

CF25 Gold Metallic - Textured

CF44 Midnight Blue Metallic - Textured

CF45 Copper Metallic

CF46 Charcoal Metallic - Textured

CF47 Bronze Metallic - Textured

CF52 Champagne Metallic

CF53 Red Metallic - Textured

QUANTITY OF EMERGENCY SECTIONS

E0 Not required

E1 Emergency system - Integral [1] [2]

E3 Emergency generated circuit - Remote [1]

[1] Specify quantity of emergency sections or emergency generator circuits required based off total length of run. Not available with 347V.
[2] For North America, the minimum emergency system wattage is 10W. Refer to the fixture's lumens per watt to estimate emergency light output. The emergency system typically powers only a portion of the fixture, depending on the fixture configuration and number of drivers. Consult factory for emergency system configuration and illuminated section details.
For Europe, the emergency system wattage and configuration may vary. Consult factory for details.
Note: A drawing will be required at the time of ordering to determine the required location of the emergency sections or generator circuits.

CIRCUITS

CS1 Single circuit

CS2 Dual circuit [1]

[1] To control direct and indirect independently.

SENSORS AND CONTROLLERS

SNCN00 Not required

SNCPRA_ _ Cooper WaveLinx PRO Sensor [1] [3]

SNLGRA_ _ Legrand Wattstopper Sensor [1] [2] [3]

SNLGRB_ _ Legrand Wattstopper PLUS Sensor [1] [2] [3]

SNLUTA_ _ Lutron Athena Sensor [1] [2] [3]

SNLUTC_ _ Lutron Vive Sensor [2] [3]

SNLGRC_ _ Legrand Standalone Occupancy Sensor [1] [3]

SNLGRD_ _ Legrand Standalone Daylight Sensor [1] [3]

CNLGRB Legrand Wattstopper PLUS Controller [1] [2] [3]

CNLUTA Lutron Athena Controller [1] [2] [3]

CNLUTC Lutron Vive Controller [2] [3]

[1] Available with 0-10V dim-to-off dimming.
[2] Available with DALI dimming 1.0% (DA04).
[3] Only available with single circuit (CS1).
* If 0-10V dimming is required, only available with the dim-to-off option (DA03). For other sensors and controllers, consult factory.
* Refer to the Controls Configurations document for locations and suggested quantities based on linear length.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

7 PERFORMANCE DATA

1.5 DIRECT DIFFUSED (DD3 AND DS3)



LUMEN/FT	WATT/FT	LPW
1000	9	109
800	7	111
600	5	115
400	3	119
200	2	121

1.5 DIRECT WIDESPREAD (DD5 AND DS5)



LUMEN/FT	WATT/FT	LPW
1000	10	102
800	8	106
600	5	111
400	4	115
200	2	119

1.5 DIRECT ASYMMETRIC (DD1 AND DS1)



LUMEN/FT	WATT/FT	LPW
1000	9	107
800	7	108
600	5	112
400	3	115
200	2	117

2.5 DIRECT DIFFUSED (DD3 AND DS3)



LUMEN/FT	WATT/FT	LPW
1400	13	122
1200	11	126
1000	9	131
800	7	132
600	5	136
400	3	141
200	2	143

2.5 DIRECT WIDESPREAD (DD5 AND DS5)



LUMEN/FT	WATT/FT	LPW
1400	13	112
1200	11	116
1000	9	119
800	7	122
600	5	126
400	3	130
200	2	131

2.5 DIRECT ASYMMETRIC (DD1 AND DS1)



LUMEN/FT	WATT/FT	LPW
1200	13	98
1000	10	103
800	8	106
600	5	111
400	4	115
200	2	121

3.5 DIRECT DIFFUSED (DD3 AND DS3)



LUMEN/FT	WATT/FT	LPW
1400	13	130
1200	11	134
1000	9	137
800	7	141
600	5	145
400	3	149
200	2	151

3.5 DIRECT WIDESPREAD (DD5 AND DS5)



LUMEN/FT	WATT/FT	LPW
1400	13	117
1200	11	121
1000	9	124
800	7	127
600	5	131
400	3	135
200	2	137

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

3.5 DIRECT ASYMMETRIC (DD1 AND DS1)



LUMEN/FT	WATT/FT	LPW
1400	13	124
1200	11	128
1000	9	131
800	7	135
600	5	139
400	3	143
200	2	145

INDIRECT BATWING (UD1)



LUMEN/FT	WATT/FT	LPW
1650	13	132
1400	10	137
1200	9	140
1000	7	144
800	6	146
600	4	150
400	3	153
200	1	153

EXTRAWIDE BATWING (UD4)



LUMEN/FT	WATT/FT	LPW
1400	13	113
1200	10	116
1000	8	119
800	7	123
600	5	127
400	3	129
200	2	131

INDIRECT ASYMMETRIC (UD3)



LUMEN/FT	WATT/FT	LPW
1200	13	97
1000	10	100
800	9	102
600	6	107
400	4	109
200	2	112

INDIRECT OPAL DIFFUSER (UD2)



LUMEN/FT	WATT/FT	LPW
1650	13	128
1400	11	132
1200	9	135
1000	7	139
800	6	141
600	4	144
400	3	147
200	1	150

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

8 TM-30 DATA

CCT 2700K

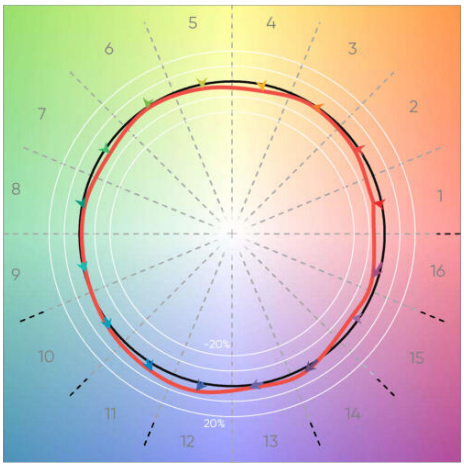

CRI (Ra)	93
CRI (R9)	61
TM30 Rf	91
TM30 Rg	98
Duv	-0.0022

CCT 3000K

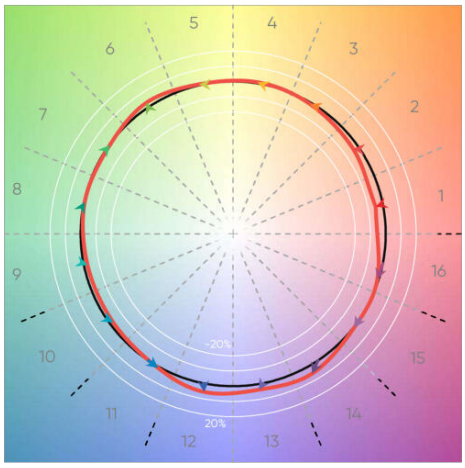

CRI (Ra)	92
CRI (R9)	58
TM30 Rf	92
TM30 Rg	100
Duv	-0.0003

CCT 3500K

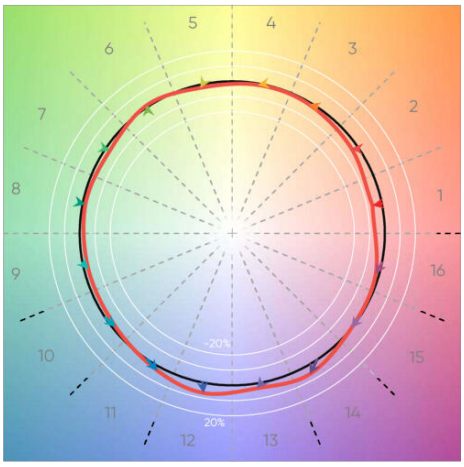

CRI (Ra)	91
CRI (R9)	53
TM30 Rf	90
TM30 Rg	99
Duv	-0.0007

CCT 4000K

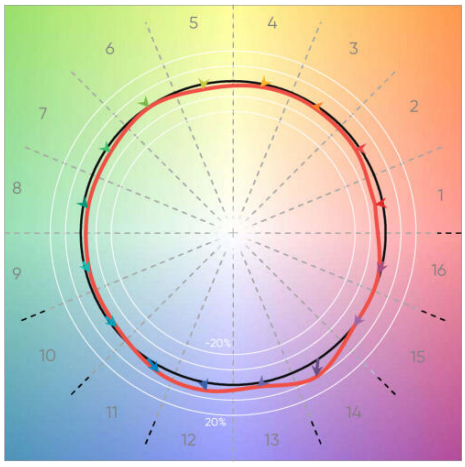

CRI (Ra)	93
CRI (R9)	64
TM30 Rf	90
TM30 Rg	98
Duv	0.0000

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

9 DIMENSIONAL DIAGRAMS

Block 1.5/2.5/3.5" - Dimensional Diagrams

BLOCK 1.5



BLOCK 2.5



BLOCK 3.5

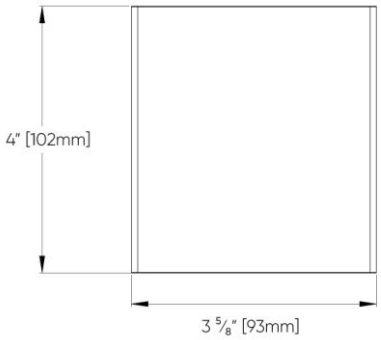





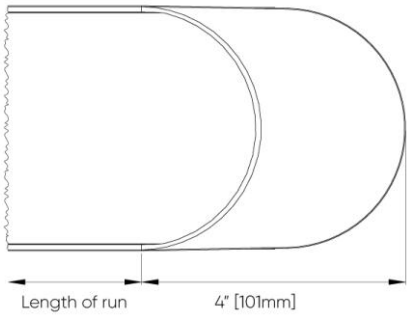







© 2026 Beta-Calco Inc. Specifications are subject to change without notice

PENDANT

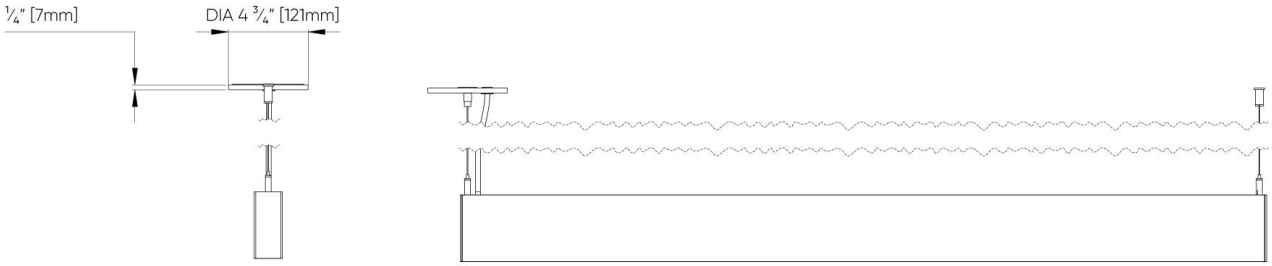

SURFACE

WALL

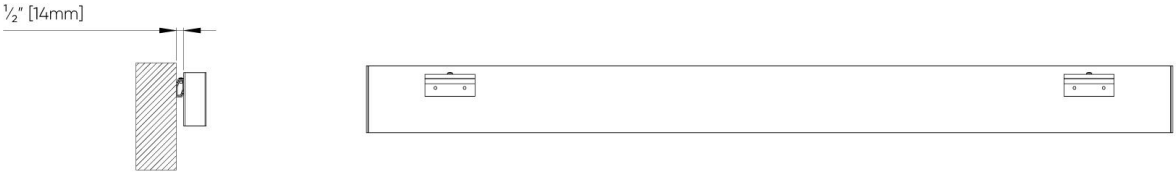

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

RECESSED - Grid Ceiling

Tegular ceiling

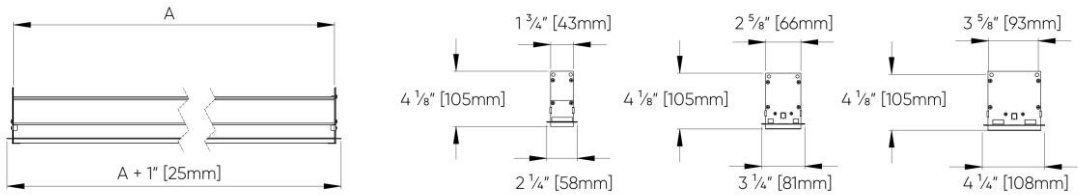

T-bar ceiling

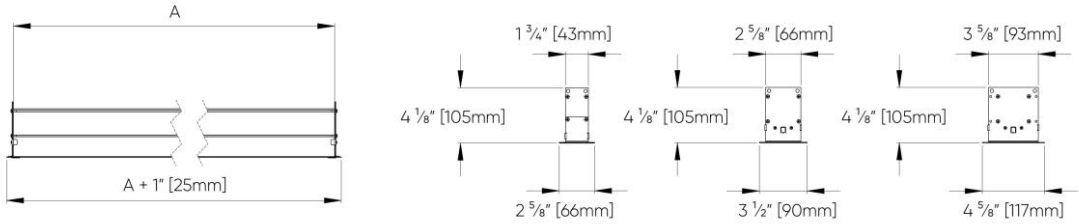

GRID CEILING	
Max Length (Per Section)	A
4ft	46 ¾" [1186mm]
6ft	70 ¾" [1796mm]
8ft	94 ¾" [2405mm]
10ft	118 ¾" [3015mm]
12ft	142 ¾" [3625mm]

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

RECESSED - Hard Ceiling

Trimless

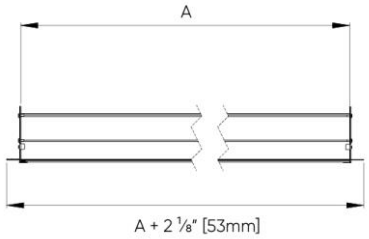

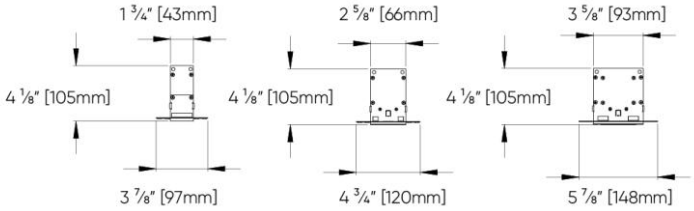

Trim



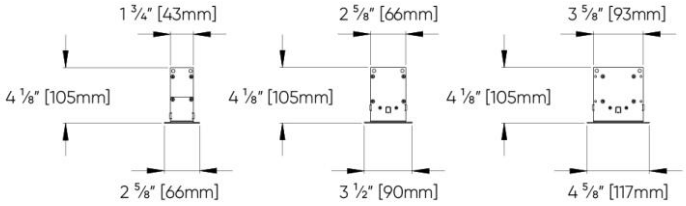

HARD CEILING	
Max Length (Per Section)	A
4ft	48" [1219mm]
6ft	72" [1829mm]
8ft	96" [2438mm]
10ft	120" [3048mm]
12ft	144" [3658mm]

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WALL MOUNT CONFIGURATIONS

4FT

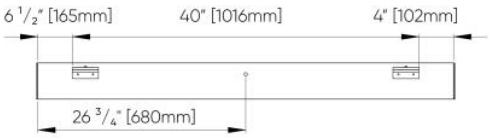

6FT

8FT

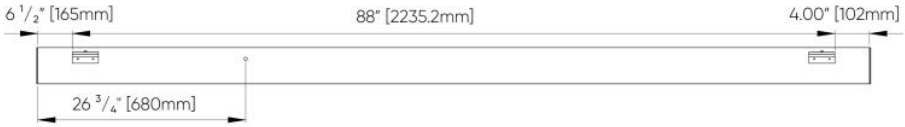

10FT

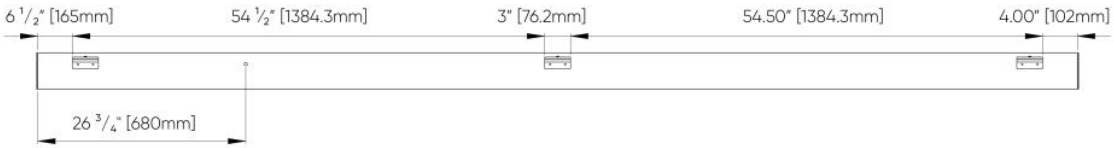

12FT

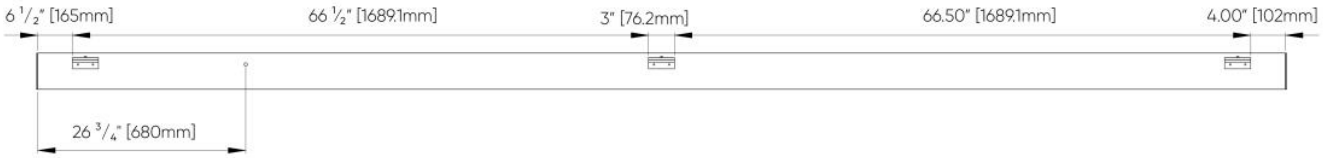

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

Block 1.5/2.5/3.5" Systems - Dimensional Diagrams

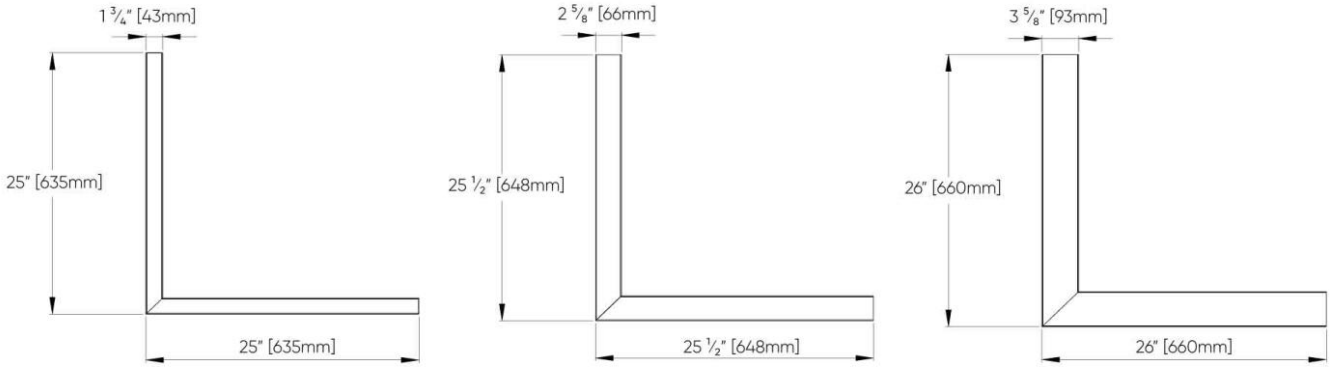

Run Type

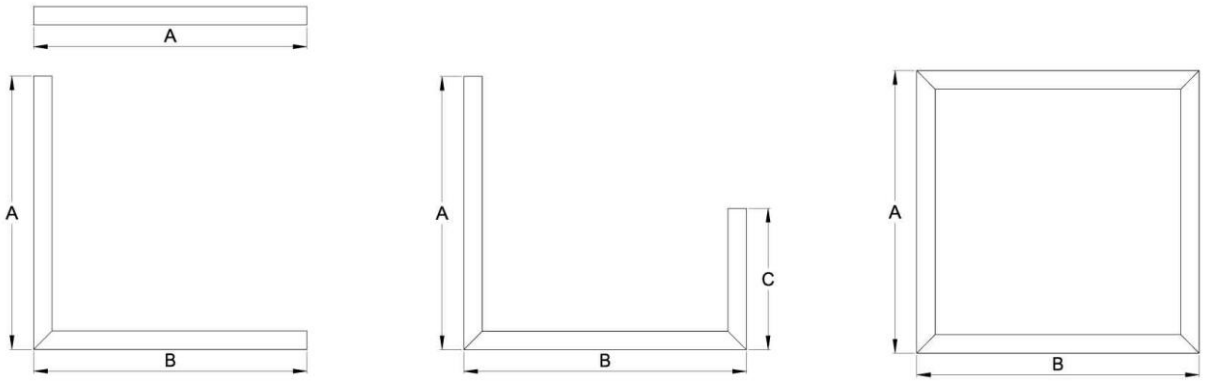

© 2026 Beta-Calco Inc. Specifications are subject to change without notice