





BLOCK™


SHORT SPECIFICATION SHEET

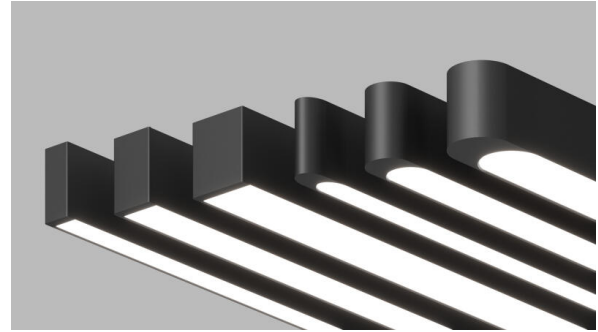

FIXTURE TYPE



FIXTURE CODE



QUANTITIES

1 HOW TO ORDER

1. LUMINAIRE TYPE

BLKP Pendant

BLKC Ceiling

BLKW Wall

BLKR Recessed

2. DIRECTION

DT1 Direct

DT2 Direct/Indirect

DT3 Indirect

One power cord for every 50 linear ft.

3. APERTURE

PW01 1.5"

PW02 2.5"

PW03 3.5"

4. RUN TYPE

TR01 Straight

TR02 L shape ¹

TR03 U shape ¹

TR04 Quad ¹

¹ Consult factory if L shape, U shape, or Quad is required with Wall mount. X and T junctions available, consult factory.* There is one power cable for a max overall length is 50ft, beyond that extra power cables are required. Consult factory.

5. LENGTH - A

The minimum length to order is 2ft and orders are to be in 2ft increments. Examples:

4ft = SFA0400, 10ft = SFA1000, 50ft = SFA5000

SFA_ _ _ _

The minimum length to order is 2ft and orders are to be in 2ft increments. Examples:

4ft = SFA0400, 10ft = SFA1000, 50ft = SFA5000

6. LENGTH - B

The minimum length to order is 2ft and orders are to be in 2ft increments. Examples:

4ft = SFB0400, 10ft = SFB1000, 50ft = SFB5000

SFB_ _ _ _

The minimum length to order is 2ft and orders are to be in 2ft increments. Examples:

4ft = SFB0400, 10ft = SFB1000, 50ft = SFB5000

7. LENGTH - C

The minimum length to order is 2ft and orders are to be in 2ft increments. Examples:

4ft = SFC0400, 10ft = SFC1000, 50ft = SFC5000

SFC_ _ _ _

The minimum length to order is 2ft and orders are to be in 2ft increments. Examples:

4ft = SFC0400, 10ft = SFC1000, 50ft = SFC5000

8. MAX LENGTH PER SECTION

SL02 2ft ¹

SL04 4ft

SL06 6ft

SL08 8ft

SL10 10ft

SL12 12ft

¹ The dimming curves on the 2ft section length (SL02) will differ from the other sizes.

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

9. END CAP PROFILE

EP00 Not required

EP01 Flat

EP02 Curved

10. LM/FT (DIRECT)

LPF000 Not required	LPF020 200 lm/ft	LPF040 400 lm/ft	LPF060 600 lm/ft
LPF080 800 lm/ft	LPF100 1000 lm/ft	LPF120 1200 lm/ft	LPF140 1400 lm/ft

¹ Not available with 1.5" aperture.

11. LM/FT (INDIRECT)

LPG000 Not required	LPG020 200 lm/ft	LPG040 400 lm/ft	LPG060 600 lm/ft
LPG080 800 lm/ft	LPG100 1000 lm/ft	LPG120 1200 lm/ft	LPG140 1400 lm/ft ¹
LPG165 1650 lm/ft ¹			

¹ Available with UD1 (clear diffuser) only.

12. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

13. CCT DIRECT

CTA00 Not required	CTA27 2700K	CTA30 3000K	CTA35 3500K
CTA40 4000K	CTA60 Tunable White ¹		

¹ Consult factory. * RGBW available, consult factory.

14. CCT INDIRECT

CTB00 Not required	CTB27 2700K	CTB30 3000K	CTB35 3500K
CTB40 4000K	CTB60 Tunable White ¹		

¹ Consult factory. * RGBW available, consult factory.

15. DIRECT LENS

DD0 Not required	DD3 Diffused	DS3 Diffused – Seamless ¹
-------------------------	---------------------	---

¹ Available with straight run type (TR01) only. Seamless diffusers available up to 32ft. Longer fixtures will have at least one seam. Fixed Length available upon request.

16. INDIRECT LENS

UD0 Not required **UD1** Batwing **UD2** Diffused **UD3** Asymmetric ¹

¹ Available up to 1200 lm/ft. For straight run type (TR01), when standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

17. ASYMMETRIC DIRECTION

ASD0 Not required **ASD1** Inward **ASD2** Outward

¹ Available up to 1200 lm/ft. The asymmetric distribution will be directed away from the wall.

18. BLACKOUT PLATE

UB00 Not required **UB_ _** Blackout plate ¹

¹ Available on a per foot basis. May be required to prevent lighting up of duct work in loft type applications.

19. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low Voltage ³

¹ Not available in North America. ² Only available with DA01 dimming. ³ Only available with DA45 dimming.

20. DIMMING

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ² **DA45** PoE ³

¹ Not available with V3. ² Not available in North America. ³ Only available with V4.

21. CEILING TYPE

G0 Not required **G1** Grid ceiling ¹ **H1** Hard ceiling ²

The cost for the canopies, power cables, connections mechanisms and endcaps for the fixture has been added to these items.

¹ Combo kit provided includes installation to T-bar and through tile mount. ² Designed for drywall ceilings.

22. CEILING TRIM

RT0 Not required	RT1 Tegular T-bar ^{1 2}	RT2 Lay-In T-Bar ¹	RT3 Trimless ^{1 4}
RT4 Trim ^{1 4}			

¹ For Recessed luminaires only.

² Fixture designed to fit into a 9/16" or 15/16" standard tegular grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

³ Fixture designed to fit into a 9/16" or 15/16" standard grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

⁴ Fixture designed for drywall ceilings. All fixture metalwork can be either white or black.

23. SUSPENSION

HLA00 Not required	HLA03 3ft cable suspension	HLA06 6ft cable suspension	HLA09 9ft cable suspension
---------------------------	-----------------------------------	-----------------------------------	-----------------------------------

* Note: Special order available on lengths over 13ft and may be subject to longer lead times, consult factory.

24. FIXTURE FINISH

FA01 White - Textured	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA25 Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹	FA28 Wood grain - Dark Walnut ¹	FA30 Wood grain - White Oak ¹	FA44 Midnight Blue Metallic - Textured
FA45 Copper Metallic	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured	FA52 Champagne Metallic
FA53 Red Metallic - Textured			

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

25. CANOPY FINISH

CF00 Not required	CF01 White - Textured	CF02 Black Metallic - Textured	CF20 Silver Metallic - Textured
CF25 Gold Metallic - Textured	CF44 Midnight Blue Metallic - Textured	CF45 Copper Metallic	CF46 Charcoal Metallic - Textured
CF47 Bronze Metallic - Textured	CF52 Champagne Metallic	CF53 Red Metallic - Textured	

26. QUANTITY OF EMERGENCY SECTIONS

E0 Not required	E1 Emergency system - Integral ¹	E3 Emergency generated circuit - Remote ¹
------------------------	--	---

¹ Specify quantity of emergency sections or emergency generator circuits required based off total length of run. ¹ Available upon request, consult factory for details. Not available with 347V.

Note: a drawing will be required at time of ordering to determine the required location of the emergency sections or generator circuits.

27. CIRCUITS

CS1 Single circuit

CS2 Dual circuit ¹

28. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.