




BLOCK™

SHORT SPECIFICATION SHEET

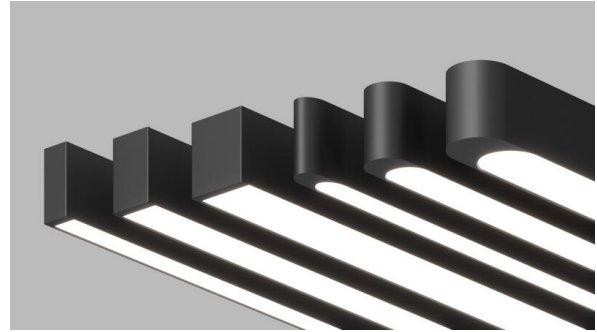

Fixture Type

Fixture Code

Quantities

1 HOW TO ORDER

1. LUMINAIRE TYPE

BLKP Pendant

BLKC Ceiling

BLKW Wall

BLKR Recessed

2. DIRECTION

DT1 Direct

DT2 Direct/Indirect

DT3 Indirect

One power cord for every 50 linear ft.

3. APERTURE

PW01 1.5"

PW02 2.5"

PW03 3.5"

4. RUN TYPE

TR01 Straight

TR02 L shape ¹

TR03 U shape ¹

TR04 Quad ¹

¹ Consult factory if L shape, U shape, or Quad is required with Wall mount. X and T junctions available, consult factory.* There is one power cable for a max overall length is 50ft, beyond that extra power cables are required. Consult factory.

5. LENGTH - A

The minimum length to order is 2ft and orders are to be in 2ft increments. For 6 inch increments, consult factory.

Examples:

4ft = SFA0400

10ft = SFA1000

50ft = SFA5000

SFA_ _ _ _

The minimum length to order is 2ft and orders are to be in 2ft increments. For 6 inch increments, consult factory.

Examples:

4ft = SFA0400

10ft = SFA1000

50ft = SFA5000

6. LENGTH - B

The minimum length to order is 2ft and orders are to be in 2ft increments. For 6 inch increments, consult factory.

Examples:

4ft = SFB0400

10ft = SFB1000

50ft = SFB5000

SFB_ _ _ _

The minimum length to order is 2ft and orders are to be in 2ft increments. For 6 inch increments, consult factory.

Examples:

4ft = SFB0400

10ft = SFB1000

50ft = SFB5000

7. LENGTH - C

The minimum length to order is 2ft and orders are to be in 2ft increments. For 6 inch increments, consult factory.

Examples:

4ft = SFC0400

10ft = SFC1000

50ft = SFC5000

SFC_ _ _ _

The minimum length to order is 2ft and orders are to be in 2ft increments. For 6 inch increments, consult factory.

Examples:

4ft = SFC0400

10ft = SFC1000

50ft = SFC5000

8. MAX LENGTH PER SECTION

SL02 2ft ¹	SL04 4ft	SL06 6ft	SL08 8ft
SL10 10ft	SL12 12ft		

¹ The dimming curves on the 2ft section length (SL02) will differ from the other sizes.

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

9. END CAP PROFILE

EP00 Not required	EP01 Flat	EP02 Curved
--------------------------	------------------	--------------------

10. LM/FT (DIRECT)

LPF000 Not required	LPF020 200 lm/ft	LPF040 400 lm/ft	LPF060 600 lm/ft
LPF080 800 lm/ft	LPF100 1000 lm/ft	LPF120 1200 lm/ft	LPF140 1400 lm/ft

¹ Not available with 1.5" aperture.

11. LM/FT (INDIRECT)

LPG000 Not required	LPG020 200 lm/ft	LPG040 400 lm/ft	LPG060 600 lm/ft
LPG080 800 lm/ft	LPG100 1000 lm/ft	LPG120 1200 lm/ft	LPG140 1400 lm/ft ¹
LPG165 1650 lm/ft ¹			

¹ Available with UD1 (clear diffuser) only.

12. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

13. CCT DIRECT

CTA00 Not required	CTA27 2700K	CTA30 3000K	CTA35 3500K
CTA40 4000K			

¹ Longer lead times may apply, consult factory.

* Tunable White and RGBW available, consult factory.

14. CCT INDIRECT

CTB00 Not required **CTB27** 2700K **CTB30** 3000K **CTB35** 3500K
CTB40 4000K

¹ Longer lead times may apply, consult factory.

* Tunable White and RGBW available, consult factory.

15. DIRECT DIFFUSER

DD0 Not required **DD1** Asymmetric ¹ **DD3** Diffused **DD5** Widespread
DS1 Asymmetric – Seamless ^{1 2} **DS3** Diffused – Seamless ² **DS5** Widespread – Seamless ²

¹ For straight run type (TR01), when standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

² Available with straight run type (TR01) only.

Fixed Length available upon request.

16. INDIRECT DIFFUSER

UD0 Not required **UD1** Batwing **UD2** Diffused **UD3** Asymmetric ¹

¹ Available up to 1200 lm/ft. For straight run type (TR01), when standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

17. ASYMMETRIC DIRECTION

ASD0 Not required **ASD1** Inward **ASD2** Outward

¹ Available up to 1200 lm/ft. The asymmetric distribution will be directed away from the wall.

18. UPLIGHT BLACKOUT PLATE

UB00 Not required **UB__** Blackout plate ¹

¹ Available on a per foot basis. May be required to prevent lighting up of duct work in loft type applications.

19. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low Voltage ³

¹ Not available in North America.

² Only available with DA01 dimming.

³ Only available with DA45 dimming.

20. DIMMING

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ² **DA45** PoE ³

¹ Not available with V3.

² Not available in North America.

³ Only available with V4.

21. CEILING TYPE

G0 Not required **G1** Grid ceiling ¹ **H1** Hard ceiling ²

The cost for the canopies, power cables, connections mechanisms and endcaps for the fixture has been added to these items.

¹ Combo kit provided includes installation to T-bar and through tile mount.

² Designed for drywall ceilings.

22. CEILING TRIM

RT0 Not required **RT1** Tegular T-bar ^{1 2} **RT2** Lay-In T-Bar ¹ **RT3** Trimless ^{1 4}
RT4 Trim ^{1 4}

¹ For Recessed luminaires only.

² Fixture designed to fit into a 9/16" or 15/16" standard tegular grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

³ Fixture designed to fit into a 9/16" or 15/16" standard grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

⁴ Fixture designed for drywall ceilings. All fixture metalwork can be either white or black.

23. SUSPENSION

HLA00 Not required **HLA03** 3ft cable suspension **HLA06** 6ft cable suspension **HLA09** 9ft cable suspension

* Note: Special order available on lengths over 13ft and may be subject to longer lead times, consult factory.

24. FIXTURE FINISH

FA01 White - Textured **FA02** Black Metallic - Textured **FA20** Silver Metallic - Textured **FA25** Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹ **FA28** Wood grain - Dark Walnut ¹ **FA44** Midnight Blue Metallic - Textured **FA45** Copper Metallic
FA46 Charcoal Metallic - Textured **FA47** Bronze Metallic - Textured **FA52** Champagne Metallic **FA53** Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

25. CANOPY FINISH

CF00 Not required **CF01** White - Textured **CF02** Black Metallic - Textured **CF20** Silver Metallic - Textured
CF25 Gold Metallic - Textured **CF44** Midnight Blue Metallic - Textured **CF45** Copper Metallic **CF46** Charcoal Metallic - Textured
CF47 Bronze Metallic - Textured **CF52** Champagne Metallic **CF53** Red Metallic - Textured

26. QUANTITY OF EMERGENCY SECTIONS

E0 Not required **E1** Emergency system - Integral ¹ **E3** Emergency generated circuit - Remote ¹

¹ Specify quantity of emergency sections or emergency generator circuits required based off total length of run. ¹ Available upon request, consult factory for details. Not available with 347V.

Note: a drawing will be required at time of ordering to determine the required location of the emergency sections or generator circuits.

27. CIRCUITS

CS1 Single circuit **CS2** Dual circuit ¹

28. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.