

BOGGLE™ - CEILING

Project Name:



Fixture Type:

Fixture Code:

Quantities:



BOGGLE™ - CEILING

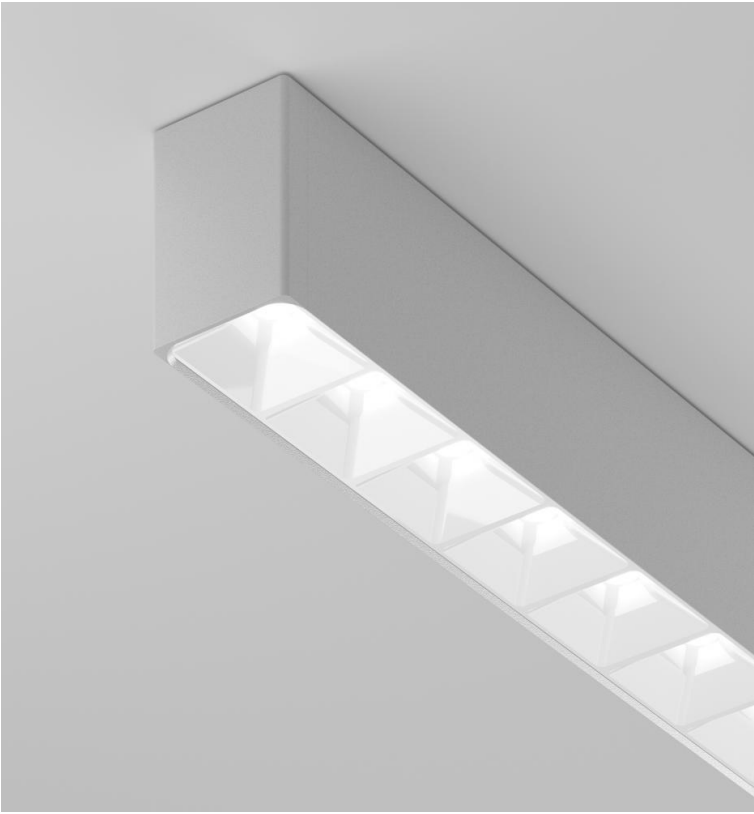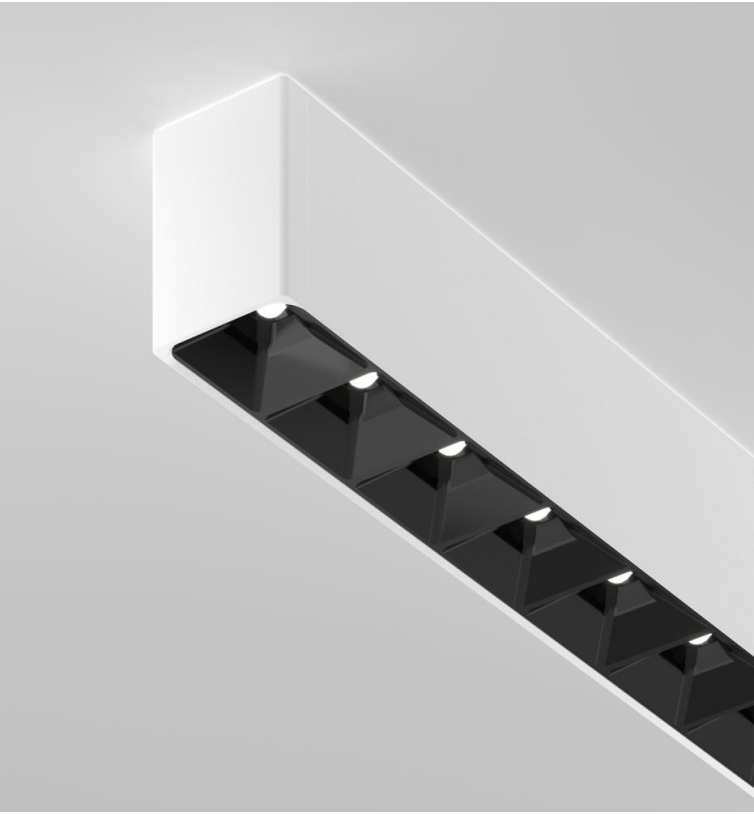

BOGGLE™ - CEILING

BOGGLE brings brains and brawn to professional lighting. Miniature downlights assemble into a linear cluster to provide optimum performance with superior optical definition, a 60° cutoff angle, better light efficiency and color rendering, and glare-reducing baffles. Improved color rendering balance, color temperature tunability, and a Unified Glare Rating below 9 make **BOGGLE** especially suitable for workspaces. The curved baffles in black or white present a tailored aesthetic that adds sophistication to the space.

GENERAL SPECIFICATION

Body

Aluminum.

Baffle

Black or White acrylic.

Tunable White

Provides the ability to change the color appearance of light from warm to neutral to cool, to adapt to the needs of the occupant throughout the course of the day.

Drivers

HPF electronic drivers for 120-277V, 347V, (EU 240V). The driver is integral to the fixture housing.

Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility.

The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

Reported L70 @25°C (77°F)

>108000 hrs @1000 lms/ft (3300 lm/m)

Approvals

Damp Rated.

Finish

Powder cpated.

Mechanical

Luminaires mount directly over J box (by others).

PoE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

Wood Slat Ceiling

For wood slat ceiling integration, consult factory.

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 90+

Estimated L70 @25°C (77°F)

>196000 hrs @1000 lms/ft (3300 lm/m)


Design

US Design Patent Pending.


MOUNTING & OPTICS



Ceiling Direct



Direct



Declare



PoE



Tunable White



BOGGLE™ - CEILING

HOW TO ORDER

A. LUMINAIRE

BGGC1C Direct

One power cord for every 50 linear feet.

B. LENGTH OF RUN

SFA _ _ _ _

Length of run is 2, 4, 6, 8, 10 or 12 feet only, not available as a continuous run.

C. LENGTH

SL02 2ft ¹	SL04 4ft	SL06 6ft	SL08 8ft
SL10 10ft	SL12 12ft		

¹ Consult factory if a 2ft length is required.

D. BAFFLE

BL1 White Baffle (Gloss)	BL2 Black Baffle (Gloss)	BL3 White Baffle (Matte)	BL4 Black Baffle (Matte)
---------------------------------	---------------------------------	---------------------------------	---------------------------------

Data shown based on max values. Consult Performance Data download for more details.

E. LM/FT

LPF020 200 lm/ft	LPF040 400 lm/ft	LPF060 600 lm/ft	LPF080 800 lm/ft
LPF100 1000 lm/ft			

F. CRI

CR90 CRI 90+

G. CCT

CTA30 3000K	CTA35 3500K	CTA40 4000K	CTA60 Tunable White ¹
--------------------	--------------------	--------------------	---

¹ Tunable White is available with 0-10V dimming options only. Consult factory for details.

H. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ Not available in North America.

² Only available with DA01 dimming.

³ Only available with DA45 dimming.

I. DIMMING

DA01 0-10V Dimming 1.0%	DA02 0-10V Dimming 0.1% ¹	DA20 DALI Dimming 0.1% ¹	DA21 DALI Dimming 1.0% ¹
DA30 DSI/switchDim ²	DA45 PoE ³		

¹ Not available with V3. DALI dimming (DA20 & DA21) not available with CTA60 (Tunable white).

² Not available in North America. Not available with CTA60 (Tunable white).

³ Only available with V4.

BOGGLE™ - CEILING

J. FINISH

- FA01** White - Textured
- FA02** Black Metallic - Textured
- FA20** Silver Metallic - Textured
- FA27** Wood grain - Light Cherry ¹
- FA28** Wood grain - Dark Walnut ¹

¹ Longer than normal lead times, consult factory.

K. EMERGENCY

- E0** Not required
- E1** Emergency system - Integral ¹
- E3** Emergency generated circuit - Remote ¹

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V. Available upon request, consult factory for details.

BOGGLE™ - CEILING

TECHNICAL DATA

LUMINAIRE


One power cord for every 50 linear feet.

Code	BGGC1C
Light Direction	Direct


FIXTURE FINISH




White - Textured



Black Metallic -
Textured



Silver Metallic -
Textured



Wood grain - Light Cherry
¹



Wood grain - Dark Walnut
¹

¹ Longer than normal lead times, consult factory.

APPROVALS



DAMP
LOCATION




IP20

BOGGLE™ - CEILING

PERFORMANCE DATA

DIRECT WHITE BAFFLE

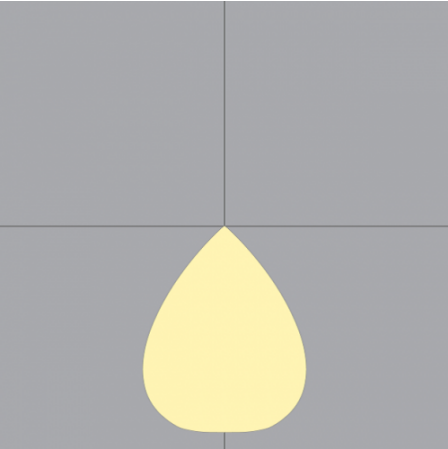


LUMEN/FT
1000
800
600
400
200

WATT/FT
11
9
6
4
2

LPW
90
92
96
101
107

DIRECT BLACK BAFFLE

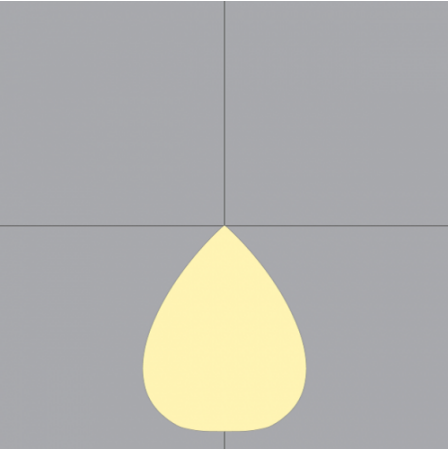



LUMEN/FT
1000
800
600
400
200

WATT/FT
11
9
6
4
2

LPW
85
87
91
96
101

BOGGLE™ - CEILING

DIMENSIONAL DIAGRAMS

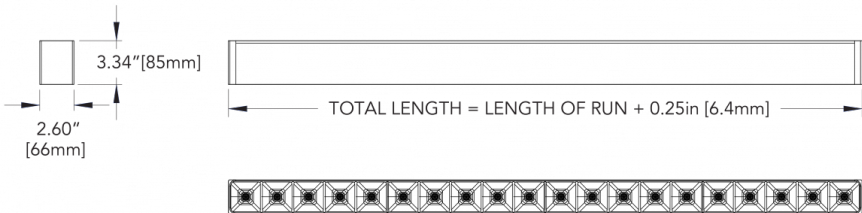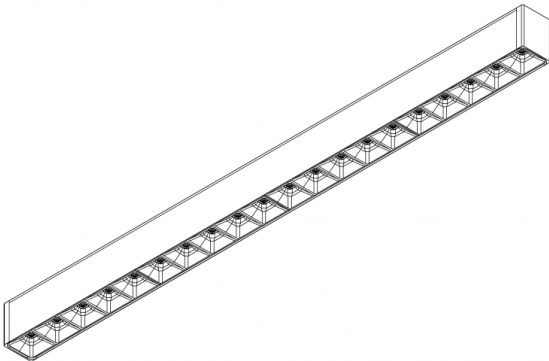

FIXTURE LENGTH	
2ft	24.25" [616mm]
4ft	48.25" [1225.6mm]
6ft	72.25" [1835.2mm]
8ft	96.25" [2444.8mm]
10ft	120.25" [3054.4mm]
12ft	144.25" [3664mm]