




BOGGLE™


FULL SPECIFICATION SHEET



FIXTURE TYPE



FIXTURE CODE



QUANTITIES


1 DESCRIPTION

BOGGLE brings brains and brawn to professional lighting. The recessed lenses assemble into a linear cluster to provide optimal performance with superior optical definition, a 60° cutoff angle, better light efficiency and color rendering, and glare-reducing louvers. Improved color rendering balance, color temperature tunability, and a Unified Glare Rating below 9 make **BOGGLE** especially suitable for workspaces. The louvers in black or white present a tailored aesthetic that adds sophistication to any space. The significantly enhanced visual comfort and Tunable White options make the **BOGGLE** ideal for human-centric spaces.


2 OPTICS & FEATURES



Recessed



Direct



Declare



PoE



Tunable White

3 APPROVALS



DAMP
LOCATION



IP20

4 GENERAL SPECIFICATION

BODY

Aluminum.

POE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

UGR

Unified Glare Rating <9

TUNABLE WHITE

Tunable White range from 2700K to 6500K is available; contact the factory for details.

ESTIMATED L70 @25°C (77°F)

>196000 hrs @1000 lms/ft (3300 lm/m)

APPROVALS

Damp Rated.

SEISMIC BRACING

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

LOUVER

Black or White acrylic. Gloss and Matte finishes.

DRIVERS

HPF electronic drivers for 120-277V, 347V, (EU 240V). The driver is integral to the fixture housing.

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

REPORTED L70 @25°C (77°F)

>108000 hrs @1000 lms/ft (3300 lm/m)

DELIVERED LUMENS

Delivered lumens & LPW based on 4000KCRI 90+

DESIGN

US Design Patent Pending.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS

CEILING TRIM FINISH



Not required



White -
Textured ¹



Black
Metallic
Textured ¹

¹ Required for RT4 only.

6 HOW TO ORDER

1. LUMINAIRE

BGGR1R Direct

One power cord for every 50 linear feet.

2. LENGTH OF RUN

Order in 2ft increments.

SFA_ _ _ _

3. MAX LENGTH PER SECTION

SL02 2ft ¹	SL04 4ft	SLO6 6ft	SL08 8ft
SL10 10ft	SL12 12ft		

¹ Not available with 200 lm/ft.

* You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4x 10ft segments. For special requirements, please contact sales@betacalco.com.

* Review the Linear Length Configurations document for each length of run.

4. LOUVER

BL1 White Glossy	BL2 Black Glossy	BL3 White Matte	BL4 Black Matte
-------------------------	-------------------------	------------------------	------------------------

All data shown based on max values, consult Performance Data download for more details.

5. LM/FT

LPF020 200 lm/ft	LPF040 400 lm/ft	LPF060 600 lm/ft	LPF080 800 lm/ft
LPF100 1000 lm/ft			

6. CRI

CR90 CRI 90+

7. CCT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
CTA60 Tunable White ¹			

¹ Consult factory.

8. VOLTAGE

V1 120/277V

V2 240V ¹

V3 347V ²

V4 Low Voltage ³

¹ Not available in North America. ² Only available with DA01 dimming. ³ Only available with DA45 dimming.

9. DIMMING

DA01 0–10V Dimming 1.0%

DA02 0–10V Dimming 0.1% ¹

DA20 DALI Dimming 0.1% ¹

DA21 DALI Dimming 1.0% ¹

DA30 DSI/switchDim ²

DA45 PoE ³

¹ Not available with V3. ² Not available in North America. Not available with CTA60 (Tunable white). ³ Only available with V4.

10. CEILING TYPE & TRIM

RT1 Tegular T-Bar ¹

RT2 Lay-In T-Bar ¹

RT3 Trimless ³

RT4 Trim ³

¹ Fixture designed to fit into a 9/16" or 15/16" standard tegular grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

² Fixture designed to fit into a 9/16" or 15/16" standard grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

³ Fixture designed for drywall ceilings.

11. CEILING TRIM FINISH

FA00 Not required

FA01 White – Textured ¹

FA02 Black Metallic Textured ¹

¹ Required for RT4 only.

12. EMERGENCY

E0 Not required

E1 Emergency system – Integral ¹ **E3** Emergency generated circuit – Remote ¹

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V. Available upon request, consult factory for details.

13. CHICAGO PLENUM

CP0 Not required

CP1 Chicago Plenum ¹



7 TECHNICAL DATA

LUMINAIRE

One power cord for every 50 linear feet.


Code **BGGR1R**
Light Direction Direct

8 PERFORMANCE DATA

DIRECT WHITE LOUVER	LUMEN/FT	WATT/FT	LPW	DIRECT BLACK LOUVER	LUMEN/FT	WATT/FT	LPW
	1000 800 600 400 200	11 9 6 4 2	90 92 96 101 107		1000 800 600 400 200	11 9 6 4 2	85 87 91 96 101


9 TM-30 DATA

CCT 2700K

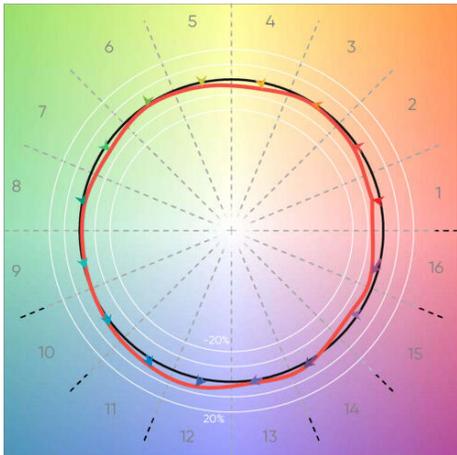


CRI (Ra)	93
CRI (R9)	61
TM30 Rf	91
TM30 Rg	98
Duv	-0.0022

CCT 3000K

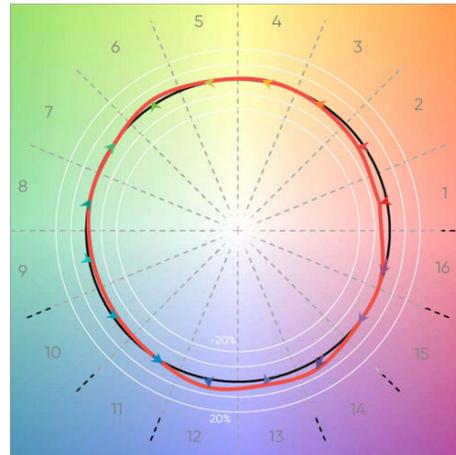


CRI (Ra)	92
CRI (R9)	58
TM30 Rf	92
TM30 Rg	100
Duv	-0.0003

CCT 3500K

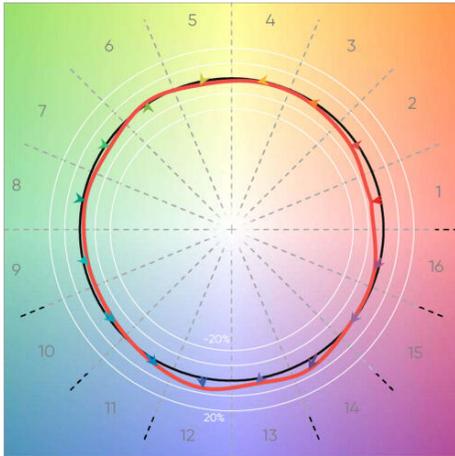

CRI (Ra)	91
CRI (R9)	53
TM30 Rf	90
TM30 Rg	99
Duv	-0.0007


CCT 4000K

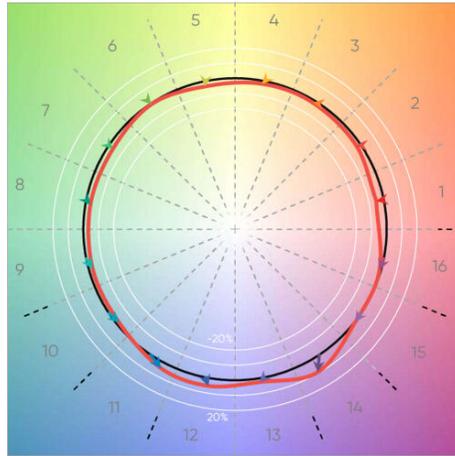


CRI (Ra)	93
CRI (R9)	64
TM30 Rf	90
TM30 Rg	98
Duv	0.0000

10 DIMENSIONAL DIAGRAMS



ISOMETRIC BOTTOM VIEW
HARD CEILING

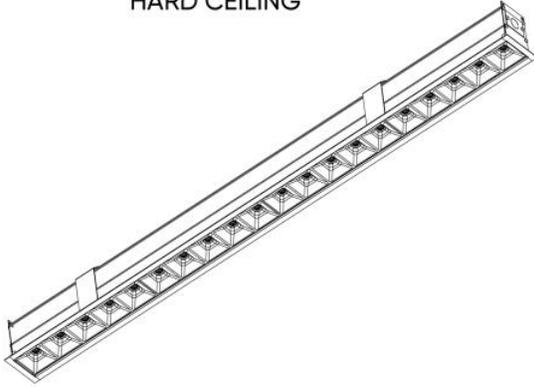

ISOMETRIC BOTTOM VIEW
GRID CEILING


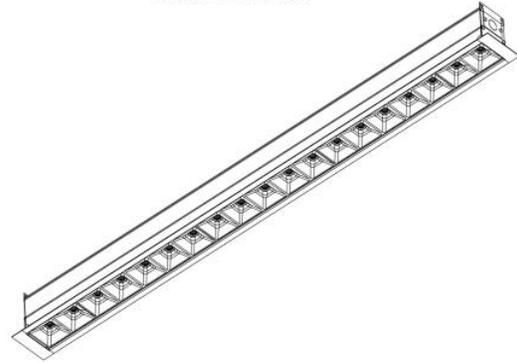


Grid Ceiling - Tegular Ceiling

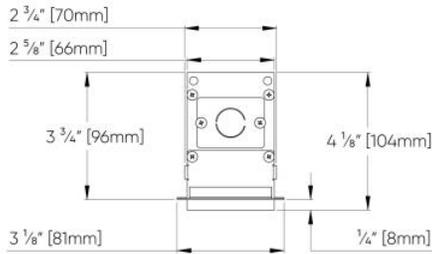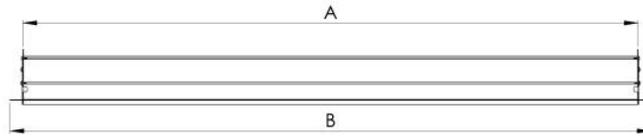


Max Length (Per Section)	A	B
2ft	21 3/4" [552mm]	23 5/8" [601mm]
4ft	45 3/4" [1162mm]	47 5/8" [1211mm]
6ft	69 3/4" [1772mm]	71 5/8" [1821mm]
8ft	93 3/4" [2381mm]	95 5/8" [2430mm]
10ft	117 3/4" [2991mm]	119 5/8" [3040mm]
12ft	141 3/4" [3600mm]	143 5/8" [3650mm]

Grid Ceiling - T Bar Ceiling

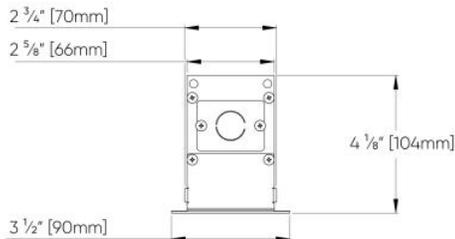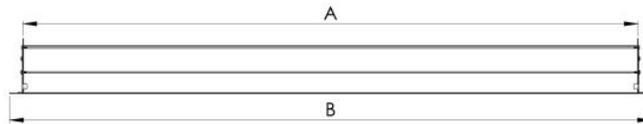

Max Length (Per Section)	A	B
2ft	21 3/4" [552mm]	23 3/4" [603mm]
4ft	45 3/4" [1162mm]	47 3/4" [1211mm]
6ft	69 3/4" [1772mm]	71 3/4" [1822mm]
8ft	93 3/4" [2381mm]	95 3/4" [2432mm]
10ft	117 3/4" [2991mm]	119 3/4" [3041mm]
12ft	141 3/4" [3600mm]	143 3/4" [3651mm]

Hard Ceiling – Trimless

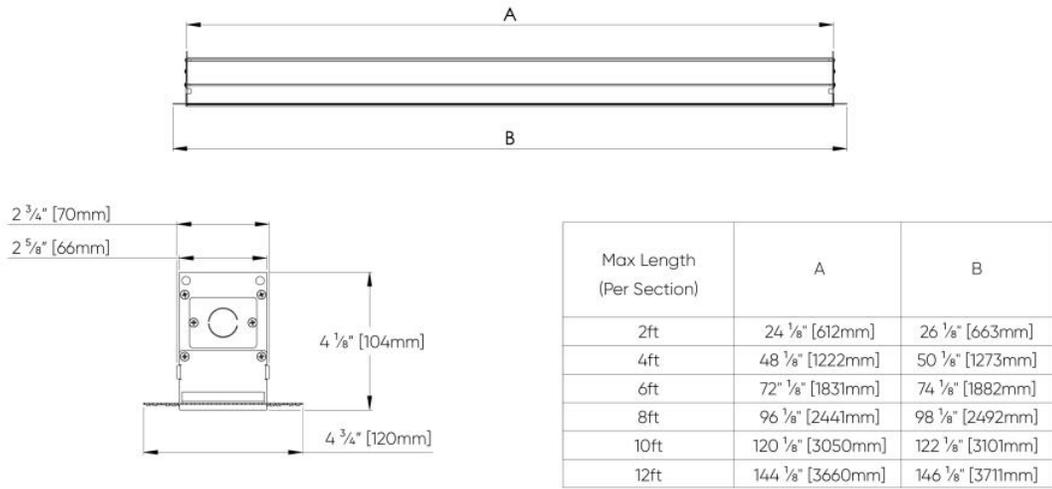

Hard Ceiling – Trim

