BOX™

FULL SPECIFICATION SHEET



FIXTURE TYPE	FIXTURE CODE	QUANTITIES

1 DESCRIPTION

BOX is a powerful downlight series with exceptional performance suitable for high ceiling applications. Equipped with high-efficiency reflectors optimized for beam definition and maximum center beam candela power, **BOX** delivers up to 12,900 lumens. Constructed of aluminum, the robust cuboid fits well with functionalist architecture. Available in single, double, and quad downlights that range from narrow, medium, and wide beam angles. With the options of Black, Silver Metallic, and White finishes, this fixture has a unique look for various spaces.

2 OPTICS & FEATURES



Suspended
Direct



Declare

3 APPROVALS

Intertek DAMP LOCATION F IP20

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

4 GENERAL SPECIFICATION

BODY AND TRIM
Steel and aluminum.

FINISH
Powder coated.

POWER CABLE
Silver braided.

MECHANICAL
Luminaires mount directly over J box (by others - North America only).

DRIVERS
Integral, HPF electronic drivers 120/277V (EU-240V), 0-10V, 10% dimming. The driver is integral to the fixture housing.

SENSORS
Consult factory regarding sensor compatibility.

REPORTED L70 @25°C (77°F)
>55,000 hrs

ESTIMATED L70 @25°C (77°F)
>201,000 hrs

DELIVERED LUMENS
Delivered lumens & LPW based on 3000K (min 80 CRI).

APPROVALS
Damp Rated.

SUSTAINABILITY
Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

5 HOW TO ORDER

LUMINAIRE

751011 1, 3218 lms
751012 2, 6436 lms
751014 4, 12872 lms

CCT

30 3000K (min 80 CRI)
35 3500K (min 80 CRI)
40 4000K (min 80 CRI)

REFLECTOR

NB Narrow Beam (14°)
MB Medium Beam (22°)
WB Wide Beam (38°)

FINISH

BL Black
MS Silver Metallic
WH White

DIMMING

D1 0-10V dimming (1%)
D2 0-10V Dimming (0.1%)
DA DALI dimming (0.1%)
DL DALI dimming (1%)
L1 Lutron L3DA3W Hi-Lume 1%, 3 Wire


6 TECHNICAL DATA


LUMINAIRE


Code	751011	751012	751014
Power (LED)	37W	74W	148W
Heads	1	2	4
Delivered lms	3218	6436	12872
LPW	84	84	84

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

7 DIMENSIONAL DIAGRAMS

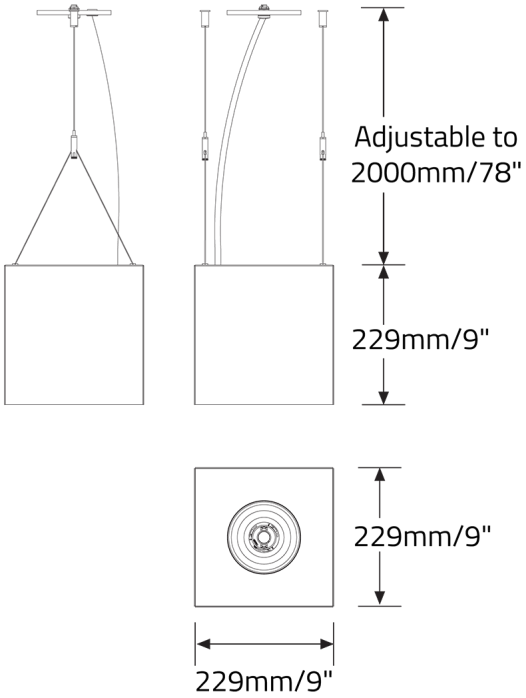

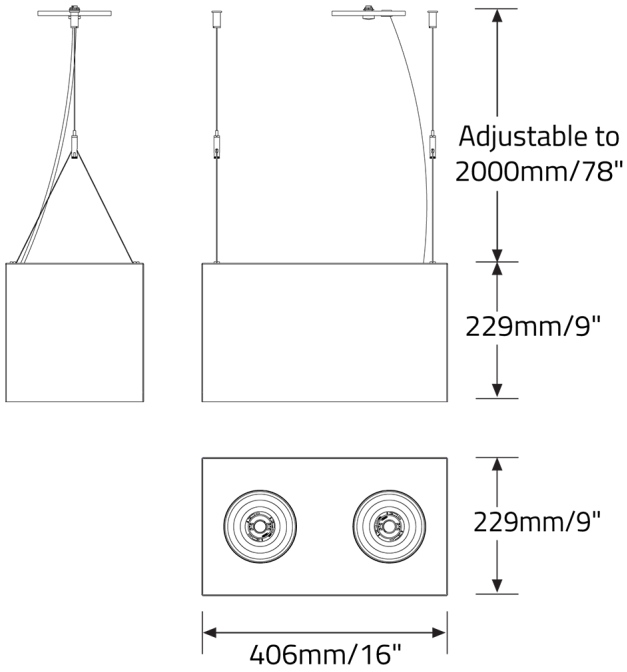

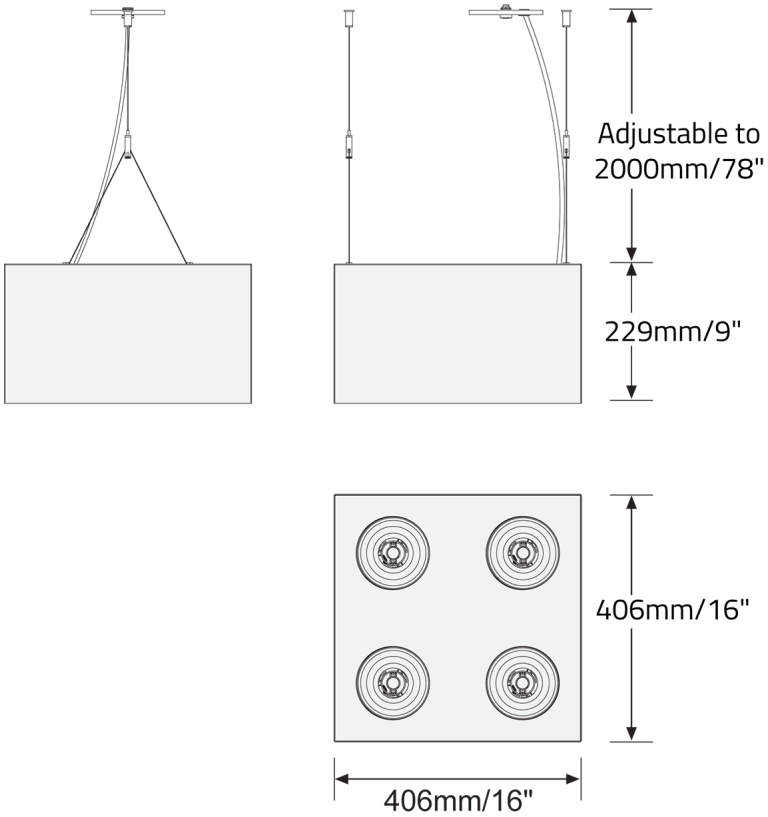

© 2026 Beta-Calco Inc. Specifications are subject to change without notice