

BOX™ - SUSPENDED

Project Name:


Fixture Type:

Fixture Code:

Quantities:



BOX™ - SUSPENDED

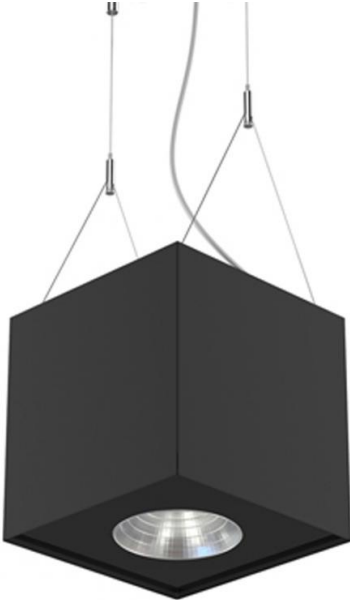

BOX™ - SUSPENDED

BOX is a powerful downlight series with exceptional performance suitable for high ceiling applications. Equipped with high-efficiency reflectors optimized for beam definition and maximum center beam candela power, BOX delivers up to 12,900 lumens. Constructed of aluminum, the robust cuboid fits well with functionalist architecture. Available in single, double, and quad downlights.

GENERAL SPECIFICATION

Body and trim

Steel and aluminum.

Power cable

Silver braided.

Drivers

Integral, HPF electronic drivers 120/277V (EU-240V), 0-10V, 10% dimming. The driver is integral to the fixture housing.

Reported L70 @25°C (77°F)

>55,000 hrs

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Finish

Powder coated.

Mechanical

Luminaires mount directly over J box (by others - North America only).

Sensors

Consult factory regarding sensor compatibility.

Estimated L70 @25°C (77°F)

>201,000 hrs

Approvals

Damp Rated.

MOUNTING & OPTICS



Suspended Direct



Declare

BOX™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

751011 1, 3218 lms

751012 2, 6436 lms

751014 4, 12872 lms

B. CCT

30 3000K (min 80 CRI)

35 3500K (min 80 CRI)

40 4000K (min 80 CRI)

C. REFLECTOR

NB Narrow Beam (14°)

MB Medium Beam (22°)

WB Wide Beam (38°)

D. FINISH

BL Black

MS Silver Metallic

WH White

E. DIMMING

D1 0-10V dimming (1%)

D2 0-10V Dimming (0.1%)

DA DALI dimming (0.1%)

DL DALI dimming (1%)

L1 Lutron L3DA3W Hi-Lume 1%, 3 Wire

BOX™ - SUSPENDED

TECHNICAL DATA

LUMINAIRE

Code	751011	751012	751014
Power (LED)	37W	74W	148W
Heads	1	2	4
Delivered lms	3218	6436	12872
LPW	84	84	84

APPROVALS



DAMP
LOCATION



IP20

BOX™ - SUSPENDED

DIMENSIONAL DIAGRAMS

