





# BRIDGE™

## SHORT SPECIFICATION SHEET

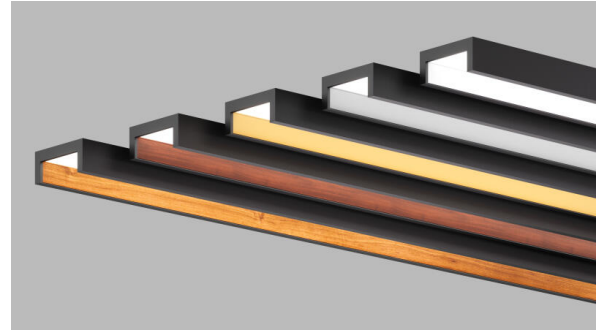

FIXTURE TYPE



FIXTURE CODE



QUANTITIES

### 1 HOW TO ORDER

<p><b>LUMINAIRE</b></p> <p><b>BRID1P</b> Direct  <b>BRID2P</b> Direct/Indirect</p> <p>One power cord for every 50 linear feet.</p>	<p><b>LENGTH OF RUN</b></p> <p>Length of run is 4, 6, 8, 10 or 12ft only, not available as a continuous run.</p> <p><b>SFA_ _ _ _</b></p>	<p><b>LENGTH</b></p> <p><b>SL04</b> 4ft  <b>SL06</b> 6ft  <b>SL08</b> 8ft  <b>SL10</b> 10ft  <b>SL12</b> 12ft</p>	<p><b>DISTRIBUTION</b></p> <p><b>DR0</b> Direct 100%  <b>DR1</b> Direct 25% / Indirect 75%  <b>DR3</b> Direct 60% / Indirect 40%</p>
<p><b>LUMENS/FT</b></p> <p><b>LPF040</b> 400 lm/ft <sup>1</sup>  <b>LPF060</b> 600 lm/ft <sup>1</sup>  <b>LPF080</b> 800 lm/ft <sup>1, 2, 3</sup>  <b>LPF100</b> 1000 lm/ft <sup>2, 3</sup>  <b>LPF120</b> 1200 lm/ft <sup>2, 3</sup>  <b>LPF140</b> 1400 lm/ft <sup>2, 3</sup></p> <p><sup>1</sup> 100% direct light <sup>2</sup> 25% direct light / 75% indirect light <sup>3</sup> 60% direct light / 40% indirect light</p>	<p><b>CRI</b></p> <p><b>CR80</b> CRI 80+  <b>CR90</b> CRI 90+</p>	<p><b>CCT</b></p> <p><b>CTA27</b> 2700K  <b>CTA30</b> 3000K  <b>CTA35</b> 3500K  <b>CTA40</b> 4000K</p>	<p><b>VOLTAGE</b></p> <p><b>V1</b> 120/277V  <b>V2</b> 240V <sup>1</sup>  <b>V3</b> 347V <sup>2</sup>  <b>V4</b> Low Voltage <sup>3</sup></p> <p><sup>1</sup> Not available in North America. <sup>2</sup> Only available with DA01 dimming. <sup>3</sup> Only available with DA45 dimming.</p>
<p><b>DIMMING</b></p> <p><b>DA01</b> 0-10V Dimming 1.0%  <b>DA02</b> 0-10V Dimming 0.1% <sup>1</sup>  <b>DA20</b> DALI Dimming 0.1% <sup>1</sup>  <b>DA21</b> DALI Dimming 1.0% <sup>1</sup>  <b>DA30</b> DSI/switchDim <sup>2</sup>  <b>DA45</b> PoE <sup>3</sup></p> <p><sup>1</sup> Not available with V3. <sup>2</sup> Not available in North America. <sup>3</sup> Only available with V4.</p>	<p><b>CEILING TYPE</b></p> <p><b>H1</b> Hard ceiling <sup>2</sup>  <b>G1</b> Grid ceiling <sup>1</sup></p> <p>The cost for the canopies, power cables, connections mechanisms and endcaps for the fixture has been added to these items.</p> <p><sup>1</sup> Combo kit provided includes installation to T-bar and through tile mount. Available with remote box only. <sup>2</sup> Designed for drywall ceilings.</p>	<p><b>DRIVER LOCATION</b></p> <p><b>DT01</b> Recessed ceiling box with integrated canopy <sup>1</sup>  <b>DT02</b> Remote Box <sup>2</sup></p> <p><sup>1</sup> Recessed ceiling box with integrated canopy is not available with 12ft and 1400 lm/ft. <sup>2</sup> Grid ceiling available with Remote Box only.</p>	

<p><b>SUSPENSION</b></p> <p><b>HLA03</b> 3ft cable suspension  <b>HLA06</b> 6ft cable suspension  <b>HLA09</b> 9ft cable suspension</p> <p>* Note: Special order available on lengths over 9ft and may be subject to longer lead times, consult factory.</p>	<p><b>FIXTURE FINISH</b></p> <p><b>FA01</b> White - Textured  <b>FA02</b> Black Metallic - Textured  <b>FA20</b> Silver Metallic - Textured</p>	<p><b>INSIDE TRIM FINISH</b></p> <p><b>FB01</b> White - Textured  <b>FB20</b> Silver Metallic Textured  <b>FB27</b> Wood grain - Light Cherry <sup>1</sup>  <b>FB28</b> Wood grain - Dark Walnut <sup>1</sup>  <b>FB30</b> Wood grain - White Oak <sup>1</sup>  <b>FB59</b> Gold Anodized</p> <p><sup>1</sup> Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.</p>	<p><b>CANOPY FINISH</b></p> <p><b>CF01</b> White - Textured  <b>CF02</b> Black Metallic - Textured  <b>CF20</b> Silver Metallic - Textured</p>
<p><b>EMERGENCY (REMOTE ONLY)</b></p> <p><b>E0</b> Not required  <b>E2</b> Emergency system - Remote</p>	<p><b>SENSORS</b></p> <p>Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.</p>		