
BRIDGE™

SHORT SPECIFICATION SHEET

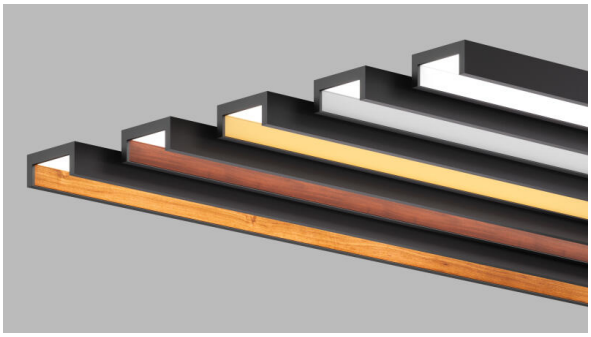

FIXTURE TYPE	FIXTURE CODE	QUANTITIES

1 HOW TO ORDER

LUMINAIRE

BRID1P Direct

BRID2P Direct/Indirect

One power cord for every 50 linear feet.

LENGTH OF RUN

Length of run is 4, 6, 8, 10 or 12ft only, not available as a continuous run.

SFA_ _ _ _

LENGTH

SL04 4ft

SL06 6ft

SL08 8ft

SL10 10ft

SL12 12ft

DISTRIBUTION

DR0 Direct 100%

DR1 Direct 25% / Indirect 75%

DR3 Direct 60% / Indirect 40%

LUMENS/FT

LPF040 400 lm/ft [1]

LPF060 600 lm/ft [1]

LPF080 800 lm/ft [1] [2] [3]

LPF100 1000 lm/ft [2] [3]

LPF120 1200 lm/ft [2] [3]

LPF140 1400 lm/ft [2] [3]

[1] 100% direct light [2] 25% direct light / 75% indirect light [3] 60% direct light / 40% indirect light

CRI

CR80 CRI 80+

CR90 CRI 90+

CCT

CTA27 2700K

CTA30 3000K

CTA35 3500K

CTA40 4000K

VOLTAGE

V1 120/277V

V2 240V [1]

V3 347V [2]

V4 Low Voltage [3]

[1] Not available in North America. [2] Only available with DA01 dimming. [3] Only available with DA45 dimming.

DIMMING

DA01 0-10V Dimming 1.0%

DA02 0-10V Dimming 0.1% [1]

DA20 DALI Dimming 0.1% [1]

DA21 DALI Dimming 1.0% [1]

DA30 DSI/switchDim [2]

DA45 PoE [3]

[1] Not available with V3. [2] Not available in North America. [3] Only available with V4.

CEILING TYPE

H1 Hard ceiling [2]

G1 Grid ceiling [1]

The cost for the canopies, power cables, connections mechanisms and endcaps for the fixture has been added to these items.

[1] Combo kit provided includes installation to T-bar and through tile mount. Available with remote box only. [2] Designed for drywall ceilings.

DRIVER LOCATION

DT01 Recessed ceiling box with integrated canopy [1]

DT02 Remote Box [2]

[1] Recessed ceiling box with integrated canopy is not available with 12ft and 1400 lm/ft. [2] Grid ceiling available with Remote Box only.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

SUSPENSION

HLA03 3ft cable suspension
HLA06 6ft cable suspension
HLA09 9ft cable suspension

* Note: Special order available on lengths over 9ft and may be subject to longer lead times, consult factory.

FIXTURE FINISH

FA01 White - Textured
FA02 Black Metallic - Textured
FA20 Silver Metallic - Textured

INSIDE TRIM FINISH

FB01 White - Textured
FB20 Silver Metallic Textured
FB27 Wood grain - Light Cherry [1]
FB28 Wood grain - Dark Walnut [1]
FB30 Wood grain - White Oak [1]
FB59 Gold Anodized

[1] Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

CANOPY FINISH

CF01 White - Textured
CF02 Black Metallic - Textured
CF20 Silver Metallic - Textured

EMERGENCY (REMOTE ONLY)

E0 Not required
E2 Emergency system - Remote [1] [2]

[1] Specify quantity of emergency sections or emergency generator circuits required based off total length of run. Not available with 347V.

[2] For North America, the minimum emergency system wattage is 7.5W. Refer to the fixture's lumens per watt to estimate emergency light output. The emergency system typically powers only a portion of the fixture, depending on the fixture configuration and number of drivers. Consult factory for emergency system configuration and illuminated section details.
For Europe, the emergency system wattage and configuration may vary. Consult factory for details.

Note: A drawing will be required at the time of ordering to determine the required location of the emergency sections.

SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice