

# BUBBLE™ - 2800

Project Name:

Fixture Type:

Fixture Code:

Quantities:



# BUBBLE™ - 2800

## GENERAL SPECIFICATION

### Housing

Round metal frame consisting of modules combined together for electrical and mechanical connections. Bubble comes in the following diameter of 2800mm (110.0").

### Power cables

Luminaires supplied with 7.8m/20' of cable. Cables can be extended to a maximum overall distance of 20m/64'. Custom cable lengths can be supplied to special order.

### Mechanical

Luminaires mount directly over a junction box.

### L70 @25°C (77°F)

>50,000 hrs.

### Diffusers

Injection molded, UV stabilized, opal polycarbonate. Diffusers are sectional with subtle but visible seams. Bubble 2800, 16 diffusers.

### Drivers

Luminaires supplied with HPF electronic drivers, 120/277V. 0-10V dimming standard.


### Finish

White RAL 9003.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

## MOUNTING & OPTICS



Suspended 2 sides



General Diffuse

# BUBBLE™ - 2800

## HOW TO ORDER

### A. LUMINAIRE

**BCBBWH886** BCBBWH886

### B. CCT

**30** 3000K (min 80 CRI)

**35** 3500K (min 80 CRI)

**40** 4000K (min 80 CRI)

### C. POWER SUPPLY

**IPS** Integral Power Supply

**RPS** Remote Power Supply

### D. SUSPENSION

**LP** Low Profile Pd (8 suspension cables connected to the central joint)

**AP** Adjust. Pd (8 cables connected to central joint & 4 adjust. cables)

**CM** Ceiling Mount (8 suspension cables L=2000mm/79")

---

LP (Low Profile Pd) option not available with IPS (Integral Power Supply)

### E. LUMEN OUTPUT

**L0** 100% of standard output

**L1** Lumen & wattage reduction to approximately 75% of standard output

**L2** Lumen & wattage reduction to approximately 50% of standard output

**L3** Lumen & wattage reduction to approximately 25% of standard output

---

Custom reduction percentages available upon request.

### F. ACCESSORIES

**150A031VE** Umbrella tool for assembly  
(Retains structural integrity during the installation process)

---

1. One required per order



# BUBBLE™ - 2800

## TECHNICAL DATA

### LUMINAIRE

<b>Code</b>	<b>BCBBWH886</b>
<b>Diameter</b>	110"
<b>Power (LED)</b>	564W
<b>Delivered lms</b>	37282
<b>LPW</b>	66
<b>Weight</b>	165.3lb

---


### APPROVALS




IP20

# BUBBLE™ - 2800


## DIMENSIONAL DIAGRAMS

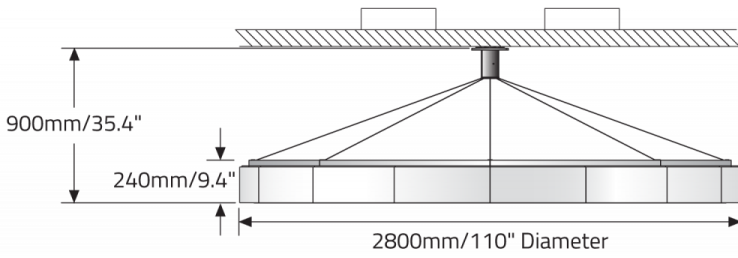


**Low Profile Pendant with Remote Power Supply.**

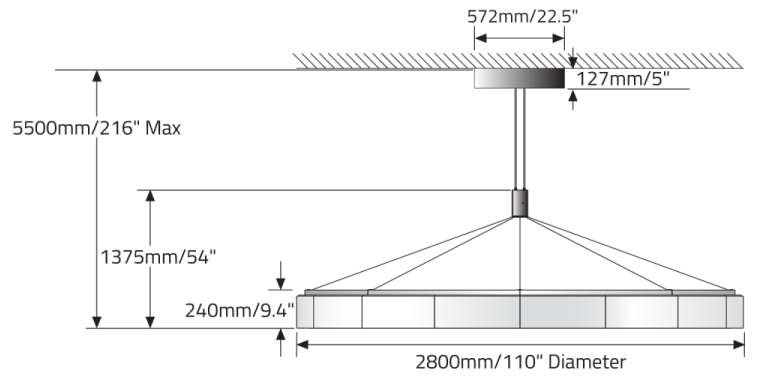


**Adjustable Pendant with IPS option**

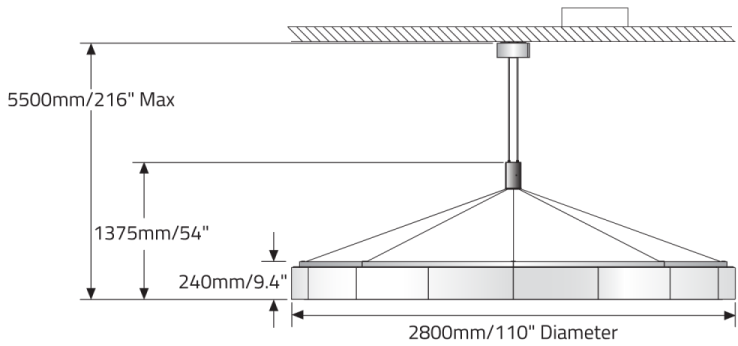


**Adjustable Pendant with RPS option**

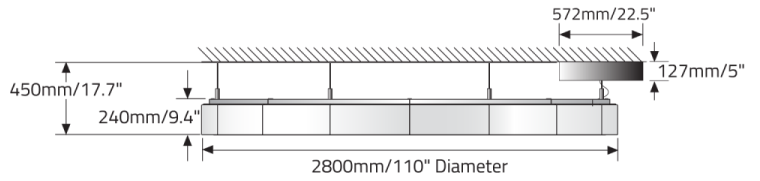

**Ceiling Mounting with IPS option**

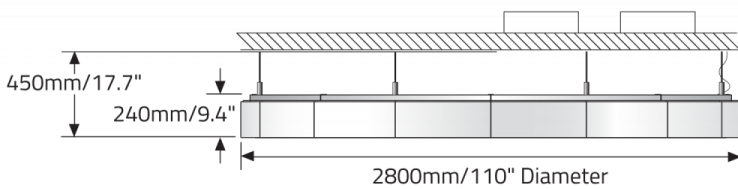


**Ceiling Mounting with RPS option**

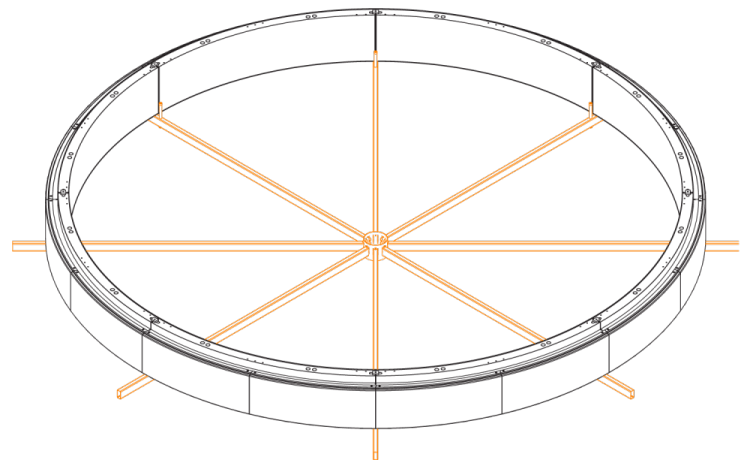


**Umbrella tool for assembly**



**BUBBLE™ - 2800**

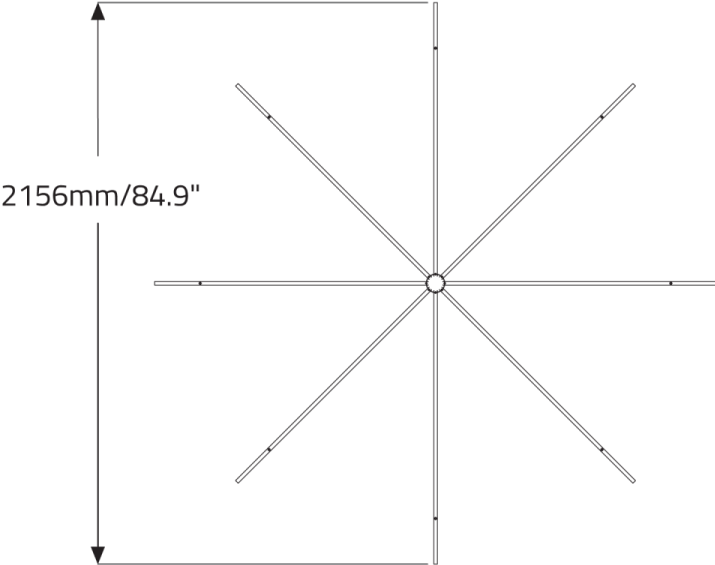

**150A031VE UMBRELLA**

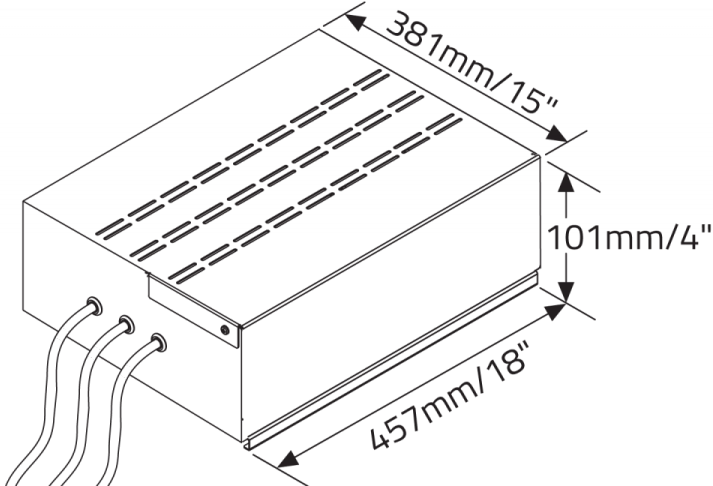

**RPS Remote power supply box  
(2 required for LP and CM)**