

# BUBBLE™ - 2800

Project Name:

Fixture Type:

Fixture Code:

Quantities:



[betacalco.com](http://betacalco.com) | +1 416-531-9942 | [sales@betacalco.com](mailto:sales@betacalco.com)

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

Jan 19, 2026

Page 1 of 6

# BUBBLE™ - 2800

## GENERAL SPECIFICATION

### Housing

Round metal frame consisting of modules combined together for electrical and mechanical connections. Bubble comes in the following diameter of 2800mm (110.0").

### Power cables

Luminaires supplied with 7.8m/20' of cable. Cables can be extended to a maximum overall distance of 20m/64'. Custom cable lengths can be supplied to special order.

### Mechanical

Luminaires mount directly over a junction box.

### L70 @25°C (77°F)

>50,000 hrs.

### Lenses

Injection molded, UV stabilized, opal polycarbonate. Lenses are sectional with subtle but visible seams. Bubble 2800, 16 lenses.

### Drivers

Luminaires supplied with HPF electronic drivers, 120/277V. 0-10V dimming standard.


### Finish

White RAL 9003.


### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

## OPTICS & FEATURES



Suspended 2 sides



General Diffuse



# BUBBLE™ - 2800

## HOW TO ORDER

### A. LUMINAIRE

**BCBBWH886** BCBBWH886

### B. CCT

**30** 3000K (min 80 CRI)

**35** 3500K (min 80 CRI)

**40** 4000K (min 80 CRI)

### C. POWER SUPPLY

**IPS** Integral Power Supply

**RPS** Remote Power Supply

### D. SUSPENSION

**LP** Low Profile Pd (8 suspension cables connected to the central joint)

**AP** Adjust. Pd (8 cables connected to central joint & 4 adjust. cables)

**CM** Ceiling Mount (8 suspension cables L=2000mm/79")

LP (Low Profile Pd) option not available with IPS (Integral Power Supply)

### E. LUMEN OUTPUT

**L0** 100% of standard output

**L1** Lumen & wattage reduction to approximately 75% of standard output

**L2** Lumen & wattage reduction to approximately 50% of standard output

**L3** Lumen & wattage reduction to approximately 25% of standard output

Custom reduction percentages available upon request.

### F. ACCESSORIES

**150A031VE** Umbrella tool for assembly  
(Retains structural integrity during the installation process)

1. One required per order



# BUBBLE™ - 2800

## TECHNICAL DATA

### LUMINAIRE

**Code** BCBBWH886

**Diameter** 110"

**Power (LED)** 564W

**Delivered lms** 37282

**LPW** 66


**Weight** 165.3lb

## APPROVALS




# BUBBLE™ - 2800


## DIMENSIONAL DIAGRAMS

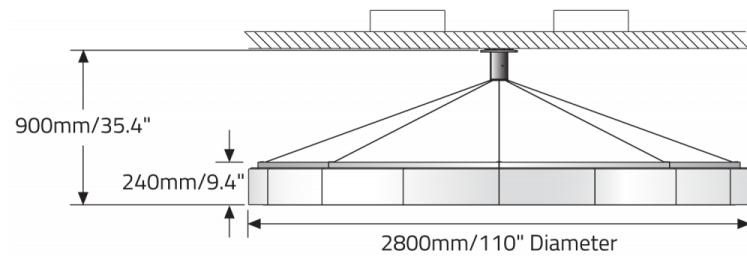


**Low Profile Pendant with Remote Power Supply.**

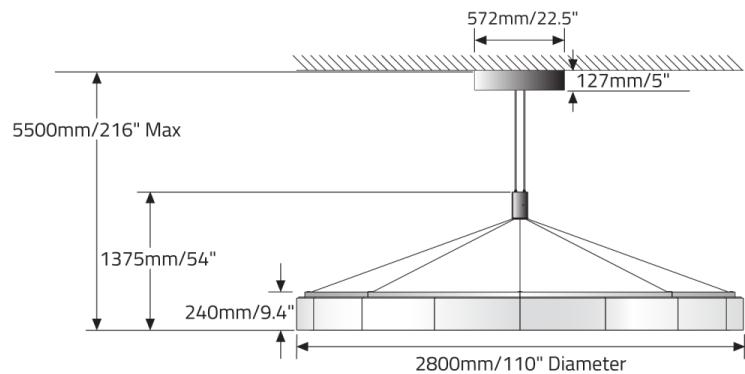


**Adjustable Pendant with IPS option**

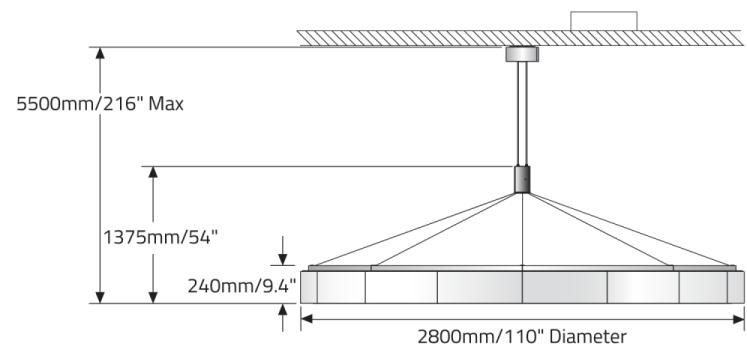


**Adjustable Pendant with RPS option**

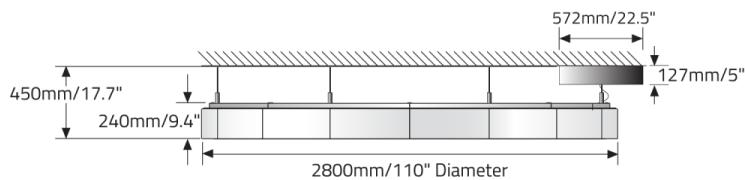

**Ceiling Mounting with IPS option**

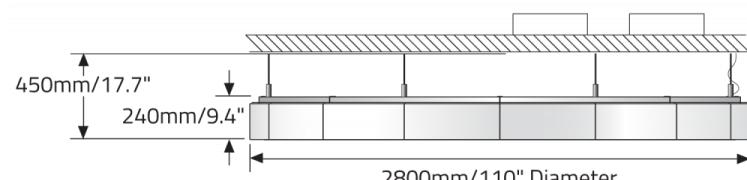


**Ceiling Mounting with RPS option**

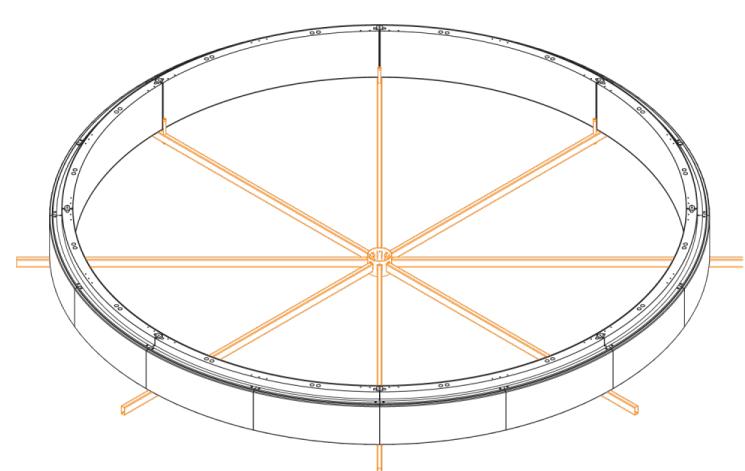


**Umbrella tool for assembly**



## BUBBLE™ - 2800

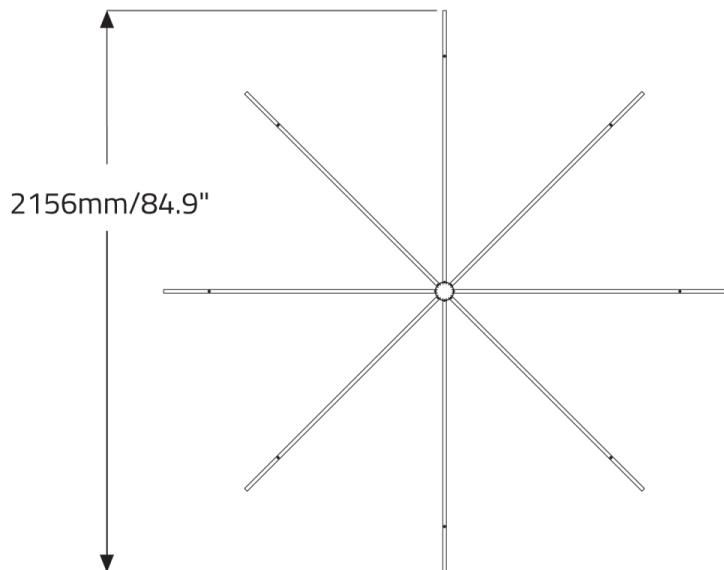

**150A031VE UMBRELLA**

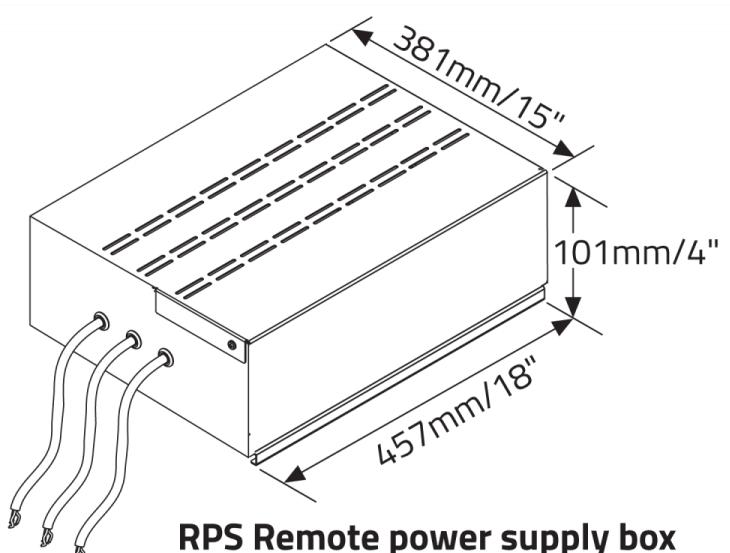

**RPS Remote power supply box  
(2 required for LP and CM)**