


BUBBLE 3D RGB™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:

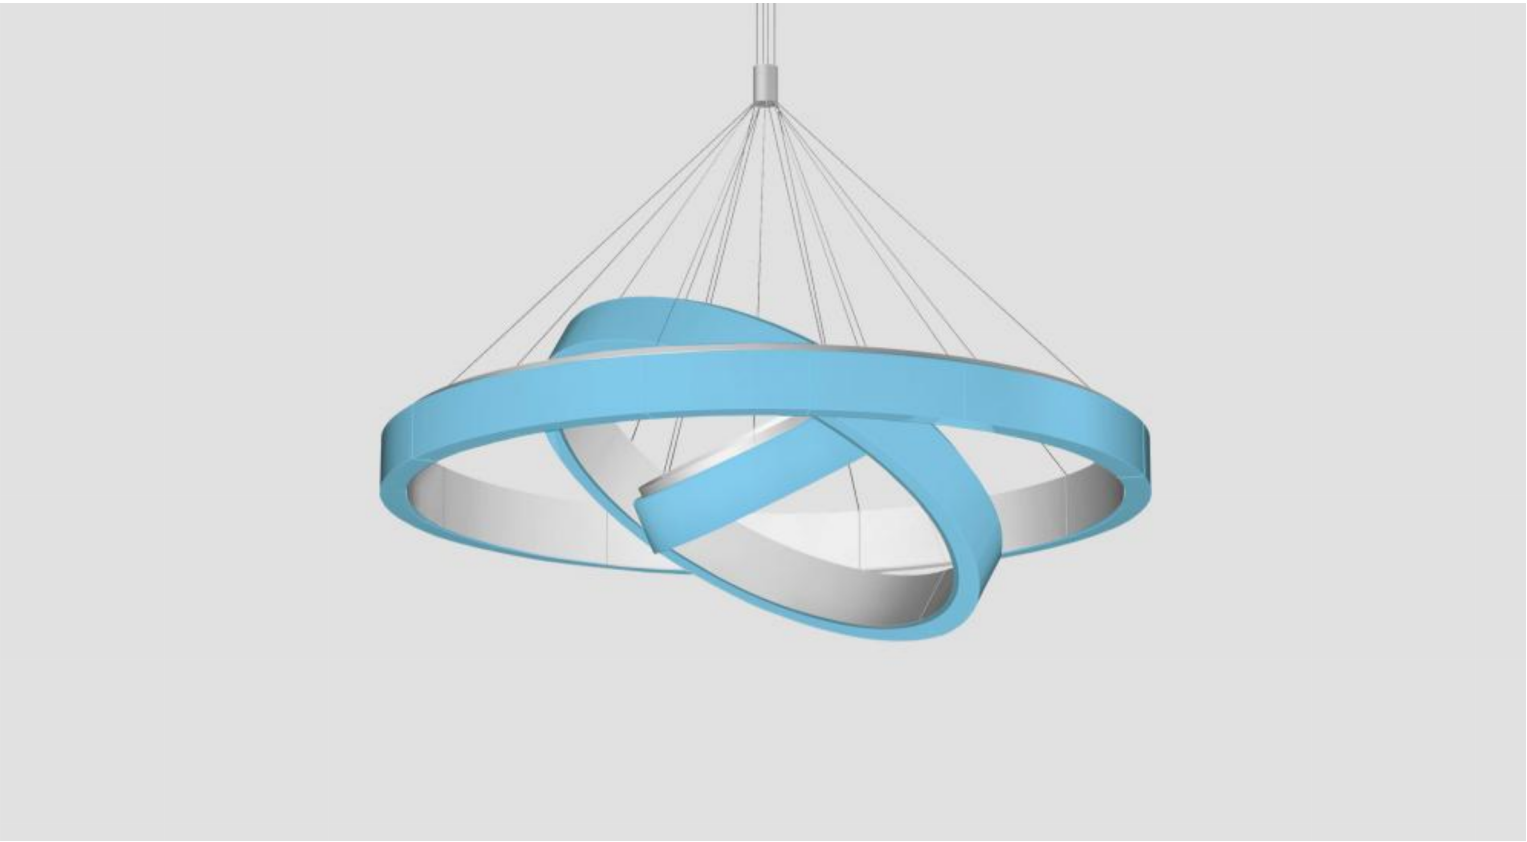

BUBBLE 3D RGB™ - SUSPENDED

GENERAL SPECIFICATION

Housing

Round metal frame consisting of modules combined together for electrical and mechanical connection. Bubble 3D supplied in the following diameters: 1000mm (39.4"), 1800mm (70.9") and 2800mm (110.0").

Drivers/power supplies

Luminaires supplied with remote electronic drivers/DMX interfaces, 120/277V. Connection of the power cords (approx. 12) to the remote drivers by others.

RGB control

Luminaires require a DMX controller by others.

Finish

White RAL 9003.

Diffusers

Injection molded, UV stabilized, opal polycarbonate. Diffusers are sectional with subtle but visible seams Bubble 1000, 3 diffusers; Bubble 1800, 8 diffusers and Bubble 2800, 16 diffusers.

Power cables

Luminaires, supplied with 13.5m/35' of cable. Cables can be extended to a maximum overall distance of 20m/64'.

Custom cable lengths can be supplied to special order.

Mechanical

Luminaires mount directly over a junction box.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES



Suspended Direct

BUBBLE 3D RGB™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

BC3DRGBP BC3DRGBP **BC3DRGBLP** BC3DRGBLP

B. ACCESSORIES

150A031VE Umbrella tool for assembly/installation of Bubble 110" only. Retains structural integrity during the installation process

- 1. One required per order

TECHNICAL DATA

LUMINAIRE


Code	BC3DRGBP	BC3DRGBLP
Type	Adjustable	Low Profile
Power (LED)	RGB 264W+156W+80W	RGB 264W+156W+80W
Weight	286.6lb	286.6lb

APPROVALS




BUBBLE 3D RGB™ - SUSPENDED


DIMENSIONAL DIAGRAMS

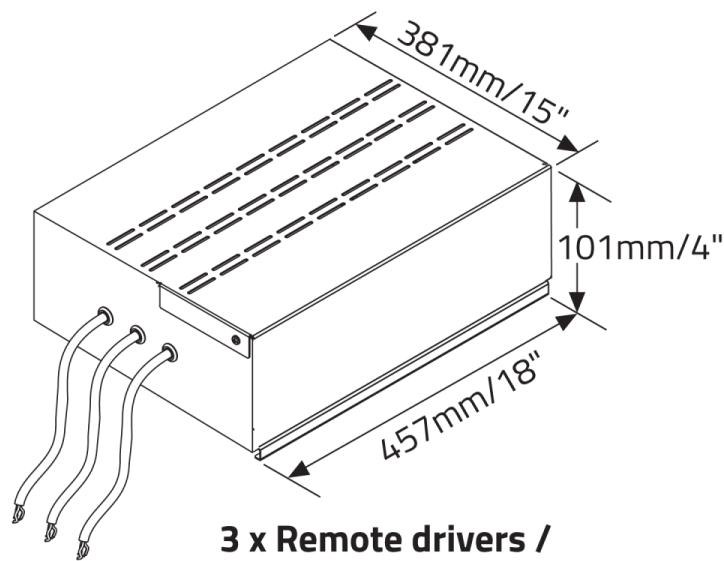


3 x Remote drivers / power supply included

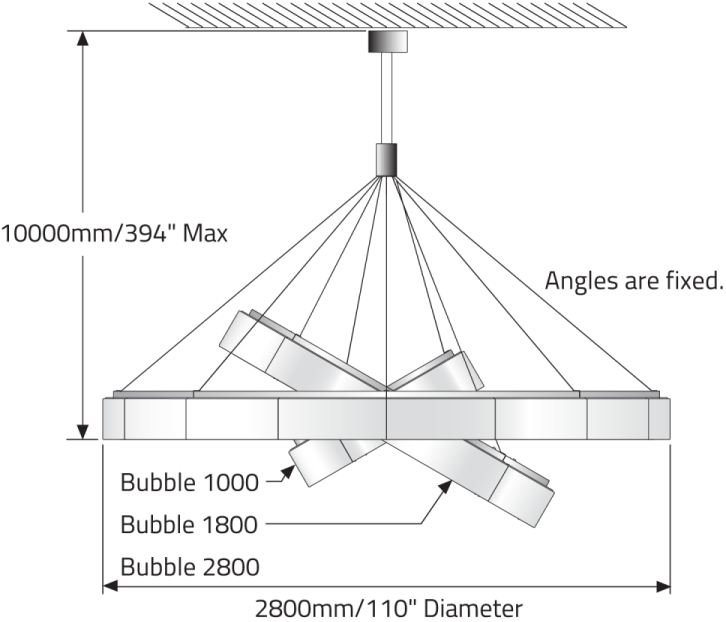

Adjustable Pendant option

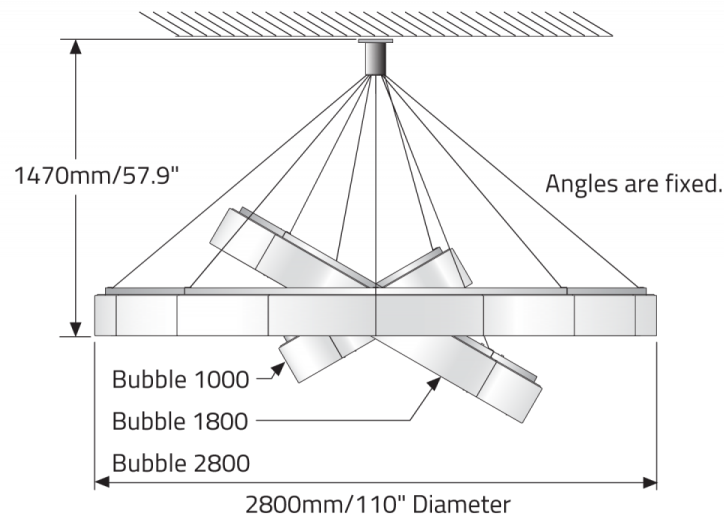

Low Profile Pendant option

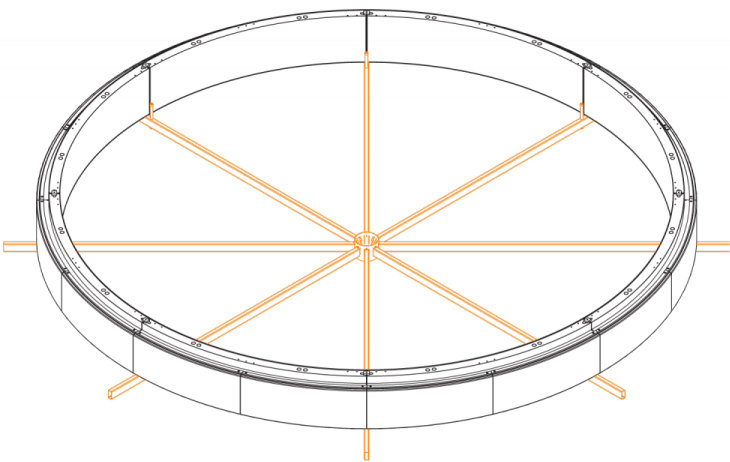

Umbrella tool for assembly

BUBBLE 3D RGB™ - SUSPENDED

