Project Name:

Fixture Type:

Fixture Code:

Quantities:



## **GENERAL SPECIFICATION**

#### Housing

Round metal frame consisting of modules combined together for electrical and mechanical connection. Bubble 3D supplied in the following diameters: 1000mm (39.4"), 1800mm (70.9") and 2800mm (110.0").

### Drivers/power supplies

Luminaires supplied with remote electronic drivers/DMX interfaces, 120/277V. Connection of the power cords (approx. 12) to the remote drivers by others.

### **RGB** control

Luminaires require a DMX controller by others.

#### Finish

White RAL 9003.

### **OPTICS & FEATURES**



Suspended Direct

#### Lenses

Injection molded, UV stabilized, opal polycarbonate. Lenses are sectional with subtle but visible seams Bubble 1000, 3 lenses; Bubble 1800, 8 lenses and Bubble 2800, 16 lenses.

### **Power cables**

Luminaires, supplied with 13.5m/35' of cable. Cables can be extended to a maximum overall distance of 20m/64'.

Custom cable lengths can be supplied to special order.

### Mechanical

Luminaires mount directly over a junction box.

### **Delivered Lumens**

Delivered lumens & LPW based on 3000K (min 80 CRI).

## **HOW TO ORDER**

### A. LUMINAIRE

**BC3DRGBP** BC3DRGBP **BC3DRGBLP** BC3DRGBLP

# **B. ACCESSORIES**

150A031VE Umbrella tool for assembly/installation of Bubble 110" only. Retains structural integrity during the installation process

1. One required per order

## **TECHNICAL DATA**

## **LUMINAIRE**

**BC3DRGBP BC3DRGBLP** Code Type Adjustable Low Profile Power (LED) RGB RGB

264W+156W+80W 264W+156W+80W

286.6lb 286.6lb Weight

# **APPROVALS**














# **DIMENSIONAL DIAGRAMS**

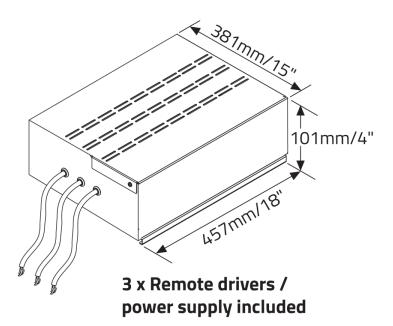


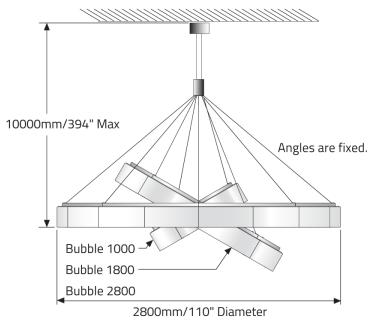

# **Adjustable Pendant option**

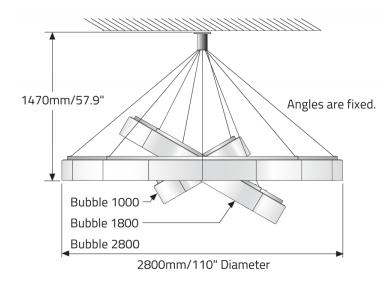

**Low Profile Pendant option** 

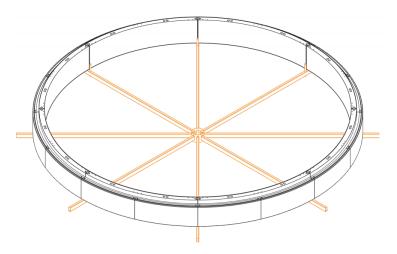

Umbrella tool for assembly

