


BUBBLE 3D RGB™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:

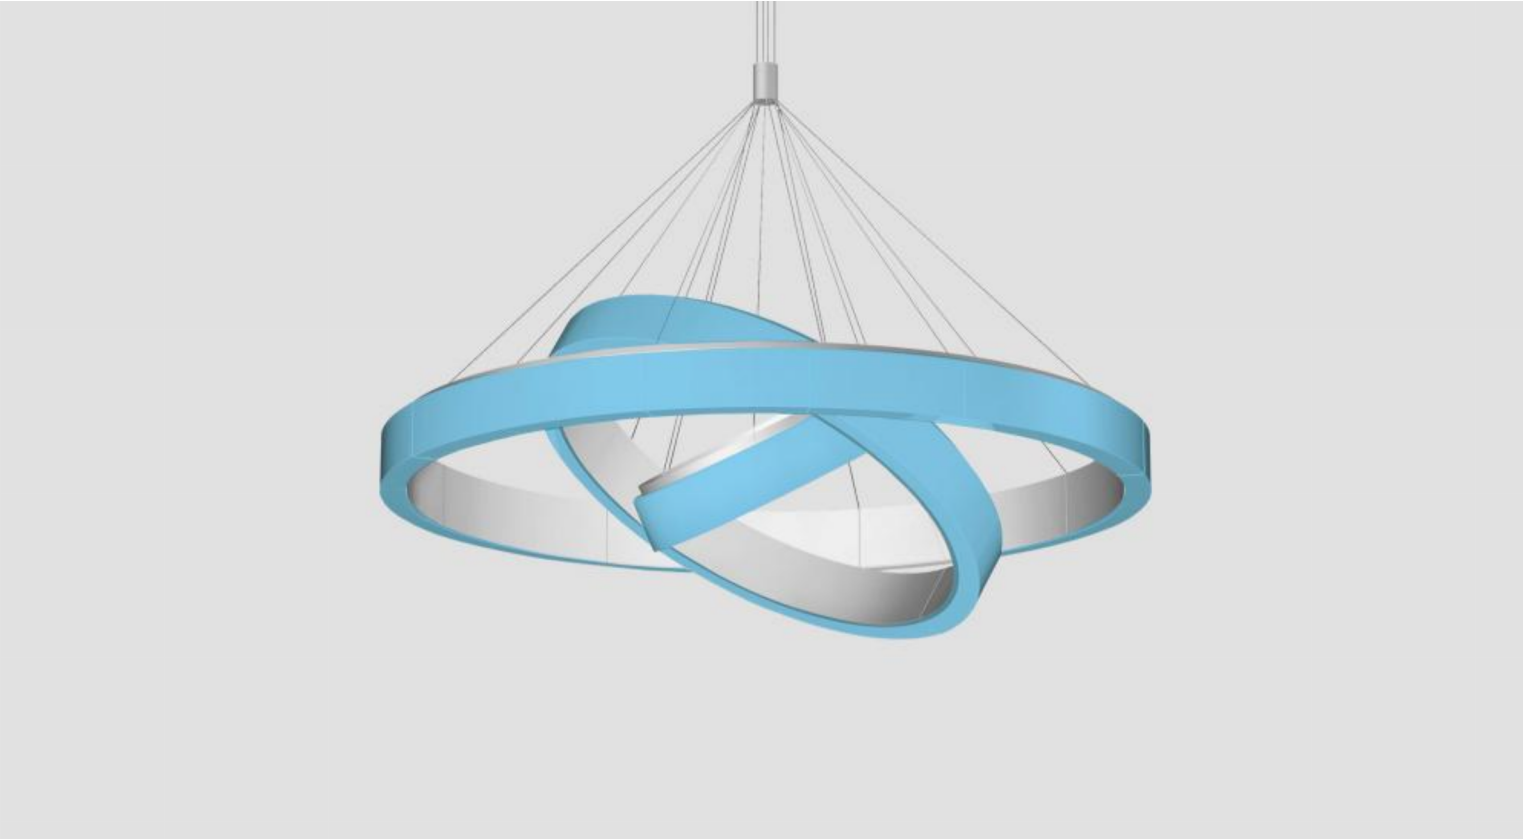

BUBBLE 3D RGB™ - SUSPENDED

GENERAL SPECIFICATION

Housing

Round metal frame consisting of modules combined together for electrical and mechanical connection. Bubble 3D supplied in the following diameters: 1000mm (39.4"), 1800mm (70.9") and 2800mm (110.0").

Drivers/power supplies

Luminaires supplied with remote electronic drivers/DMX interfaces, 120/277V. Connection of the power cords (approx. 12) to the remote drivers by others.

RGB control

Luminaires require a DMX controller by others.

Finish

White RAL 9003.

Diffusers

Injection molded, UV stabilized, opal polycarbonate. Diffusers are sectional with subtle but visible seams Bubble 1000, 3 diffusers; Bubble 1800, 8 diffusers and Bubble 2800, 16 diffusers.

Power cables

Luminaires, supplied with 13.5m/35' of cable. Cables can be extended to a maximum overall distance of 20m/64'.

Custom cable lengths can be supplied to special order.

Mechanical

Luminaires mount directly over a junction box.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

MOUNTING & OPTICS



Suspended Direct

BUBBLE 3D RGB™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

BC3DRGBP BC3DRGBP

BC3DRGBLP BC3DRGBLP

B. ACCESSORIES

150A031VE Umbrella tool for assembly/installation of Bubble 110" only. Retains structural integrity during the installation process

1. One required per order

TECHNICAL DATA

LUMINAIRE


Code	BC3DRGBP	BC3DRGBLP
Type	Adjustable	Low Profile
Power (LED)	RGB 264W+156W+80W	RGB 264W+156W+80W
Weight	286.6lb	286.6lb

APPROVALS




BUBBLE 3D RGB™ - SUSPENDED


DIMENSIONAL DIAGRAMS

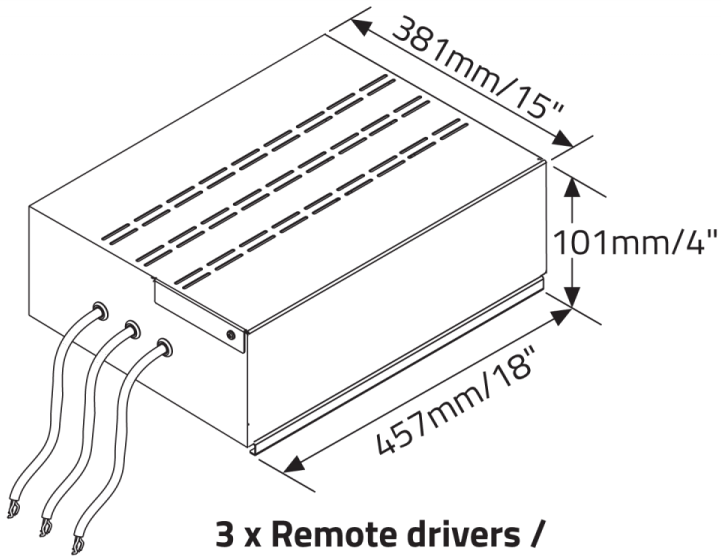


**3 x Remote drivers /
power supply included**

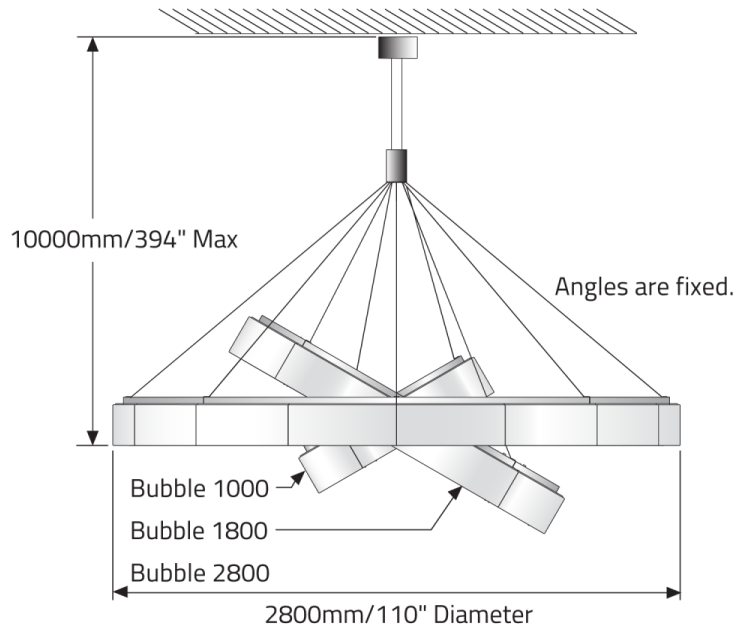

Adjustable Pendant option

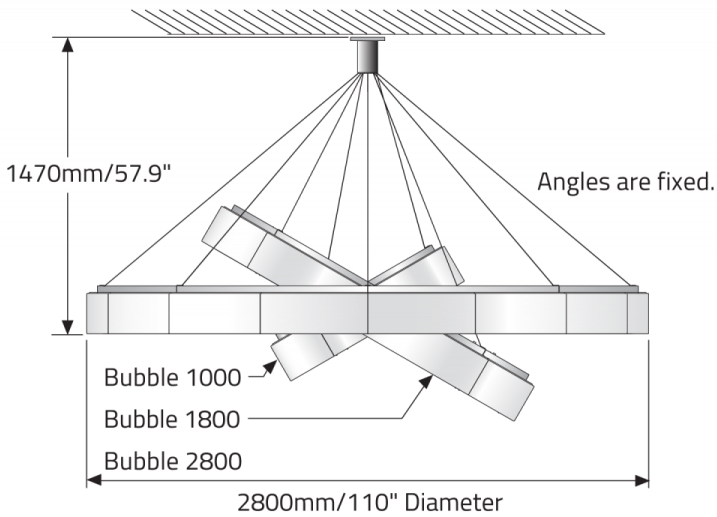


Low Profile Pendant option

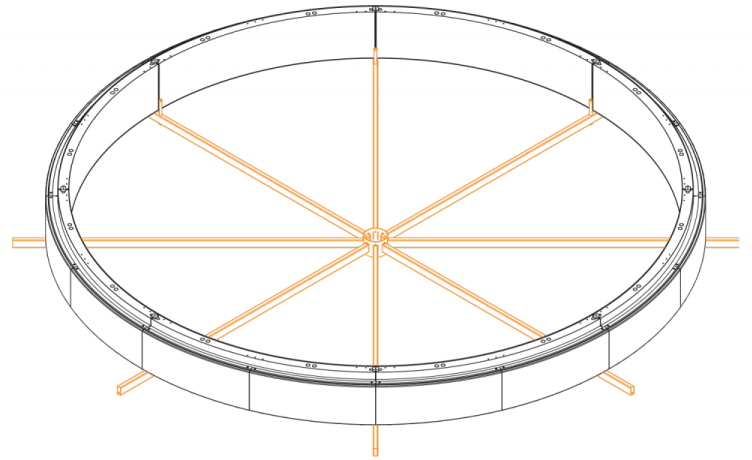

Umbrella tool for assembly



BUBBLE 3D RGB™ - SUSPENDED

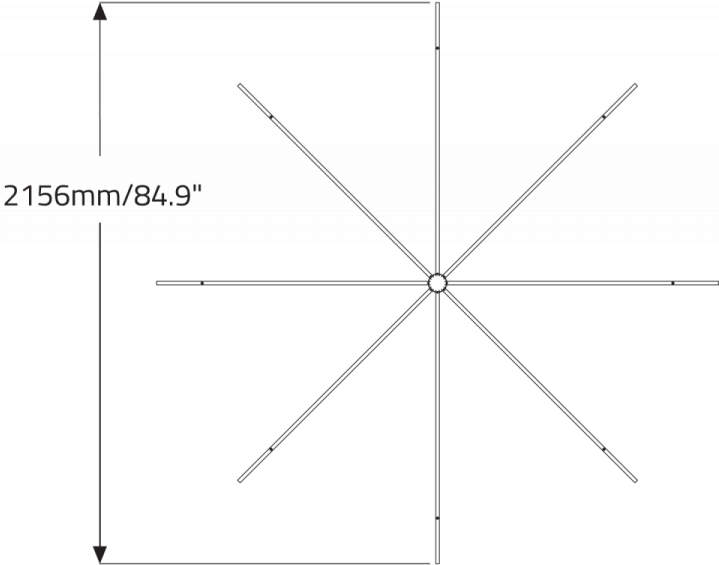

150A031VE Umbrella