

BUBBLE 3D™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



betacalco.com | +1 416-531-9942 | sales@betacalco.com

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

Jan 9, 2026

Page 1 of 5

BUBBLE 3D™ - SUSPENDED

GENERAL SPECIFICATION

Housing

: Round metal frame consisting of modules combined together for electrical and mechanical connection. Bubble 3D supplied in the following diameters: 1000mm (39.4"), 1800mm (70.9") and 2800mm (110.0").

Drivers

Luminaires supplied with two power supply box included electronic drivers 120/277V, dim 0-10V (10%). Connection of the power cords (approx 6) to the remote drivers by others.

Finish

White RAL 9003.

Lenses

Injection molded, UV stabilized, opal polycarbonate. Lenses are sectional with subtle but visible seams. Bubble 1000, 3 lenses; Bubble 1800, 8 lenses and Bubble 2800, 16 lenses.


Power cables

Luminaires, supplied with 13.5m/35' of cable. Cables can be extended to a maximum overall distance of 20m/64'. *Custom cable lengths can be supplied to special order.*


Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES



Suspended 3 sides



General Diffuse



BUBBLE 3D™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

BCBT500P BCBT500P

BCBT501LP BCBT501LP

B. CCT

30 3000K (min 80 CRI)

35 3500K (min 80 CRI)

40 4000K (min 80 CRI)

C. ACCESSORIES

150A031VE Umbrella tool for assembly/installation of Bubble (required only for 110" dia.). Retains structural integrity during the installation process

1. One required per order

TECHNICAL DATA

LUMINAIRE





Code	BCBT500P	BCBT501LP
Type	Adjustable	Low Profile
Power (LED)	564W+333W+173W	564W+333W+173W
Delivered lms	70753	70753
Weight	286.6lb	286.6lb

APPROVALS




BUBBLE 3D™ - SUSPENDED

DIMENSIONAL DIAGRAMS

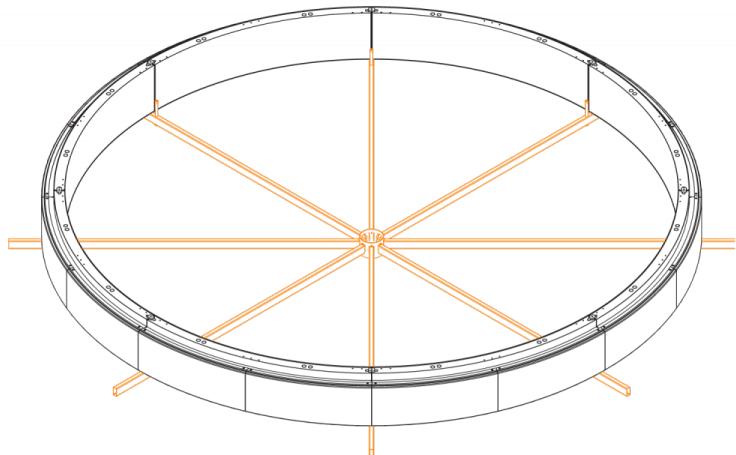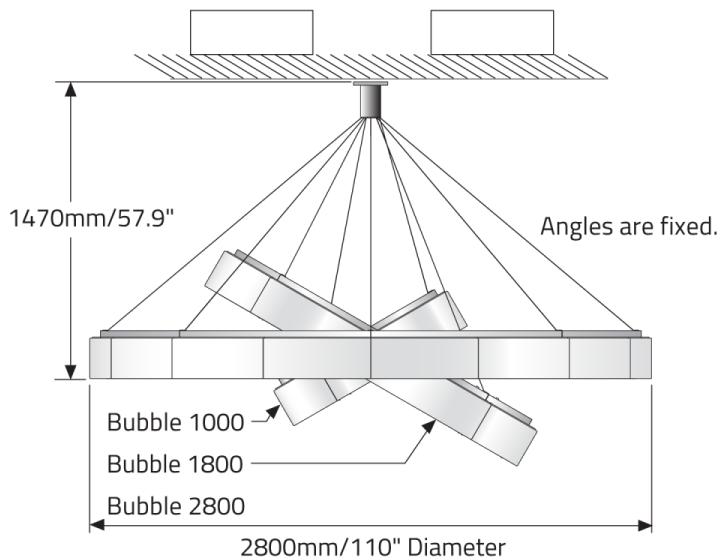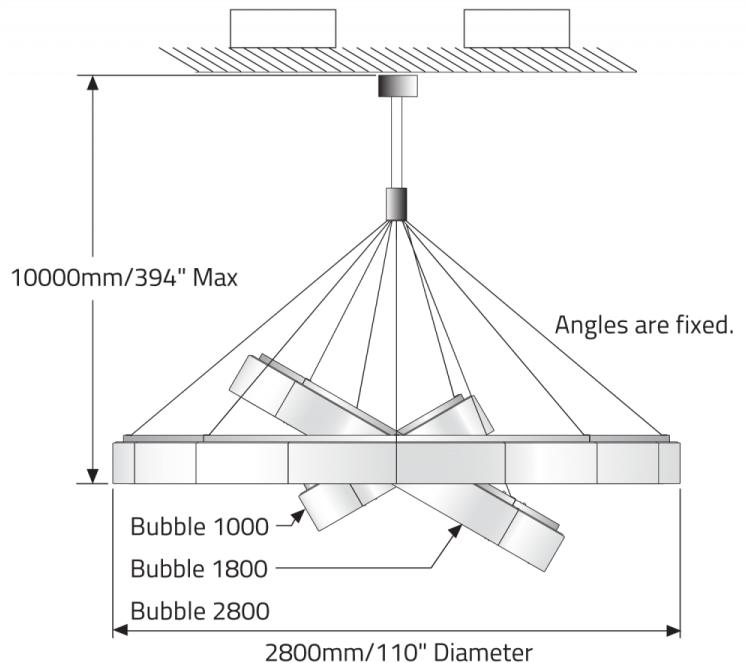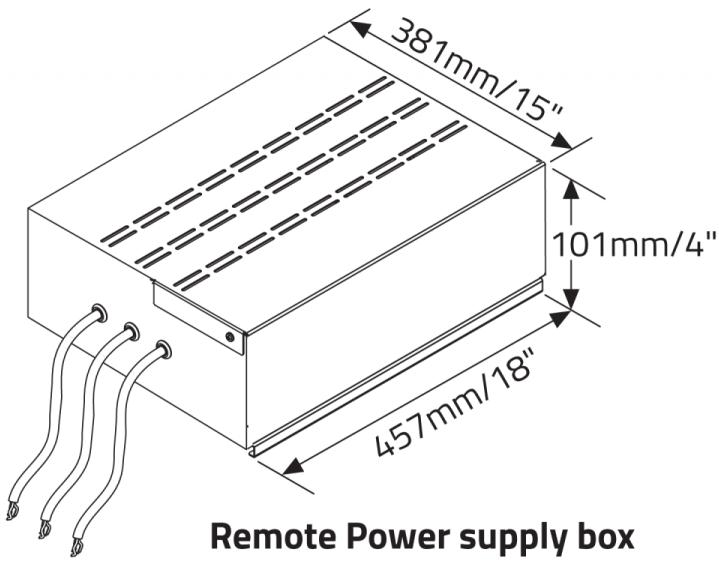

BUBBLE 3D™ - SUSPENDED

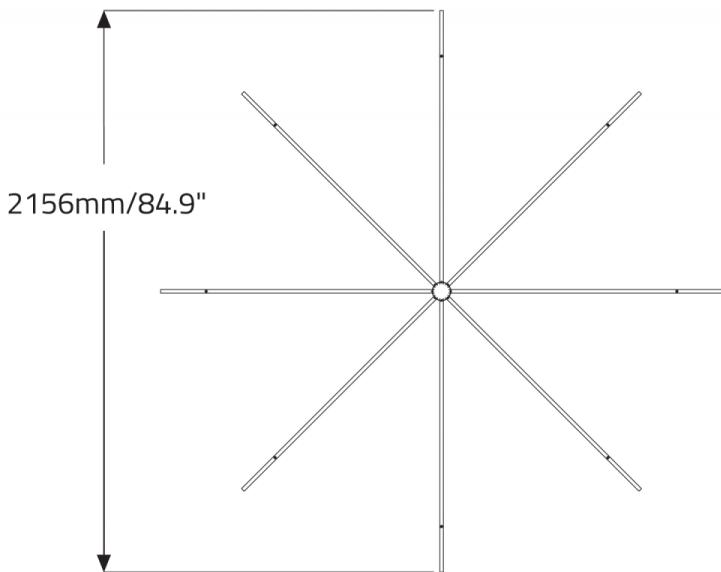

150A031VE UMBRELLA